

MINIFOCUS	Per 1 lampada TC-TEL 18W Gx24q-2	S.1160	PESO 5,1 KG
	Per 1 lampada HIT-TC CRI 20W G8,5	S.1162	PESO 5,1 KG
	Per 1 lampada HIT-TC CRI 35W G8,5	S.1163	PESO 5,1 KG
	7 ACCENT LED 17,5W	S.1165 / S.1165W / S.1167	PESO 5,1 KG
FOCUS	Per 1 lampada TC-TEL 26-32-42W GX24q-3/4	S.1170	PESO 9,2 KG
	Per 1 lampada HIT-CRI 70W G12	S.1172	PESO 10,5 KG
	Per 1 lampada HIT-CRI 150W G12	S.1173	PESO 11,4 KG
	21 ACCENT LED 52,5W	S.1175 / S.1175W / S.1177	PESO 9,6 KG
	1 COB LED	S.1176W / S.1176N	PESO 9,6 KG

CARATTERISTICHE TECNICHE

CLASSE I IP 66

0.5m Mantenere almeno 0,5m di distanza tra l'apparecchio e la superficie illuminata

ISTRUZIONI DI MONTAGGIO


- Aprire la scatola di cablaggio (A) allentando i 3 grani m6
- Inserire il cavo tripolare (D.8-12 mm) nel passafilo entrando con la doppia guaina x max10mm
- Fissare alla superficie di montaggio la basetta (B) con sistemi idonei, posizionando la guarnizione (C) tra basetta e superficie di montaggio
- Effettuare il cablaggio elettrico
- Fissare il cavo di sicurezza all'apposito gancio, riposizionare la scatola facendo coincidere le due parti del sezionatore e bloccare i 3 grani M6. Serrare il pressacavo
- Aprire l'apparecchio, inserire la lampada indicata nei dati di targa e richiudere l'apparecchio.

AVVERTENZE:

- Non superare la potenza indicata nei dati di targa
- La presa di terra è obbligatoria per i prodotti in CLASSE I
- Togliere tensione prima di effettuare manutenzioni
- In caso di rottura sostituire il diffusore prima di riutilizzare l'apparecchio
- Aprire la parte inferiore del prodotto (D) solo in caso di manutenzione straordinaria e mai con il prodotto installato - Rimuoverlo sempre prima di aprire D

NOTE: FOCUS SOSPENSIONE è un apparecchio sofisticato e deve essere installato da un elettricista qualificato

Il rispetto di queste norme è molto importante per l'efficienza dell'apparecchio e per la sicurezza delle persone, pertanto esse vanno conservate

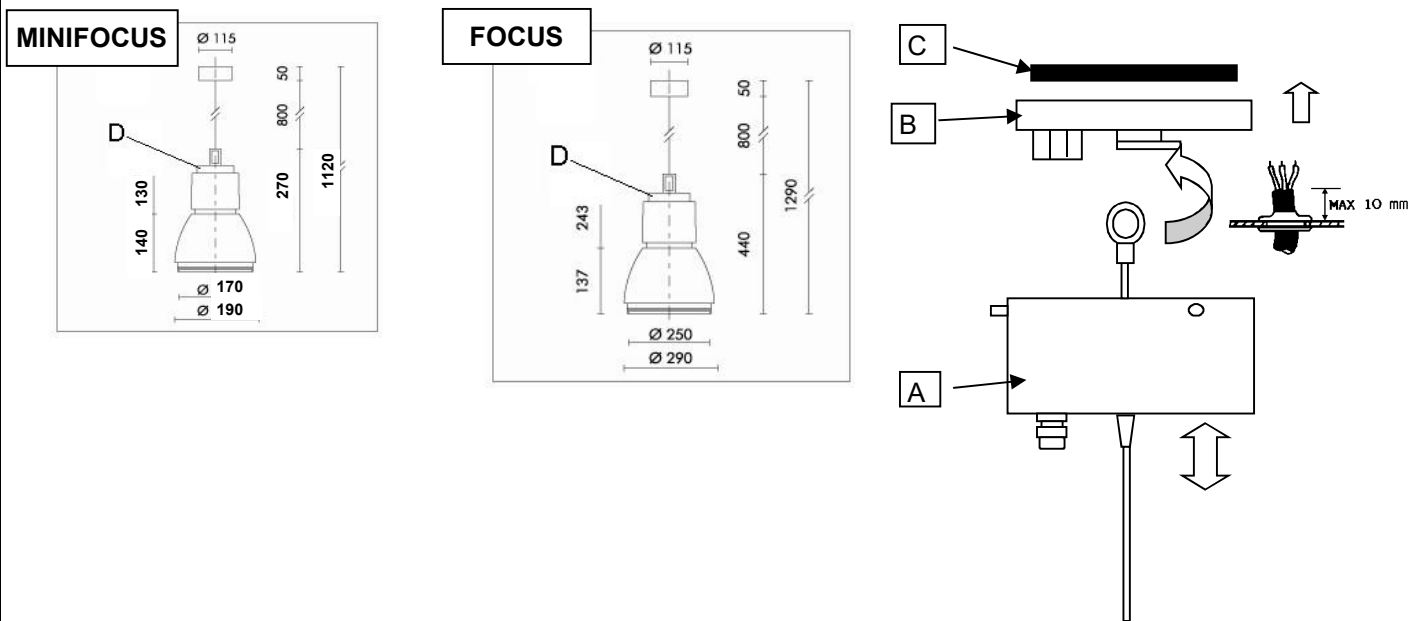

MINIFOCUS	For 1 lamp TC-TEL 18W Gx24q-2	S.1160	WEIGHT 4,2 KG
	For 1 lamp HIT-TC CRI 20W G8,5	S.1162	WEIGHT 4,4 KG
	For 1 lamp HIT-TC CRI 35W G8,5	S.1163	WEIGHT 4,4 KG
	7 ACCENT LED 17,5W	S.1165 / S.1165W / S.1167	WEIGHT 4,4 KG
FOCUS	For 1 lamp TC-TEL 26-32-42W GX24q-3/4	S.1170	WEIGHT 9,2 KG
	For 1 lamp HIT-CRI 70W G12	S.1172	WEIGHT 10,5 KG
	For 1 lamp HIT-CRI 150W G12	S.1173	WEIGHT 11,4 KG
	21 ACCENT LED 52,5W	S.1175 / S.1175W / S.1177	WEIGHT 9,6 KG
	1 COB LED	S.1176W / S.1176N	PESO 9,6 KG

TECHNICAL INFORMATION:

CLASS I IP 66

0.5m Minimum distance between fitting and lighted surface = 0,5m

INSTALLATION INSTRUCTION:

Open the Connection box (A) unscrewing the 3 M6 screw
 Insert the 3 core supply cable (D.8-12 mm) into the grommet for max10mm and separate the single wires
 Install the fixation plate (B) to the ceiling with 3 proper screws (not supplied), positioning the rubber (C) between fixation plate and ceiling.
 Connect the single wires to terminal block
 Fit the security cable to its position, re install the connection box (be carefull to terminal block position) and lock the 3 M6 screws. Close the cable gland
 Open the front part of luminaire, install the right lamp and then close it.

RECOMMENDATIONS:

Do not exceed the maximum wattage-see internal label
 The fitting must be earthed (for CLASS I fittings)
 Disconnect the power before maintenance
 In case of glass damage, replace it before using the fitting
 Open the back part of luminaire (D) only for extraordinary maintenance and never with luminaire suspended!!!!!!!!!!!!

NOTE:

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations
 Is very important to follow these instructions to, enable the fitting to be installed correctly. Please retain for information.