


MEGASLOT PARETE

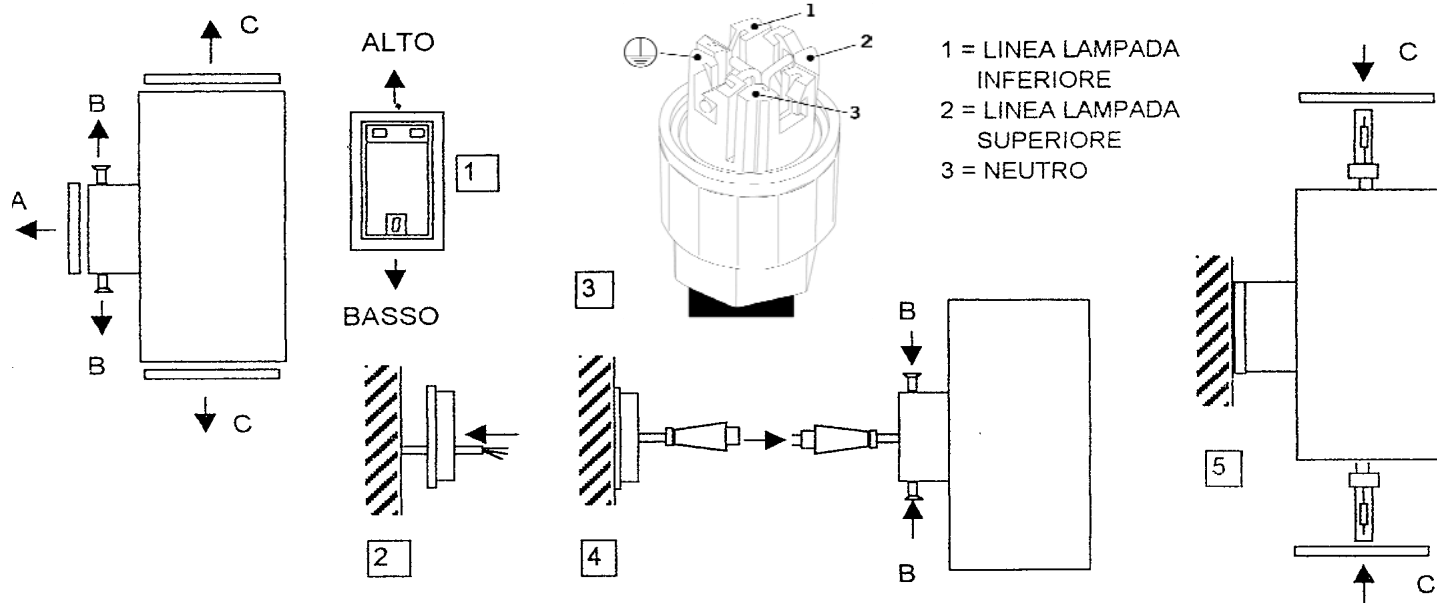

MEGASLOT UP AND DOWN Per 2 lampade ioduri metallici 150W G12

Art.S.3949

MEGASLOT DOWN Per 1 lampada ioduri metallici 150W G12

Art.S.3939


N.B. : UTILIZZARE SOLO LAMPADE UV STOP

CARATTERISTICHE TECNICHE

Predisposto per accensioni separate (S.3949)

CLASSE I

IP 65



Mantenere almeno 0,5m di distanza tra l'apparecchio e la superficie illuminata.

ISTRUZIONI DI MONTAGGIO

Rimuovere la flangia di fissaggio a parete (A) svitando le viti (B)

Aprire l'apparecchio rimuovendo gli anelli e i vetri (C)

Installare la flangia di fissaggio a parete mediante N°3 tasselli tipo fisher (non forniti) come da disegno 1

Collegare il cavo di alimentazione (Dmin=6mm Dmax=12mm) al connettore presa (in dotazione) seguendo lo schema

1=LINEA LAMPADA INFERIORE 2=LINEA LAMPADA SUPERIORE (solo per S.3949) 3=NEUTRO

Collegare tra di loro il connettore presa ed il connettore spina

Inserire le lampade indicate nei dati di targa e regolare l'inclinazione dei riflettori come desiderato (+/- 20°)

Richiudere l'apparecchio reinstallando gli anelli e i vetri (C)

AVVERTENZE:

Non superare la potenza indicata nei dati di targa.

La presa di terra è obbligatoria.

Togliere tensione prima di effettuare manutenzioni.

Usare cavi di alimentazione di tipo <HAR>

In caso di rottura sostituire il diffusore prima di riutilizzare l'apparecchio.

Non entrare nel connettore presa con fili singoli.

MEGASLOT PARETE è un apparecchio sofisticato e deve essere installato da un elettricista qualificato




Apparecchio approvato per servizio gravoso

Il rispetto di queste norme è molto importante per l'efficienza dell'apparecchio e per la sicurezza delle persone, pertanto esse vanno conservate.

SIMES
luce per l'architettura

ISTRMEGSLTPA REV.3 09/11

MEGASLOT WALL BRACKET

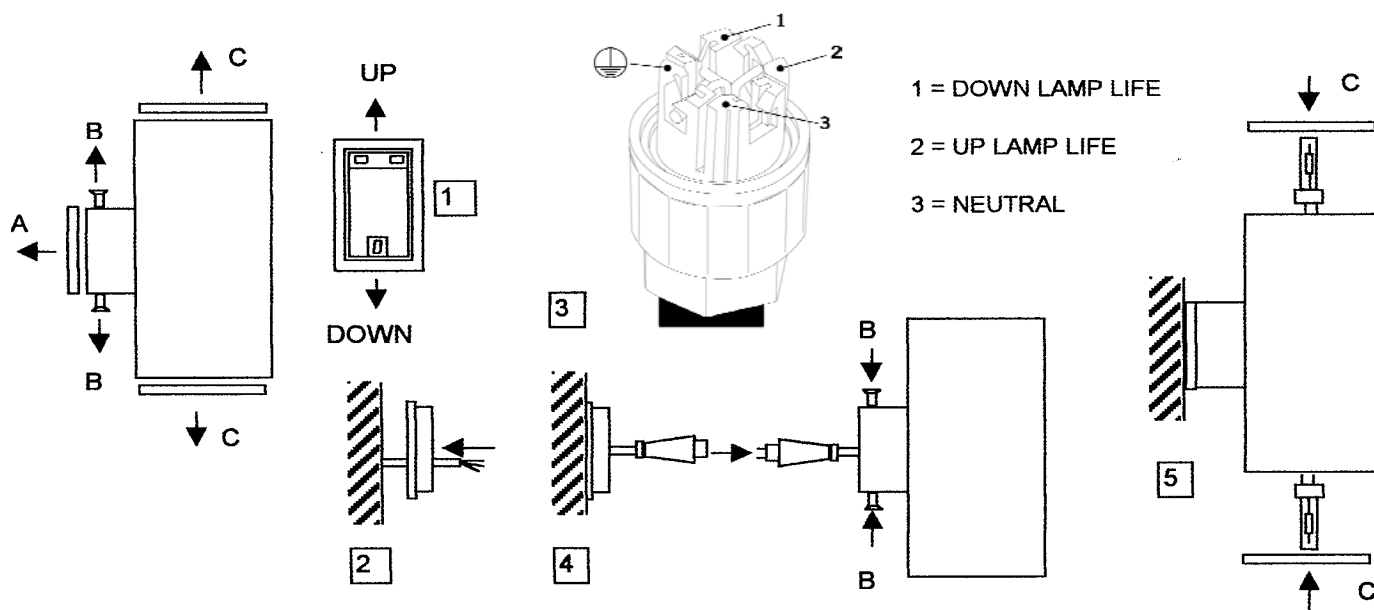

MEGASLOT UP AND DOWN

For 2 metal halide lamps 150W G12

Art. S.3949

MEGASLOT DOWN

For 1 metal halide lamp 150W G12

Art. S.3939


N.B. : USE UV STOP LAMPS ONLY

TECHNICAL INFORMATION:

Pre-wired for double switch-on (For S.3949)

CLASS I

IP 65



Minimum distance between fitting and lighted surface = 0,5m.

INSTALLATION INSTRUCTION:

Remove the fixation plate (A) unscrewing the screws (B)

Open the fitting and remove rings and glasses (C)

Install the fixation plate to the wall with 3 screws (not supplied) following drawing 1

Connect the supply cable (Dmin=6mm Dmax=12mm) to the power point connector (supplied) following the scheme

1=LIFE FOR DOWN LAMP 2=LIFE FOR UPPER LAMP (only for S.3949) 3=NEUTRAL

Connect the power point connector with the plug connector (pre-installed on the fitting)

Insert the fitting on the fixation plate and lock the screws (B)

Insert the correct lamps and adjust the reflectors as on your request (+/- 20°)

Close the fitting re-installing glasses and rings (C)

RECOMMENDATIONS:

Do not exceed the maximum wattage-see internal label.

The fitting must be earthed.

Disconnect the power before maintenance.

Use <HAR> cable.

In case of glass damage, replace it before using the fitting.

Do not enter with single wires into the power point connector.



Fitting approved for rough service

Installation should be carried out by a suitably qualified person in accordance with good electrical practice and the appropriate national wiring regulations.

Is very important to follow these instructions to, enable the fitting to be installed correctly. Please retain for information.

SIMES
luce per l'architettura

ISTRMEGSLTPA REV.3 09/11