







Blitz

Wall effect

BLITZ is an extremely versatile lighting system with its countless possible variations. BLITZ allows to create dazzling scenographic lighting effects that can make the most of any environment.



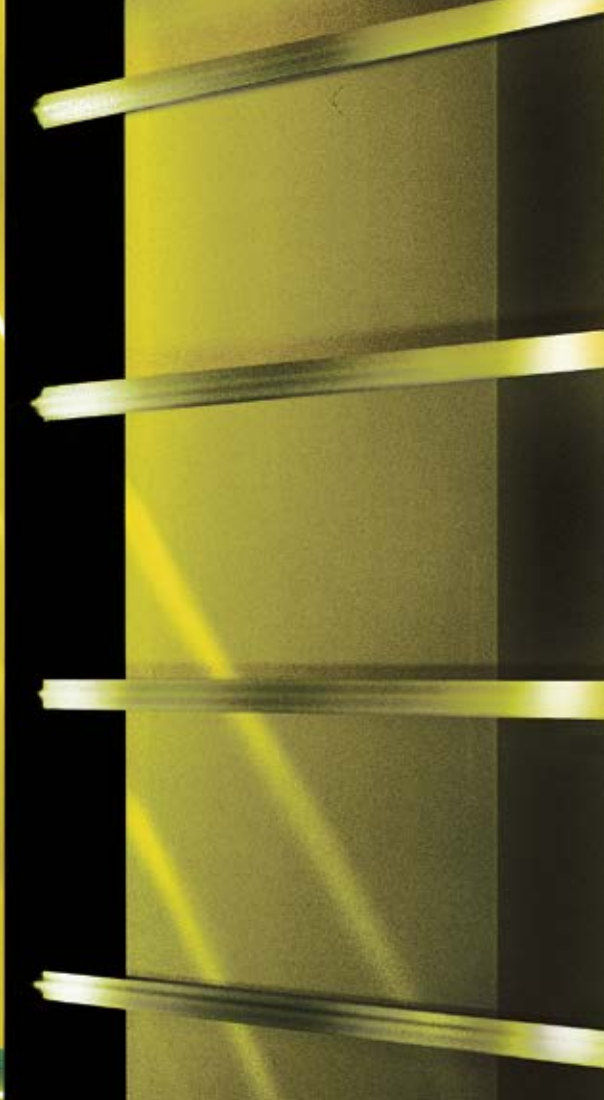

Simes Headquarter, Corte Franca, Italy © SIMES S.p.a.

BLITZ

Die-cast EN AB-47100 aluminium housing with high corrosion resistance.
Reflector in polymers covered with 99.98% pure aluminium.
Toughened glass lenses.
Stainless steel screws.
Luminaire suitable for double cable glands.
Silicone gaskets.
Double powdered paint.

Colour:

○ Aluminium grey (code 14)

Protection class
IP65

Isolation class
CLASS I ⊕

Mechanical resistance of glass
IK 10

Leds 4000K CRI90 versions are available on request.

For the latest technical information and product updates with LED technology please refer to the official website (www.simes.it)



S.3554

STAKE in polypropilene.
Colour: black (code 09)
Total length 420 mm
The 90 mm upper part must stay out of the ground level, according with the norms.



COLOURED DICHOIC LENSES
Lenses to be installed inside of the BLITZ instead of the standard ones.

narrow beam 6°

S.4056 Red
S.4057 Blue
S.4058 Yellow
S.4059 Green




medium beam 44°

S.4076 Red
S.4077 Blue
S.4078 Yellow
S.4079 Green

wide beam 88°


S.4071 Red
S.4072 Blue
S.4073 Yellow
S.4074 Green

1 Wide beam





S.4052W

With led COB white **3000K** CRI90 1850lm
 Rated luminaire luminous flux 290lm
 Rated input power 18,2W 230V




1 Narrow beam






S.4049W

With led COB white **3000K** CRI90 1850lm
 Rated luminaire luminous flux 67lm
 Rated input power 18,2W 230V




1 Wide beam + 1 Narrow beam




S.4053W

With led COB white **3000K** CRI90 1850lm
 Rated luminaire luminous flux 357lm
 Rated input power 18,2W 230V




2 Medium beams





S.4060W

With led COB white **3000K** CRI90 1850lm
 Rated luminaire luminous flux 129lm
 Rated input power 18,2W 230V





2 Windows 180° narrow beams




S.4069W

With led COB white **3000K** CRI90 1850lm
 Rated luminaire luminous flux 157lm
 Rated input power 18,2W 230V





2 Windows 90° narrow beams





S.4030W

With led COB white **3000K** CRI90 1850lm
 Rated luminaire luminous flux 153lm
 Rated input power 18,2W 230V





4 Medium beams





S.4080W

With led COB white **3000K** CRI90 1850lm
 Rated luminaire luminous flux 277lm
 Rated input power 18,2W 230V



4 Narrow beams



S.4089W

With led COB white **3000K** CRI90 1850lm
 Rated luminaire luminous flux 303lm
 Rated input power 18,2W 230V

