




Continuous line

Walk over

CONTINUOUS LINE is a walk-over fitting designed to create paths of light with perfect uniformity and unlimited length. Extremely easy to install, this product can transform any space with class and refinement.

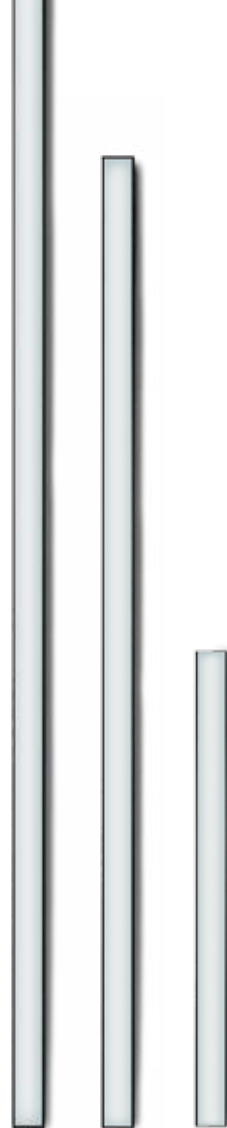

Runner

Step recessed

Runner is a step recessed product to be installed on the riser and perfectly flush to the wall. The two ends wings of the recessing box can be easily shortened to vary the length of the product from 300mm to 280mm or from 1025mm to 1000mm. Runner must be installed with its recessing box.





Giardino della Pace, Sotto il Monte, Bergamo, Italy © SIMES S.p.A.

CONTINUOUS LINE Walk over

To-be-fixed supports and recessing box in extruded anodized EN AW-6060 aluminium housing (copper free) with high corrosion resistance.
Toughened glass diffuser 15 mm thick for CONTINUOUS LINE FULL-GLASS.
Extruded polycarbonate diffuser 3mm thick for CONTINUOUS LINE POLYCARBONATE.
Luminaire hard wired with single neoprene cable with cable gland.
Fixing bases and recessing box included.
Fast connector IP67 included.

Maximum weight 500 Kg

Colour:

○ Anodized aluminium (code 13)

Protection class

IP67

Isolation class

CLASS III ⚡

Mechanical resistance of diffuser

IK 09



Power supply not included

Leds 4000K CR180 versions are available on request.

PATENTED 2013


For the latest technical information and product updates with LED technology please refer to the official website (www.simes.it)

Continuous line fullglass 500 mm


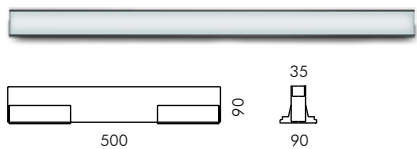


S.7016W

With leds white **3000K** CR180 360lm
 Rated luminaire luminous flux 101lm
 Rated input power 5,5W **24V**
 Requires remote power supply
 230V/24V DC (type S.3407)
 T 39°C




Continuous line fullglass 1000 mm


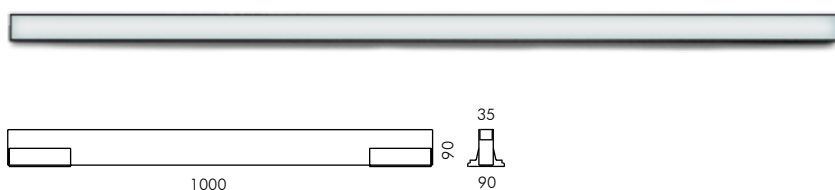


S.7011W

With leds white **3000K** CR180 740lm
 Rated luminaire luminous flux 202lm
 Rated input power 11W **24V**
 Requires remote power supply
 230V/24V DC (type S.3407)
 T 39°C




Continuous line fullglass 1500 mm

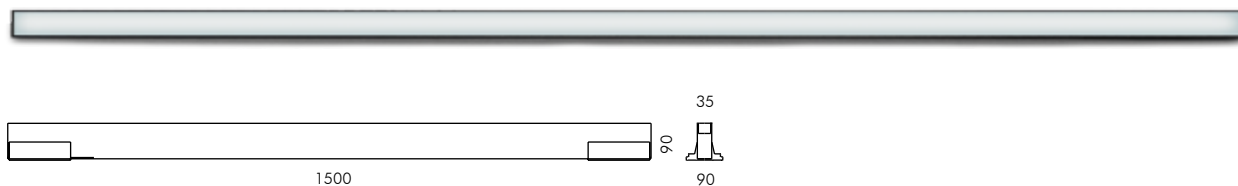


S.7012W

With leds white **3000K** CR180 1100lm
 Rated luminaire luminous flux 300lm
 Rated input power 16,5W **24V**
 Requires remote power supply
 230V/24V DC (type S.3407)
 T 39°C




CONTINUOUS LINE Polycarbonate

Continuous line polycarbonate 500 mm




S.7005

With leds RGB
 Rated input power 10W **24V PWM**
 Requires remote power supply
 230V/24V PWM (type S.3413)
 Requires remote DMX control unit
 (type S.3493)





S.7006W

With leds white **3000K** CRI80 360lm
 Rated luminaire luminous flux 101lm
 Rated input power 5,5W **24V**
 Requires remote power supply
 230V/24V DC (type S.3407)




T 39°C

Continuous line polycarbonate 1000 mm

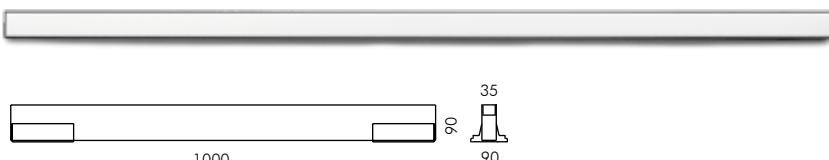


S.7000

With leds RGB
 Rated input power 21W **24V PWM**
 Requires remote power supply
 230V/24V PWM (type S.3413)
 Requires remote DMX control unit
 (type S.3493)





S.7001W

With leds white **3000K** CRI80 740lm
 Rated luminaire luminous flux 202lm
 Rated input power 11W **24V**
 Requires remote power supply
 230V/24V DC (type S.3407)



T 39°C

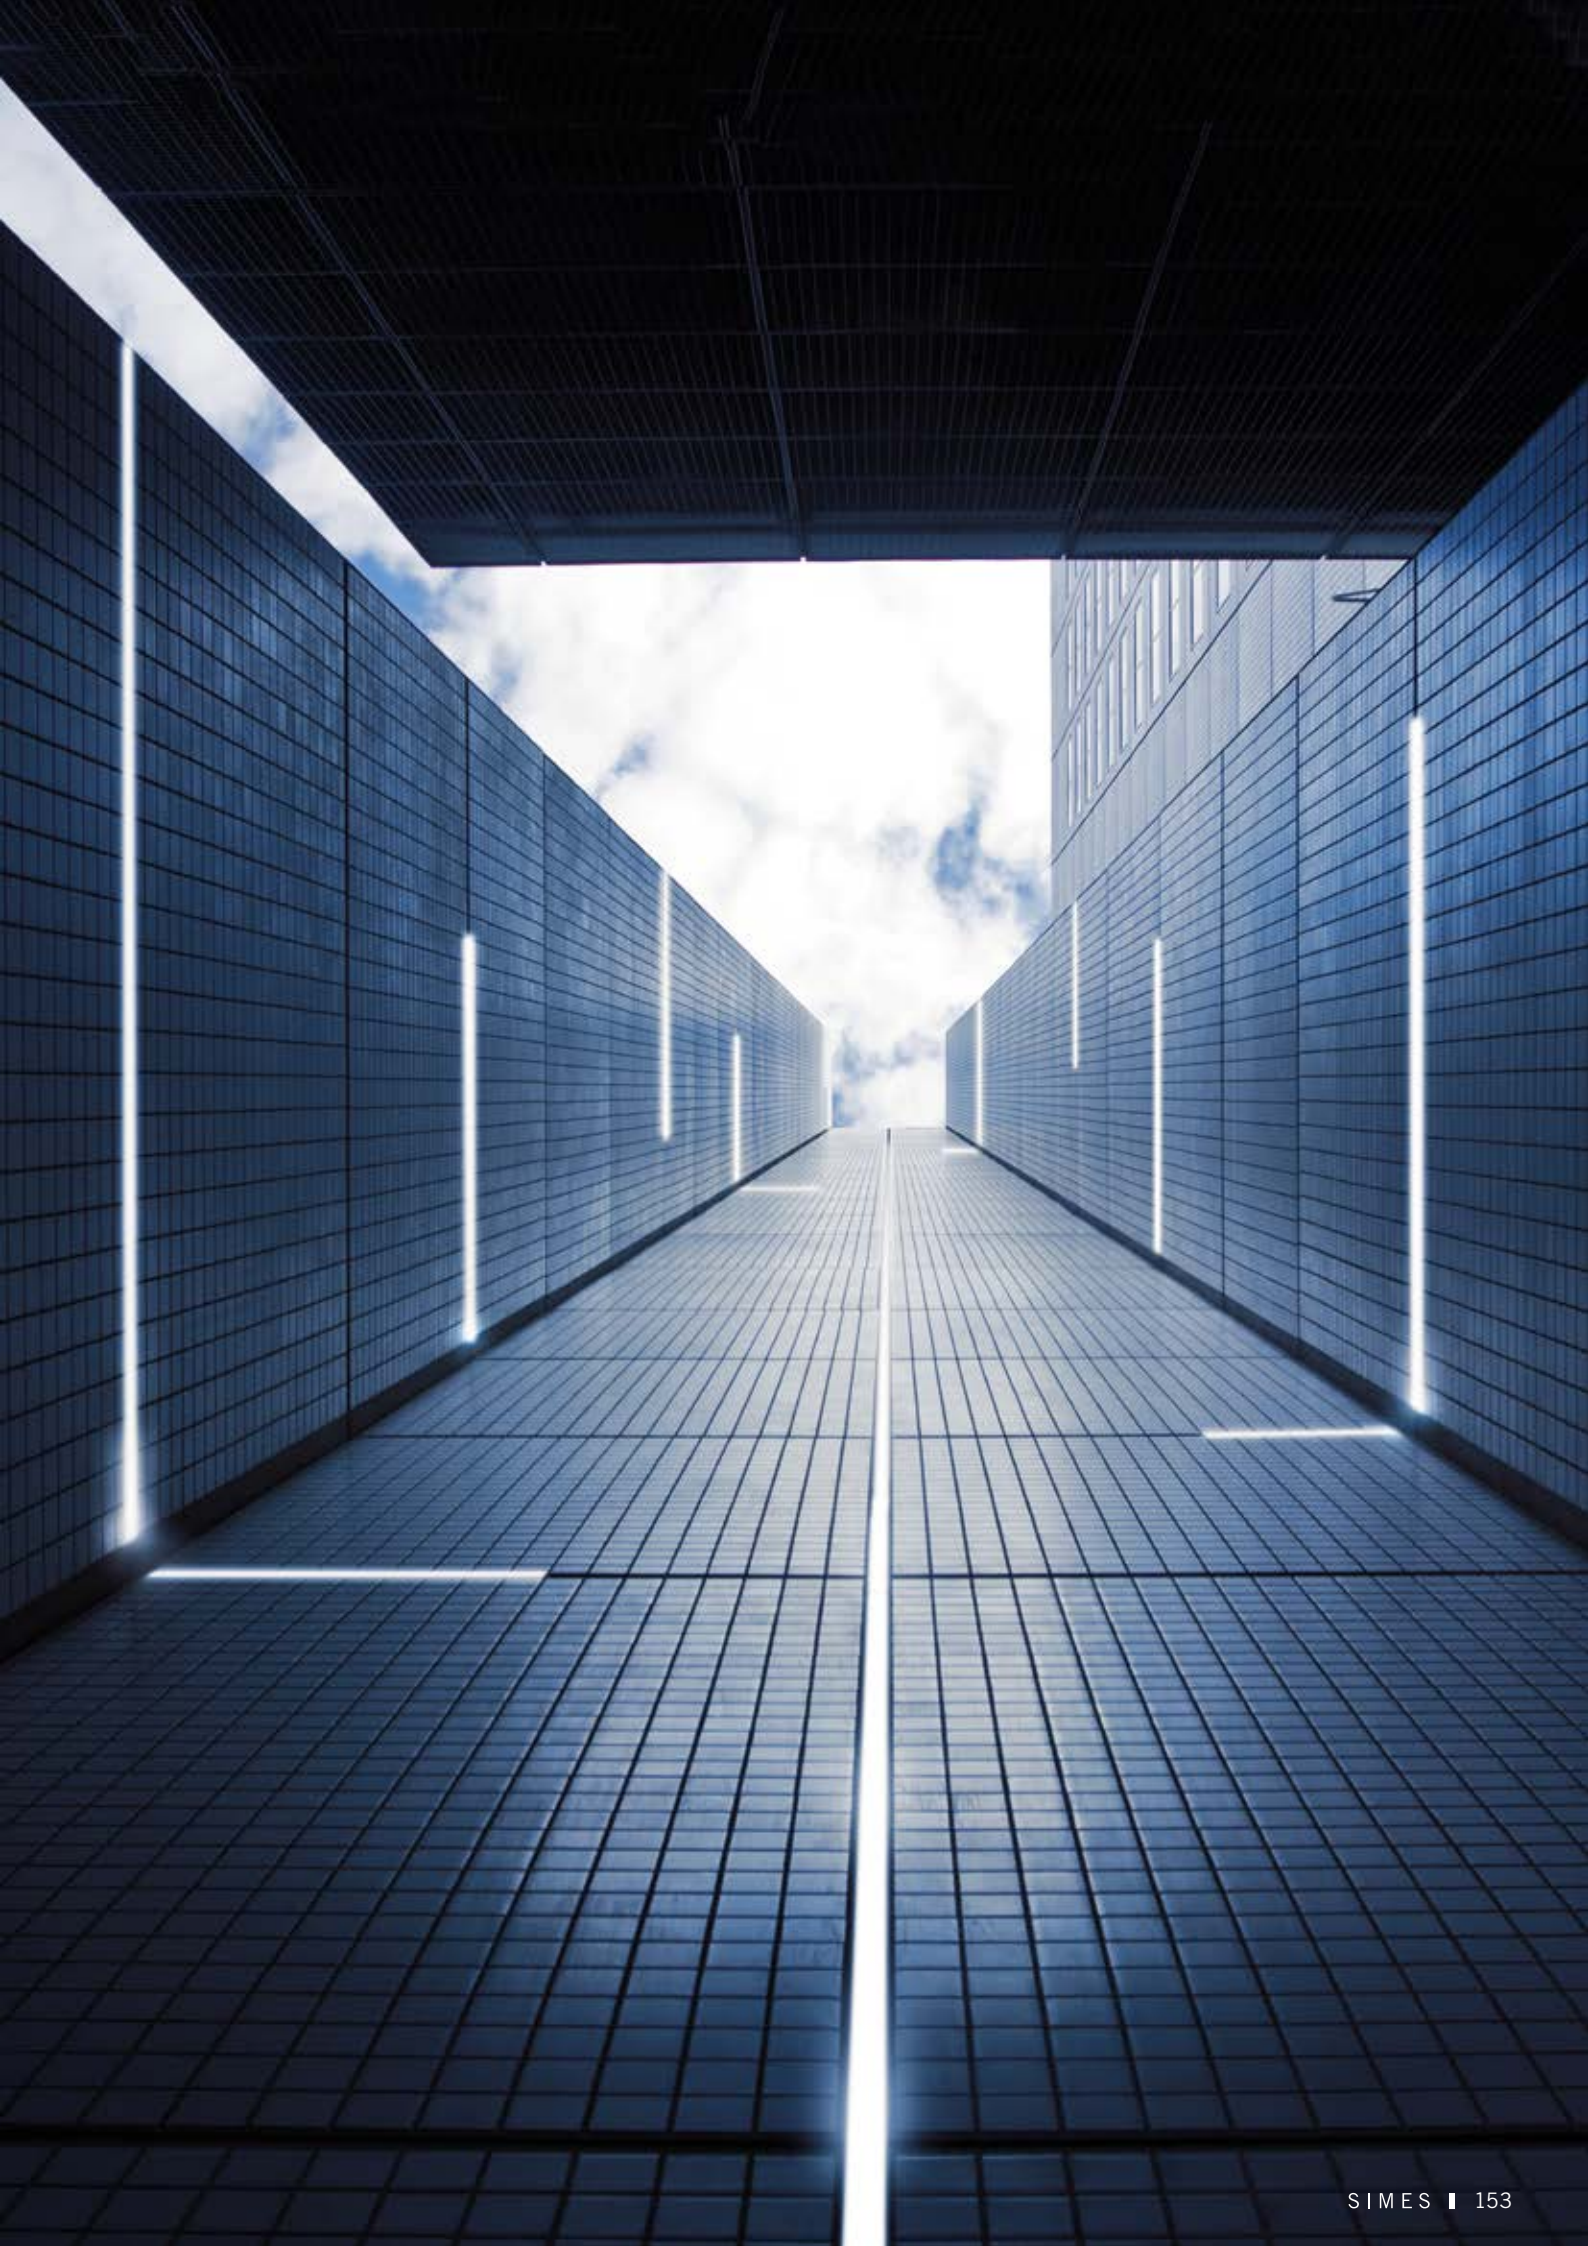

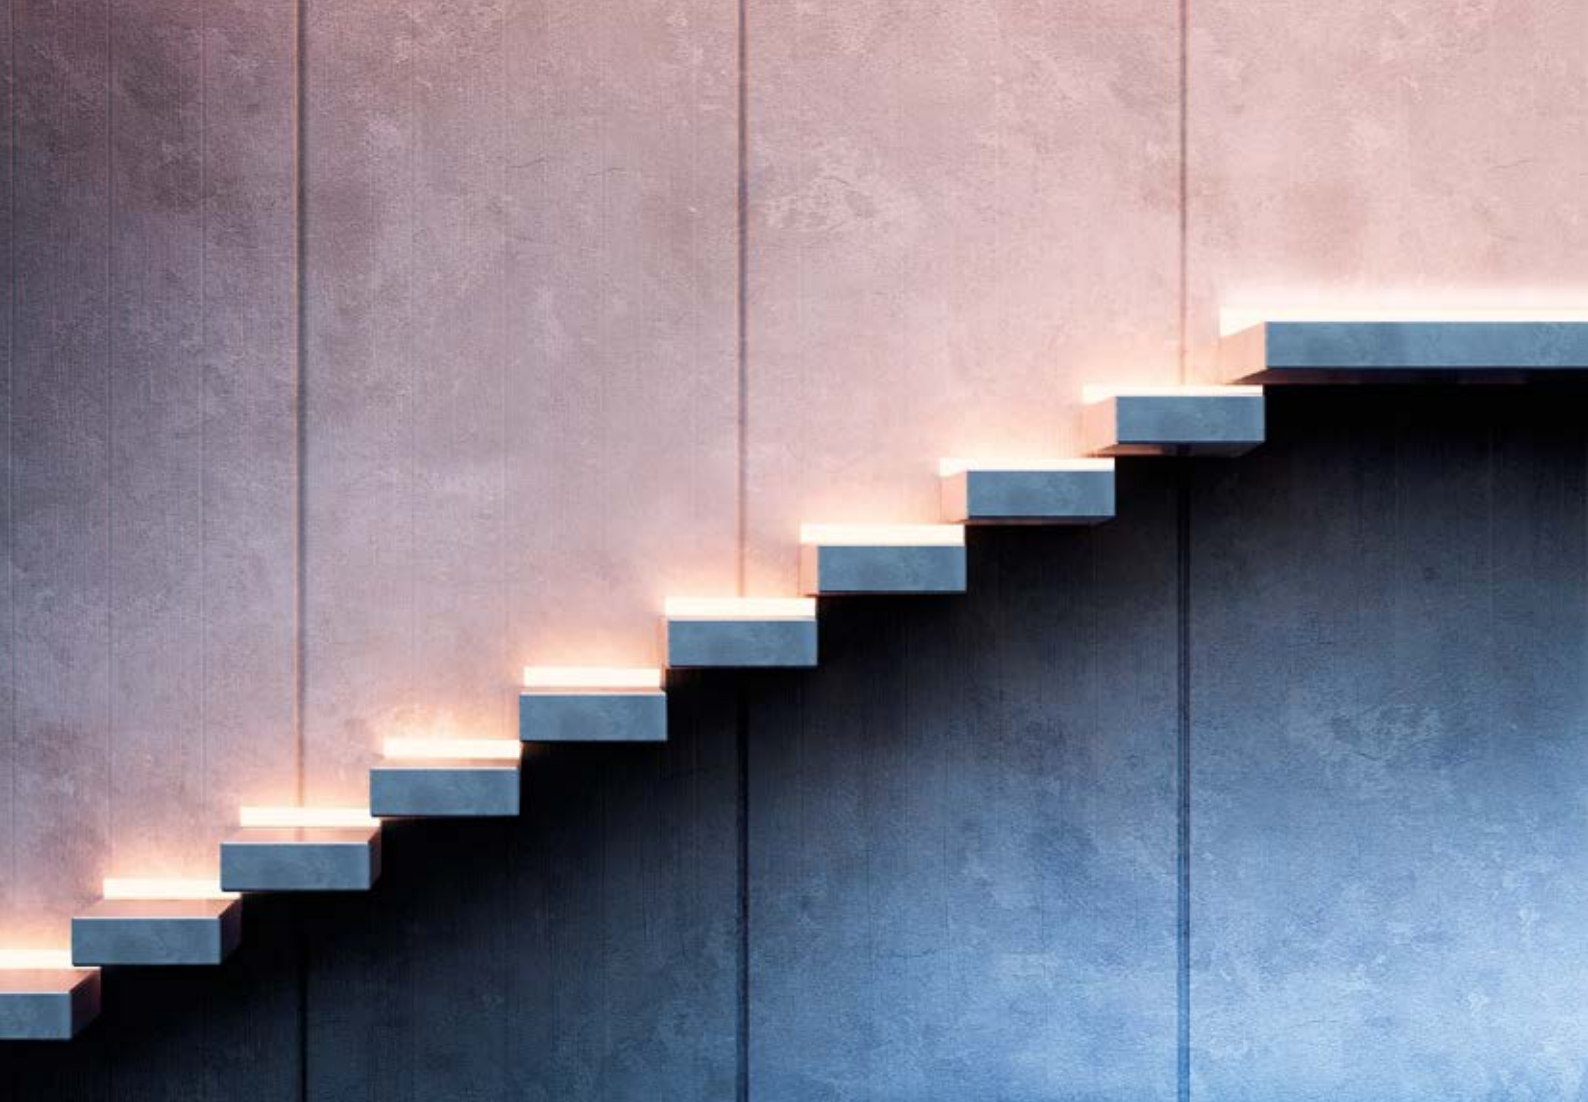


RUNNER Step recessed

Fixed supports and recessing box in extruded anodized EN AW-6060 aluminium housing (copper free) with high corrosion resistance. Toughened glass diffuser 15 mm thick. Luminaire hard wired with single neoprene cable. Fast connector IP67 included.

Finishing:

○ Anodized aluminium (code 13)

Protection class
IP65


Isolation class
CLASS II 

Mechanical resistance of glass
IK 10


For the latest technical information and product updates with LED technology please refer to the official website (www.simes.it)

Runner must be installed with its recessing box.

Runner is a step recessed product to be installed on the riser and perfectly flush to the wall. The two ends wings of the recessing box can be easily shortened to vary the length of the product from 300mm to 280mm or from 1025mm to 1000mm.

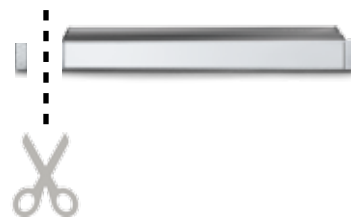


Runner 300 mm



S.7020W


With leds white **3000K** CRI80 315lm
 Rated luminaire luminous flux 52lm
 Rated input power 3,7W 230V
 Recessing box not included
Spring lock system for a total absence of visible screws.



S.7029


RECESSING BOX
 for RUNNER 300 mm
 300 x 35 mm
 Depth 87 mm

Runner 1000 mm



S.7025W

With leds white **3000K** CRI80 1260lm
 Rated luminaire luminous flux 156lm
 Rated input power 15W 230V
 Recessing box not included
Spring lock system for a total absence of visible screws.



S.7030

RECESSING BOX
 for RUNNER 1000 mm
 1025 x 35 mm
 Depth 87mm