






# LOOK

## Applique and bollard

LOOK is one of the latest LED luminaires from SIMES, engineered to maximize the LED power, whilst minimizing the size and energy consumption. Available in different versions, as wall mounted and as bollard, LOOK family introduces a new way to light up outdoor spaces. Confirming the SIMES high quality standards, these fittings are made using aluminum with low content of copper and highly robust glass. LOOK has an elegant rectangular body, minimal and compact, mounted on wall or on its bollard. The light is directed on one side through a glass window.

2015



[www.simes.it/look](http://www.simes.it/look)



Private Villa, Sulzano (Brescia) Italy © Mario Bertani

## LOOK Applique and bollard

Die-cast EN AB-47100 aluminium housing, extruded EN AW-6060 aluminium structure (bollard version) with high corrosion resistance. Toughened glass diffuser. Stainless steel screws. Luminaire supplied with 1m of cable (Minilook L 220mm). Luminaire with one single cable entry and grommet (Look L 290mm Applique). Pre-wired luminaire with neoprene cable and connector (Bollard). Silicone gaskets.  
**Double powder paint.**

### Colours:


- White (code 01)
- Aluminium grey (code 14)
- Burnished bronze (code 20)

### Protection class

IP65

### Isolation class

CLASS II 

CLASS I  MICROLOOK and LOOK 290mm (Applique)

### Mechanical resistance

IK 06 Minilook 220mm and Look Bollard 290mm  
 IK 04 Look 290mm



Leds 4000K CR190 versions are available on request.

*For the latest technical information and luminaire updates with LED technology please refer to [www.simes.it](http://www.simes.it)*

**REGISTERED DESIGN**



### S.7219

#### FLANGE FOR MICROLOOK BOLLARD 125 mm

Steel flange with stainless steel screws (to be buried in concrete) S.7212W and S.7213W.



### S.7249

#### FLANGE FOR MINILOOK BOLLARD 220 mm

Steel flange with stainless steel screws (to be buried in concrete) S.7206W, S.7215W, S.7211W and S.7220W.



### S.7269

#### FLANGE FOR LOOK BOLLARD 290 mm


Steel flange with stainless steel screws (to be buried in concrete) S.7260W, S.7265W, S.7261W, S.7266W, S.7262W and S.7267W.



### S.5506



4 way connector for through wiring (in/out).  
 To install inside the bollard.

Minilook applique 220 mm




**S.7201W** □ Single emission

MID-POWER LEDs **3000K** CRI90 1090lm  
 Rated luminaire luminous flux 475lm  
 Rated input power 12,5W  
 220V-240V AC 50/60Hz / DC Not Dimmable

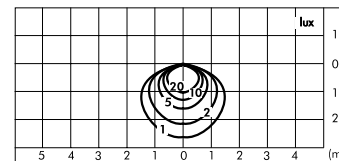



Minilook applique 220 mm




**S.7202W** □ Double emission

MID-POWER LEDs **3000K** CRI90 1090lm  
 Rated luminaire luminous flux 389lm  
 Rated input power 12,5W  
 220V-240V AC 50/60Hz / DC Not Dimmable

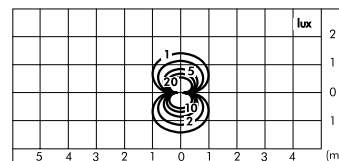



# LOOK Applique 290 mm

Look applique 290 mm




**S.7250W** □ Single emission

MID-POWER LEDs **3000K** CRI90 1860lm  
 Rated luminaire luminous flux 888lm  
 Rated input power 19W  
 220V-240V AC 50/60Hz / DC Not Dimmable

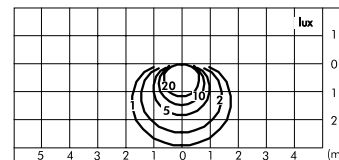



Look applique 290 mm





**S.7252W** □ Double emission

MID-POWER LEDs **3000K** CRI90 1860lm  
 Rated luminaire luminous flux 723lm  
 Rated input power 19W  
 220V-240V AC 50/60Hz / DC Not Dimmable

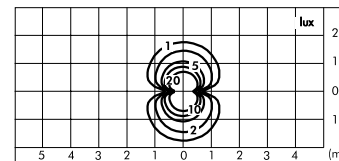


## Microlook bollard H 220 mm





### S.7212W Single emission

MID-POWER LEDs **3000K** CR180 800lm  
 Rated luminaire luminous flux 244lm  
 Rated input power 4,2W  
 220V-240V AC 50/60Hz / DC Not Dimmable

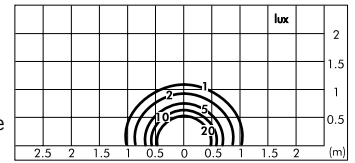


## Microlook bollard H 450 mm





### S.7213W Single emission

MID-POWER LEDs **3000K** CR180 800lm  
 Rated luminaire luminous flux 244lm  
 Rated input power 4,2W  
 220V-240V AC 50/60Hz / DC Not Dimmable

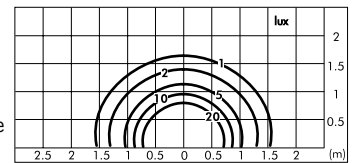



# MINILOOK Bollard 220 mm

## Minilook bollard H 220 mm




### S.7206W Single emission

MID-POWER LEDs **3000K** CR190 970lm  
 Rated luminaire luminous flux 334lm  
 Rated input power 12,5W  
 220V-240V AC 50/60Hz / DC Not Dimmable


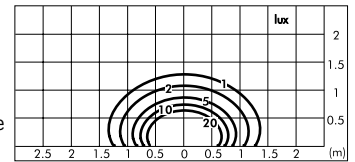


### S.7215W Double emission

MID-POWER LEDs **3000K** CR190 1940lm  
 Rated luminaire luminous flux 646lm  
 Rated input power 21,5W  
 220V-240V AC 50/60Hz / DC Not Dimmable


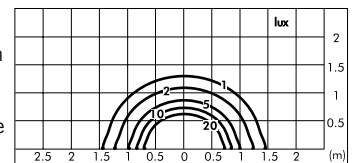


## Minilook bollard H 580 mm




### S.7211W Single emission

MID-POWER LEDs **3000K** CR190 970lm  
 Rated luminaire luminous flux 334lm  
 Rated input power 12,5W  
 220V-240V AC 50/60Hz / DC Not Dimmable


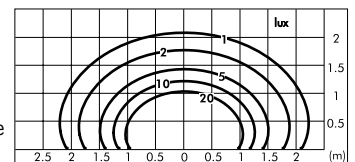


### S.7220W Double emission

MID-POWER LEDs **3000K** CR190 1940lm  
 Rated luminaire luminous flux 646lm  
 Rated input power 21,5W  
 220V-240V AC 50/60Hz / DC Not Dimmable


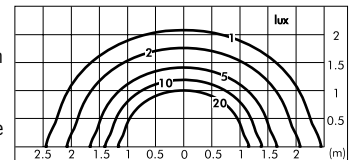


## Look bollard H 290 mm

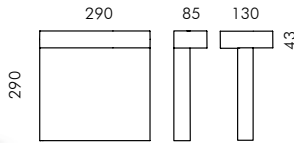


### S.7260W Single emission

MID-POWER LEDs **3000K** CRI90 1860lm  
 Rated luminaire luminous flux 937lm  
 Rated input power 24W  
 220V-240V AC 50/60Hz / DC Not Dimmable


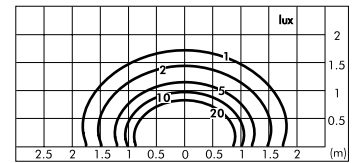


### S.7265W Double emission

MID-POWER LEDs **3000K** CRI90 3720lm  
 Rated luminaire luminous flux 1858lm  
 Rated input power 48W  
 220V-240V AC 50/60Hz / DC Not Dimmable


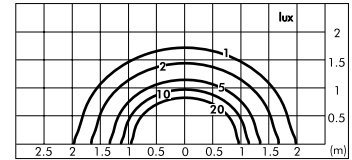


## Look bollard H 580 mm

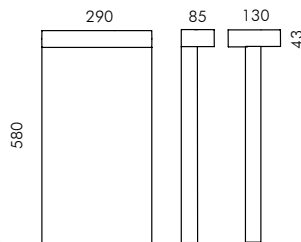


### S.7261W Single emission

MID-POWER LEDs **3000K** CRI90 1860lm  
 Rated luminaire luminous flux 937lm  
 Rated input power 24W  
 220V-240V AC 50/60Hz / DC Not Dimmable


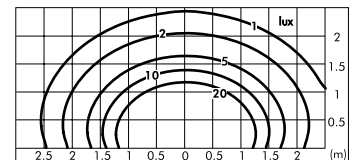


### S.7266W Double emission

MID-POWER LEDs **3000K** CRI90 3720lm  
 Rated luminaire luminous flux 1858lm  
 Rated input power 48W  
 220V-240V AC 50/60Hz / DC Not Dimmable


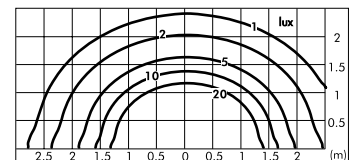


## Look bollard H 870 mm

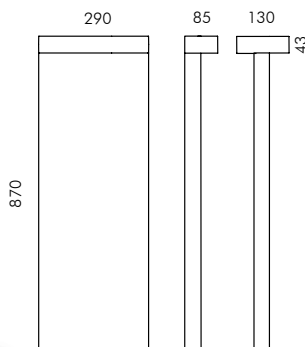


### S.7262W Single emission

MID-POWER LEDs **3000K** CRI90 1860lm  
 Rated luminaire luminous flux 937lm  
 Rated input power 24W  
 220V-240V AC 50/60Hz / DC Not Dimmable

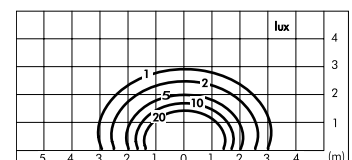

### S.7267W Double emission

MID-POWER LEDs **3000K** CRI90 3720lm  
 Rated luminaire luminous flux 1858lm  
 Rated input power 48W  
 220V-240V AC 50/60Hz / DC Not Dimmable

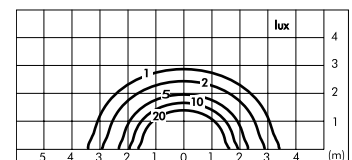



# UNIQUUM ADVOCATEN



Unicum Advocaten, Kortrijk, Belgium - Klaré architecten © Annick Vermimmen