

MARKER





Die-cast EN AB-47100 aluminium housing (copper free) with high corrosion resistance.
 Toughened glass diffuser.
 Stainless steel screws.
 Supplied with double cable entry.
 Silicone gaskets.

Double powdered paint in 3 step process:

- _ surface treatment containing ceramic nano particles (Bonderite);
- _ epoxy primer paint;
- _ polyester powder paint with high resistance against UV rays and harsh weather conditions.

Luminaires supplied with LED circuit.

IP65

CLASS I ⊕

IK 10




COLOURS:

- Aluminium grey (code 14)

This luminaire contains built-in LED modules with energy class:

A **A+** **A++**


The LED modules cannot be changed in the luminaire (Regulation UE 874/2012).

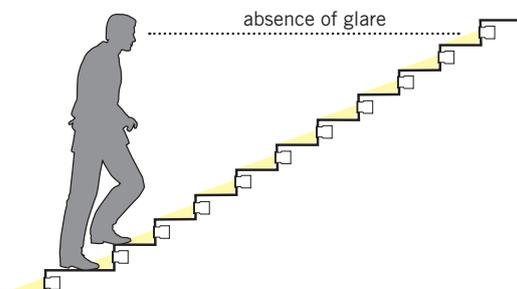

MARKER is a product conceived to be recessed in the riser of the steps.
 The light is controlled and oriented downward to avoid glare even when the position of the lighting fitting is higher than the height of the point of view.

MARKER

Step riser recessed



S.6325W



With leds white 3000K 588lm
Rated luminaire luminous flux 170lm (simulated)
Rated input power 8,3W 240V
Recessing box not included
Reinforced fixing system with screws.



S.6329

RECESSING BOX
for MARKER
310 x 79mm
Depth 86mm

