


## ACCESSORY

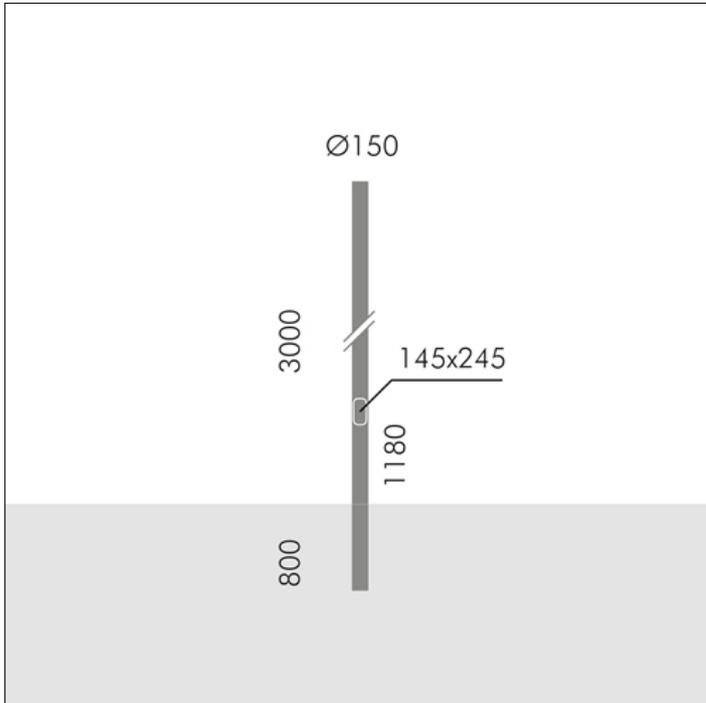

### S.1485 H 3,0m Ø150mm CYLINDRICAL POLE WITH BASE

Cylindrical shaped poles consisting of: straight circular section shaft, Ø 150mm, 3mm in thickness, total length 3,80m , single section built by using longitudinally welded tubes by induction welding (ERW) UNI EN 10219-2-ISO 4200

Suitable for ground recessed installation to a cement base 0,80m:  
Suggested reinforced concrete footstall dimension 1,0m x 1,0m h 1,0m. Footstall dimension can be calculated according to your country norms and ground properties.

The grade of steel used is S235JR (Fe360B) with material characteristics as per normative UNI EN 10025;

The surface protection treatment is done through hot dip galvanization.

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1500h.

Note: With the H.3000 mm pole, up to 5 additional Heads can be installed. It is possible to install the Shift Pro rotosymmetric Triple Head. In this case, up to 4 Heads can be installed.

#### WE RECOMMEND THE USE OF THE FOLLOWING ACCESSORIES :

##### S.2009 PLANTED ROOT for CYLINDRICAL POLE

##### S.2899 POLE BASE COVER

Accessory available in the following colors: Black (cod.09), Anthracite grey (cod.24)