
ACCESSORY

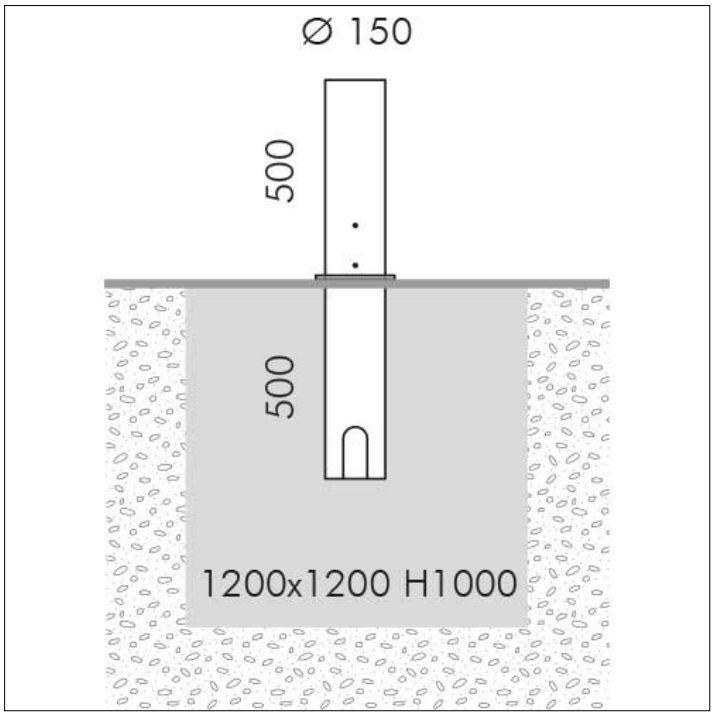

S.4219
FLANGE FOR SAFETY BOLLARD

Resistant to vehicle impact of 3500Kg up to max speed of 50km/h. Steel flange h 500mm to be cemented in ground. Rooted 500mm into reinforced concrete plinth 1200x1200x1000mm (the flange must be welded to the plinth's rebar).

Exclusive distributor for USA
Sistemalux Inc. - 9320 Saint Laurent, Montréal (Qc) - Canada QC H2N 1N7 - Tel.: +1 (514) 523-1339

The present technical data sheet and all the information contained is property of SIMES S.p.A. All rights reserved.
We reserve the right to change specifications without prior written notice.