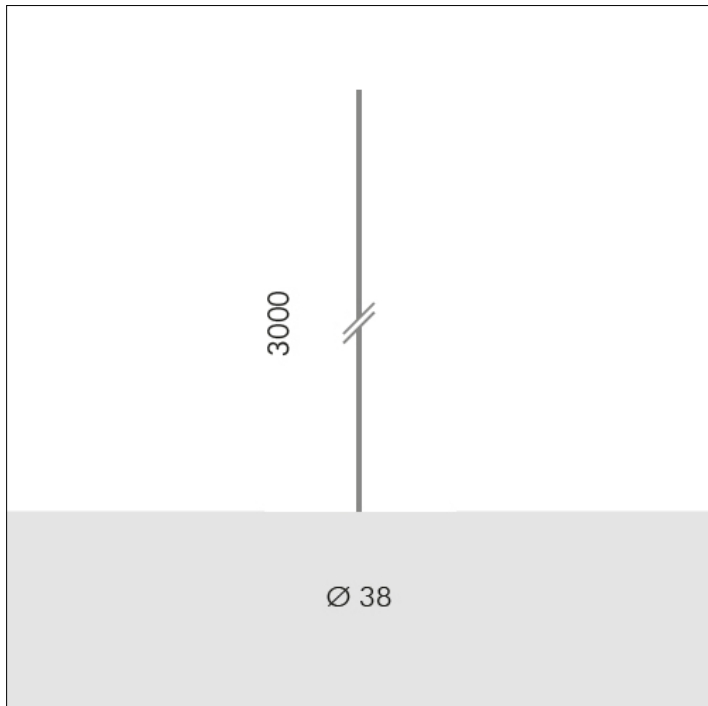


## ZUBEHÖRTEIL

**S.2805****ZYLINDRISCHER MAST H 3,0m Ø38mm**

Cylindrical shaped poles consisting of: straight circular section shaft, Ø 38mm, 4mm in thickness, total length 3,00m, in aluminium EN AW6060.

Suitable for ground recessed installation to a cement base 0,50m ( Accessory S.2806 ) : Suggested reinforced concrete footstall dimension 1,0m x 1,0m h 0,7m. Footstall dimension can be calculated according to your country norms and ground properties.

The surface protection treatment is done through hot dip galvanization.

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1500h.

Für eine korrekte Installation des S.2805-Masts wird dringend empfohlen, das Flanschzubehör S.2806 zu vergraben  
Zubehör in folgenden Farben erhältlich: Dunkelgrün (cod.07), Bronze (cod.20), Anthrazitgrau (cod.24)