

5CENTO Step light (surface mounted)

SIMES



5CENTO

5cento is a highly versatile step light, with limited dimensions and a slim design that can be installed in plasterboard or brickwork. It can be fixed to the traditional electrical junction box and house the driver directly in it, or it can be installed surface mounted. With only 22mm of protrusion, 5cento has been developed without visible screws that are totally concealed by a magnetic plate that fits perfectly onto the body of the luminaire. Available in different dimensions, 5cento has been conceived with a modular installation system, so that the larger version can be installed on the smaller electrical junction boxes. 5cento is particularly suitable for residential applications and represents a very user friendly installation system on all the various european standard electrical box.

TECHNICAL DESCRIPTION

Die-cast aluminium housing with high corrosion resistance. Toughened glass diffuser. Not visible stainless steel A4 screws. Luminaire supplied with 0,5m bipolar flat cable. Silicone gaskets. Double powder paint.

Require constant voltage 24Vdc remote power supply.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS III ⚡

MECHANICAL RESISTANCE
IK 07

COLOUR:

.01 White



.14 Aluminium Grey

.24 Anthracite Grey




www.simes.it/5cento

Square





S.2200W
LED MODULE **3000K** CRI90 263lm 1,9W
(on request 2700K CRI90 242lm)
(on request 4000K CRI80 327lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)




Can be mounted onto the recessed junction box
Italian, French, English and German versions for plasterboard or masonry

Rectangular



S.2210W
LED MODULE **3000K** CRI90 438lm 3,1W
(on request 2700K CRI90 403lm)
(on request 4000K CRI80 544lm)
24Vdc PWM



Requires constant voltage 24Vdc
remote power supply (page 522-523)



Can be mounted onto the rectangular recessed junction box
Italian, French, English and German versions for plasterboard or masonry


The electrical junction box can house
the driver accessory **S.2407** to drive the fixture.

Rectangular long

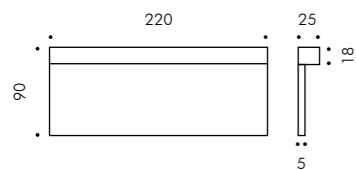

S.2220W
LED MODULE **3000K** CRI90 700lm 5W
(on request 2700K CRI90 644lm)
(on request 4000K CRI80 896lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)



Can be mounted onto the rectangular recessed junction box
Italian, French, English and German versions for plasterboard or masonry

The electrical junction box can house
the driver accessory **S.2407** to drive the fixture.



Private villa, Vicenza, Italy - Yakisugi design © DD Store