

BELL

The elegance of the Bell family is told by an harmonious merge of colours and materials. The product differenciates itself for the shape of the aluminum body enriched by solid bronze inserts characterizing the whole family in a distinctive way. The cone reflector that embraces the inner part of the fitting warms the light beam and the neck slims the silhouette. These decorative elements in solid bronze are treated with a transparent protective layer that maintains the color and ensures quality and durability.

TECHNICAL DESCRIPTION

Die-cast aluminium, extruded aluminium structure (bollard version) with high corrosion resistance. Satin bronze neck and cone reflector. Stainless steel A4 screws. Toughened glass diffuser 4mm thick. Prewired luminaire with neoprene H05RN-F cable and connector. Silicone gaskets. Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS IP65

ISOLATION CLASS CLASS I 🚇

MECHANICAL RESISTANCE

COLOURS AND FINISHING



White (cone reflector and neck in solid satin bronze)




Burnished Bronze (cone reflector and neck in solid satin bronze)




MINIBELL SIMES

Applique









S.8000W

LED MODULE **3000K** CRI90 1250Im 8,9W (on request 2700K CRI90 1150Im) (on request 4000K CRI80 1552Im) 220V-240Vac 50/60Hz ON/OFF Not Dimmable Supplied with cable 1,5m

Bollard H 700 mm








S.8005W


LED MODULE 3000K CRI90 1250Im 8,9W (on request 2700K CRI90 1150Im) (on request 4000K CRI80 1552Im) 220V-240Vac 50/60Hz ON/OFF Not Dimmable Supplied with cable 4,0m

Flange to be fixed in concrete included

Bollard H 900 mm



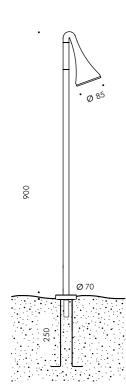



S.8006W

LED MODULE 3000K CRI90 1250Im 8,9W (on request 2700K CRI90 1150Im) (on request 4000K CRI80 1552Im) 220V-240Vac 50/60Hz ON/OFF Not Dimmable Supplied with cable 4,0m

Flange to be fixed in concrete included



SIMES BELL

Applique







S.8020W

LED MODULE **3000K** CRI90 2500Im 17,7W (on request 2700K CRI90 2300Im) (on request 4000K CRI80 3105Im) 220V-240Vac 50/60Hz ON/OFF Not Dimmable Supplied with cable 1,5m

Ceiling









LED MODULE **3000K** CRI90 2500Im 17,7W (on request 2700K CRI90 2300Im) (on request 4000K CRI80 3105Im) 220V-240Vac 50/60Hz

Phase-cut dimmer
Supplied with cable 1,5m

Suspension







LED MODULE **3000K** CRI90 2500Im 17,7W (on request 2700K CRI90 2300Im) (on request 4000K CRI80 3105Im) 220V-240Vac 50/60Hz **Phase-cut dimmer**Supplied with cable 4,0m

