





Blinker

Wall recessed and bollard

With a clear personality, BLINKER is an elegant wall recess fitting, ideal for discrete illumination of walkways, passages and stairs. Completely flush with the wall, with no visible screws and glare-free light beams it offers visual comfort, creating a cosy and welcoming atmosphere.

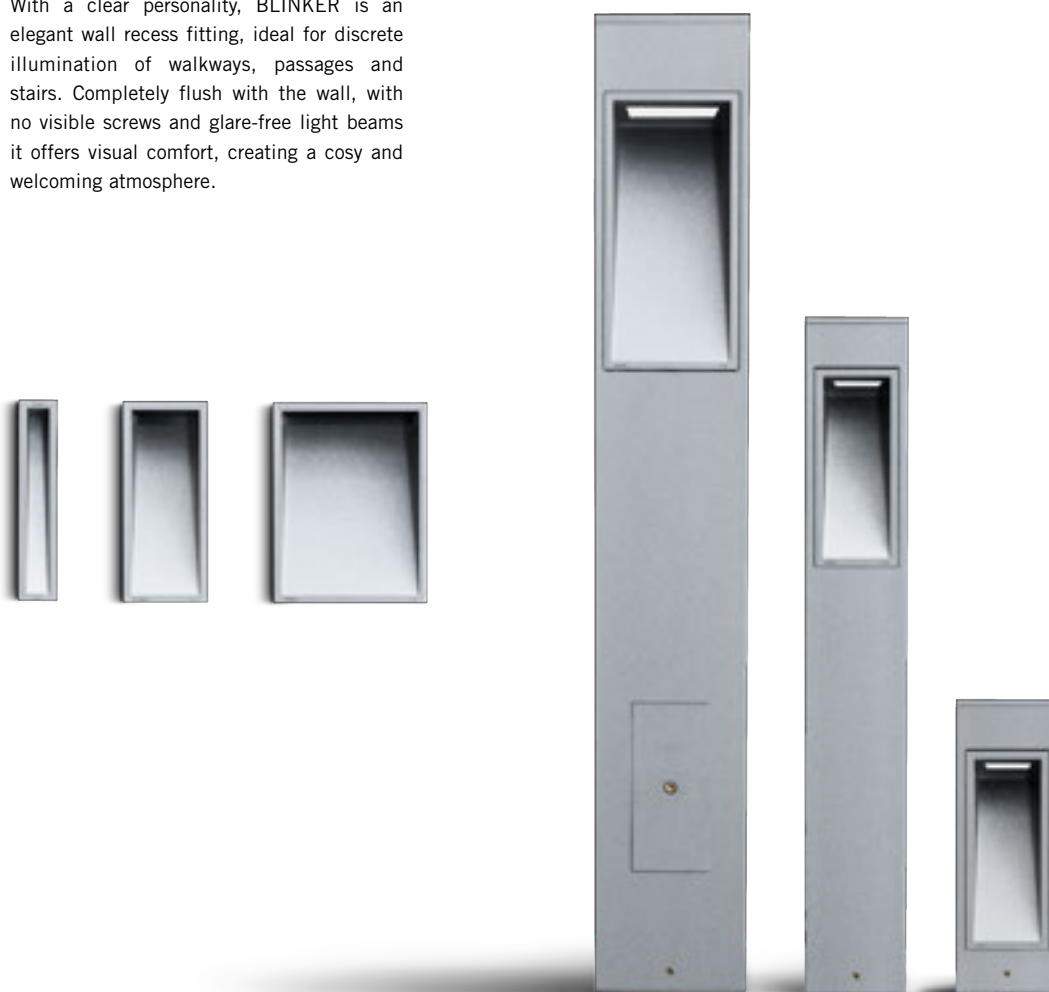



The Blue Planet Building Foundation, Kastrup, Denmark - Arch. 3XN © ph. Tom Jersø

BLINKER Wall recessed and bollard

Die-cast EN AB-47100 aluminium housing, extruded EN AW-6060 aluminium structure (bollard version) with high corrosion resistance. Stainless steel screws. Spring lock system for a total absence of visible screws. Acid-etched glass diffuser. Luminaire with one single cable entry and grommet (Wall recessed). Pre-wired luminaire with neoprene cable and connector (Bollard). Silicone gaskets.
Double powder paint.

Protection class
IP65

Isolation class
CLASS I ⊕


Mechanical resistance
IK 06

Leds 4000K CRI90 versions are available on request.



S.5506

4 way connector for through wiring (in/out). To install inside the bollard H800mm or H1150mm.



MASK FOR PLASTER BOARD WALLS available on request.


Colours:

○ Aluminium grey (code 14)

For the latest technical information and luminaire updates with LED technology please refer to www.simes.it



REGISTERED DESIGN

Microblinker



S.6060W


1 MID-POWER LED **3000K** CRI90 379lm
 Rated luminaire luminous flux 30lm
 Rated input power 4,8W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Recessing box not included



S.6063



RECESSING BOX
 for MICROBLINKER
 70 x 300 mm
 Depth 105 mm

Blinker



S.6080W


1 COB LED **3000K** CRI90 2419lm
 Rated luminaire luminous flux 567lm
 Rated input power 22W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Recessing box not included

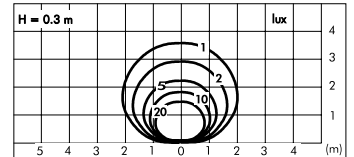

S.6083



RECESSING BOX
 for BLINKER
 190 x 300 mm
 Depth 130 mm

Miniblinker



S.6070W


1 COB LED **3000K** CRI90 1565lm
 Rated luminaire luminous flux 281lm
 Rated input power 16,5W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Recessing box not included

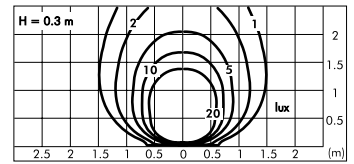

S.6073



RECESSING BOX
 for MINIBLINKER
 110 x 300 mm
 Depth 130 mm

Miniblinker bollard H 350 mm




S.6050W

1 COB LED **3000K** CRI90 1565lm
 Rated luminaire luminous flux 281lm
 Rated input power 16,5W
 220V-240V AC 50/60Hz / DC Not Dimmable


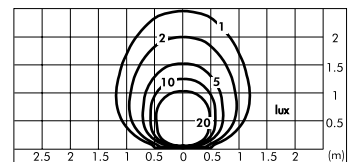


Miniblinker bollard H 800 mm




S.6090W

1 COB LED **3000K** CRI90 1565lm
 Rated luminaire luminous flux 281lm
 Rated input power 16,5W
 220V-240V AC 50/60Hz / DC Not Dimmable

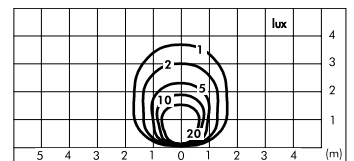



S.6309
FLANGE FOR MINIBLINKER BOLLARD
 Ø 120 mm flange to be fixed in concrete
 with stainless steel screws for fixing in the
 ground.

Megablinker



S.6020W


1 COB LED **3000K** CRI90 3763lm
 Rated luminaire luminous flux 759lm
 Rated input power 34,4W
 220V-240V AC 50/60Hz Not Dimmable
 Recessing box not included

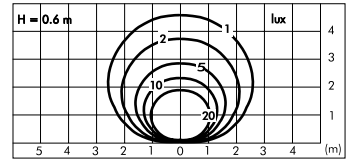

S.6023



RECESSING BOX
 for MEGABLINKER
 187 x 433 mm
 Depth 170 mm

Megablinker bollard H 1150 mm



S.6040W

1 COB LED **3000K** CRI90 3763lm
 Rated luminaire luminous flux 759lm
 Rated input power 34,4W
 220V-240V AC 50/60Hz Not Dimmable

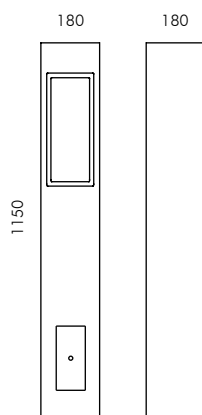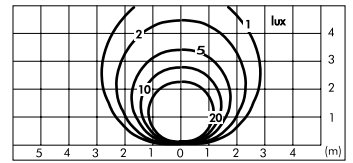

S.5310

FLANGE FOR MEGABLINKER BOLLARD
 Ø 180 mm flange to be fixed in concrete
 with stainless steel screws for fixing in
 the ground.