


BLINKER Bollard and step light (wall recessed)

SIMES

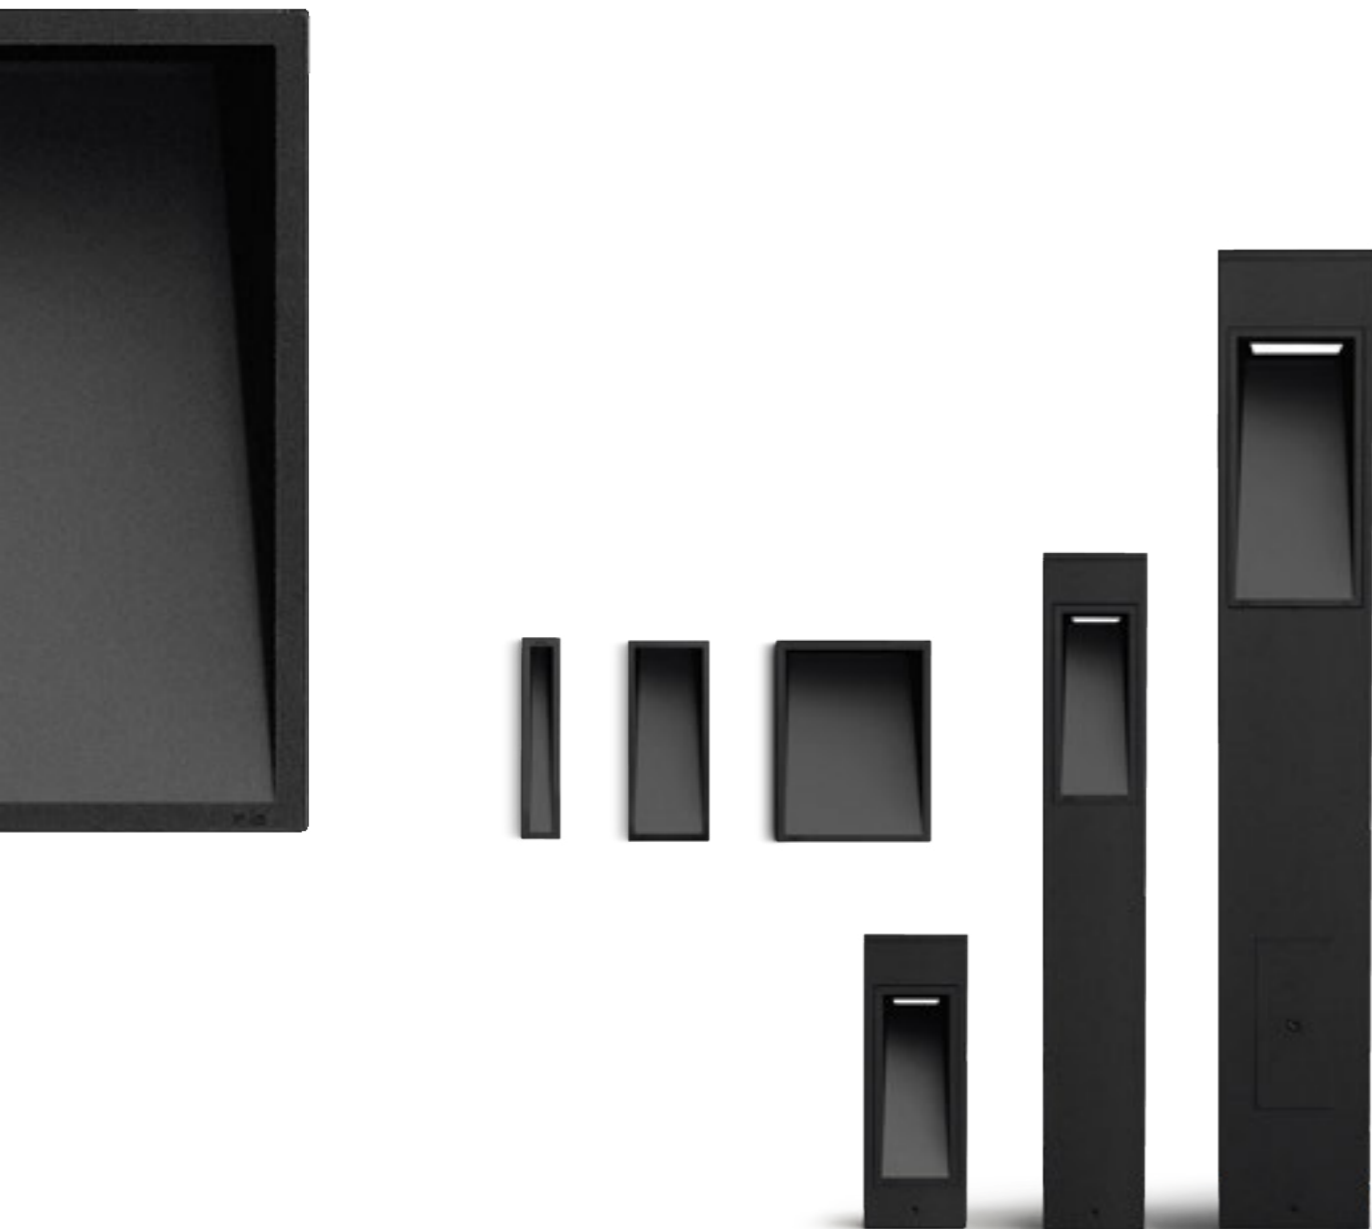

BLINKER

A clean and minimal design characterizes this elegant wall recessed created for discretely and comfortably illuminate outdoor areas, staircases, walkways. The perfect coplanarity of the luminaire with the wall and its light beams, homogeneous and glare-free, offer great visual comfort and create evocative atmospheres.

TECHNICAL DESCRIPTION

Die-cast aluminium housing, extruded aluminium structure (bollard version) with high corrosion resistance. Stainless steel A4 screws. Acid-etched glass diffuser. Silicone gaskets. Double powder paint.

WALL RECESSED

Spring lock system for a total absence of visible screws. Luminaire with one single cable entry and grommet.

BOLLARD

Luminaire supplied with neoprene H05RN-F cable.

REGISTERED DESIGN

PROTECTION CLASS IP65

ISOLATION CLASS

CLASS I ⊕
CLASS II ⊞ MEGABLINKER BOLLARD

MECHANICAL RESISTANCE

IK 06

COLOURS


.09 Black

.14 Aluminium Grey




www.simes.it/blinker

Microblinker




S.6060W
LED MODULE **3000K** CRI90 193lm 1,5W
(on request 2700K CRI90 178lm)
(on request 4000K CRI80 238lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included




S.6063
RECESSING BOX
for MICROBLINKER
70 x 300mm
Depth 105mm

Miniblinker




S.6070W
LED MODULE **3000K** CRI90 1828lm 13,6W
(on request 2700K CRI90 1738lm)
(on request 4000K CRI80 2241lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Recessing box not included




S.6073
RECESSING BOX
for MINIBLINKER
110 x 300mm
Depth 130mm

Blinker




S.6080W
LED MODULE **3000K** CRI90 2854lm 20,8W
(on request 2700K CRI90 2713lm)
(on request 4000K CRI80 3498lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
Recessing box not included




S.6083
RECESSING BOX
for BLINKER
190 x 300mm
Depth 130mm


Miniblinker bollard H 350mm




S.6050W
LED MODULE **3000K** CRI90 1828lm 13,6W
(on request 2700K CRI90 1738lm)
(on request 4000K CRI80 2241lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



Miniblinker bollard H 800mm





S.6090W
LED MODULE **3000K** CRI90 1828lm 13,6W
(on request 2700K CRI90 1738lm)
(on request 4000K CRI80 2241lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.6309
FLANGE FOR MINIBLINKER BOLLARD
Ø 120mm flange to be anchored in concrete

Megablinker




S.6020W
 LED MODULE **3000K** CRI90 4314lm 30W
 (on request 2700K CRI90 4101lm)
 (on request 4000K CRI80 5288lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
 Recessing box not included




S.6023
RECESSING BOX
for MEGABLINKER
 187 x 433mm
 Depth 170mm


Megablinker bollard H 1150mm



S.6040W
 LED MODULE **3000K** CRI90 4314lm 30W
 (on request 2700K CRI90 4101lm)
 (on request 4000K CRI80 5288lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

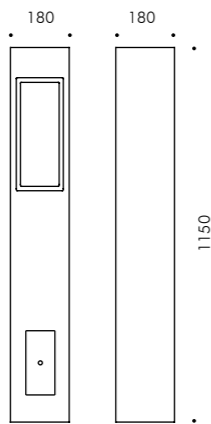

S.5310
FLANGE FOR MEGABLINKER BOLLARD
 Ø 180mm flange to be anchored in concrete

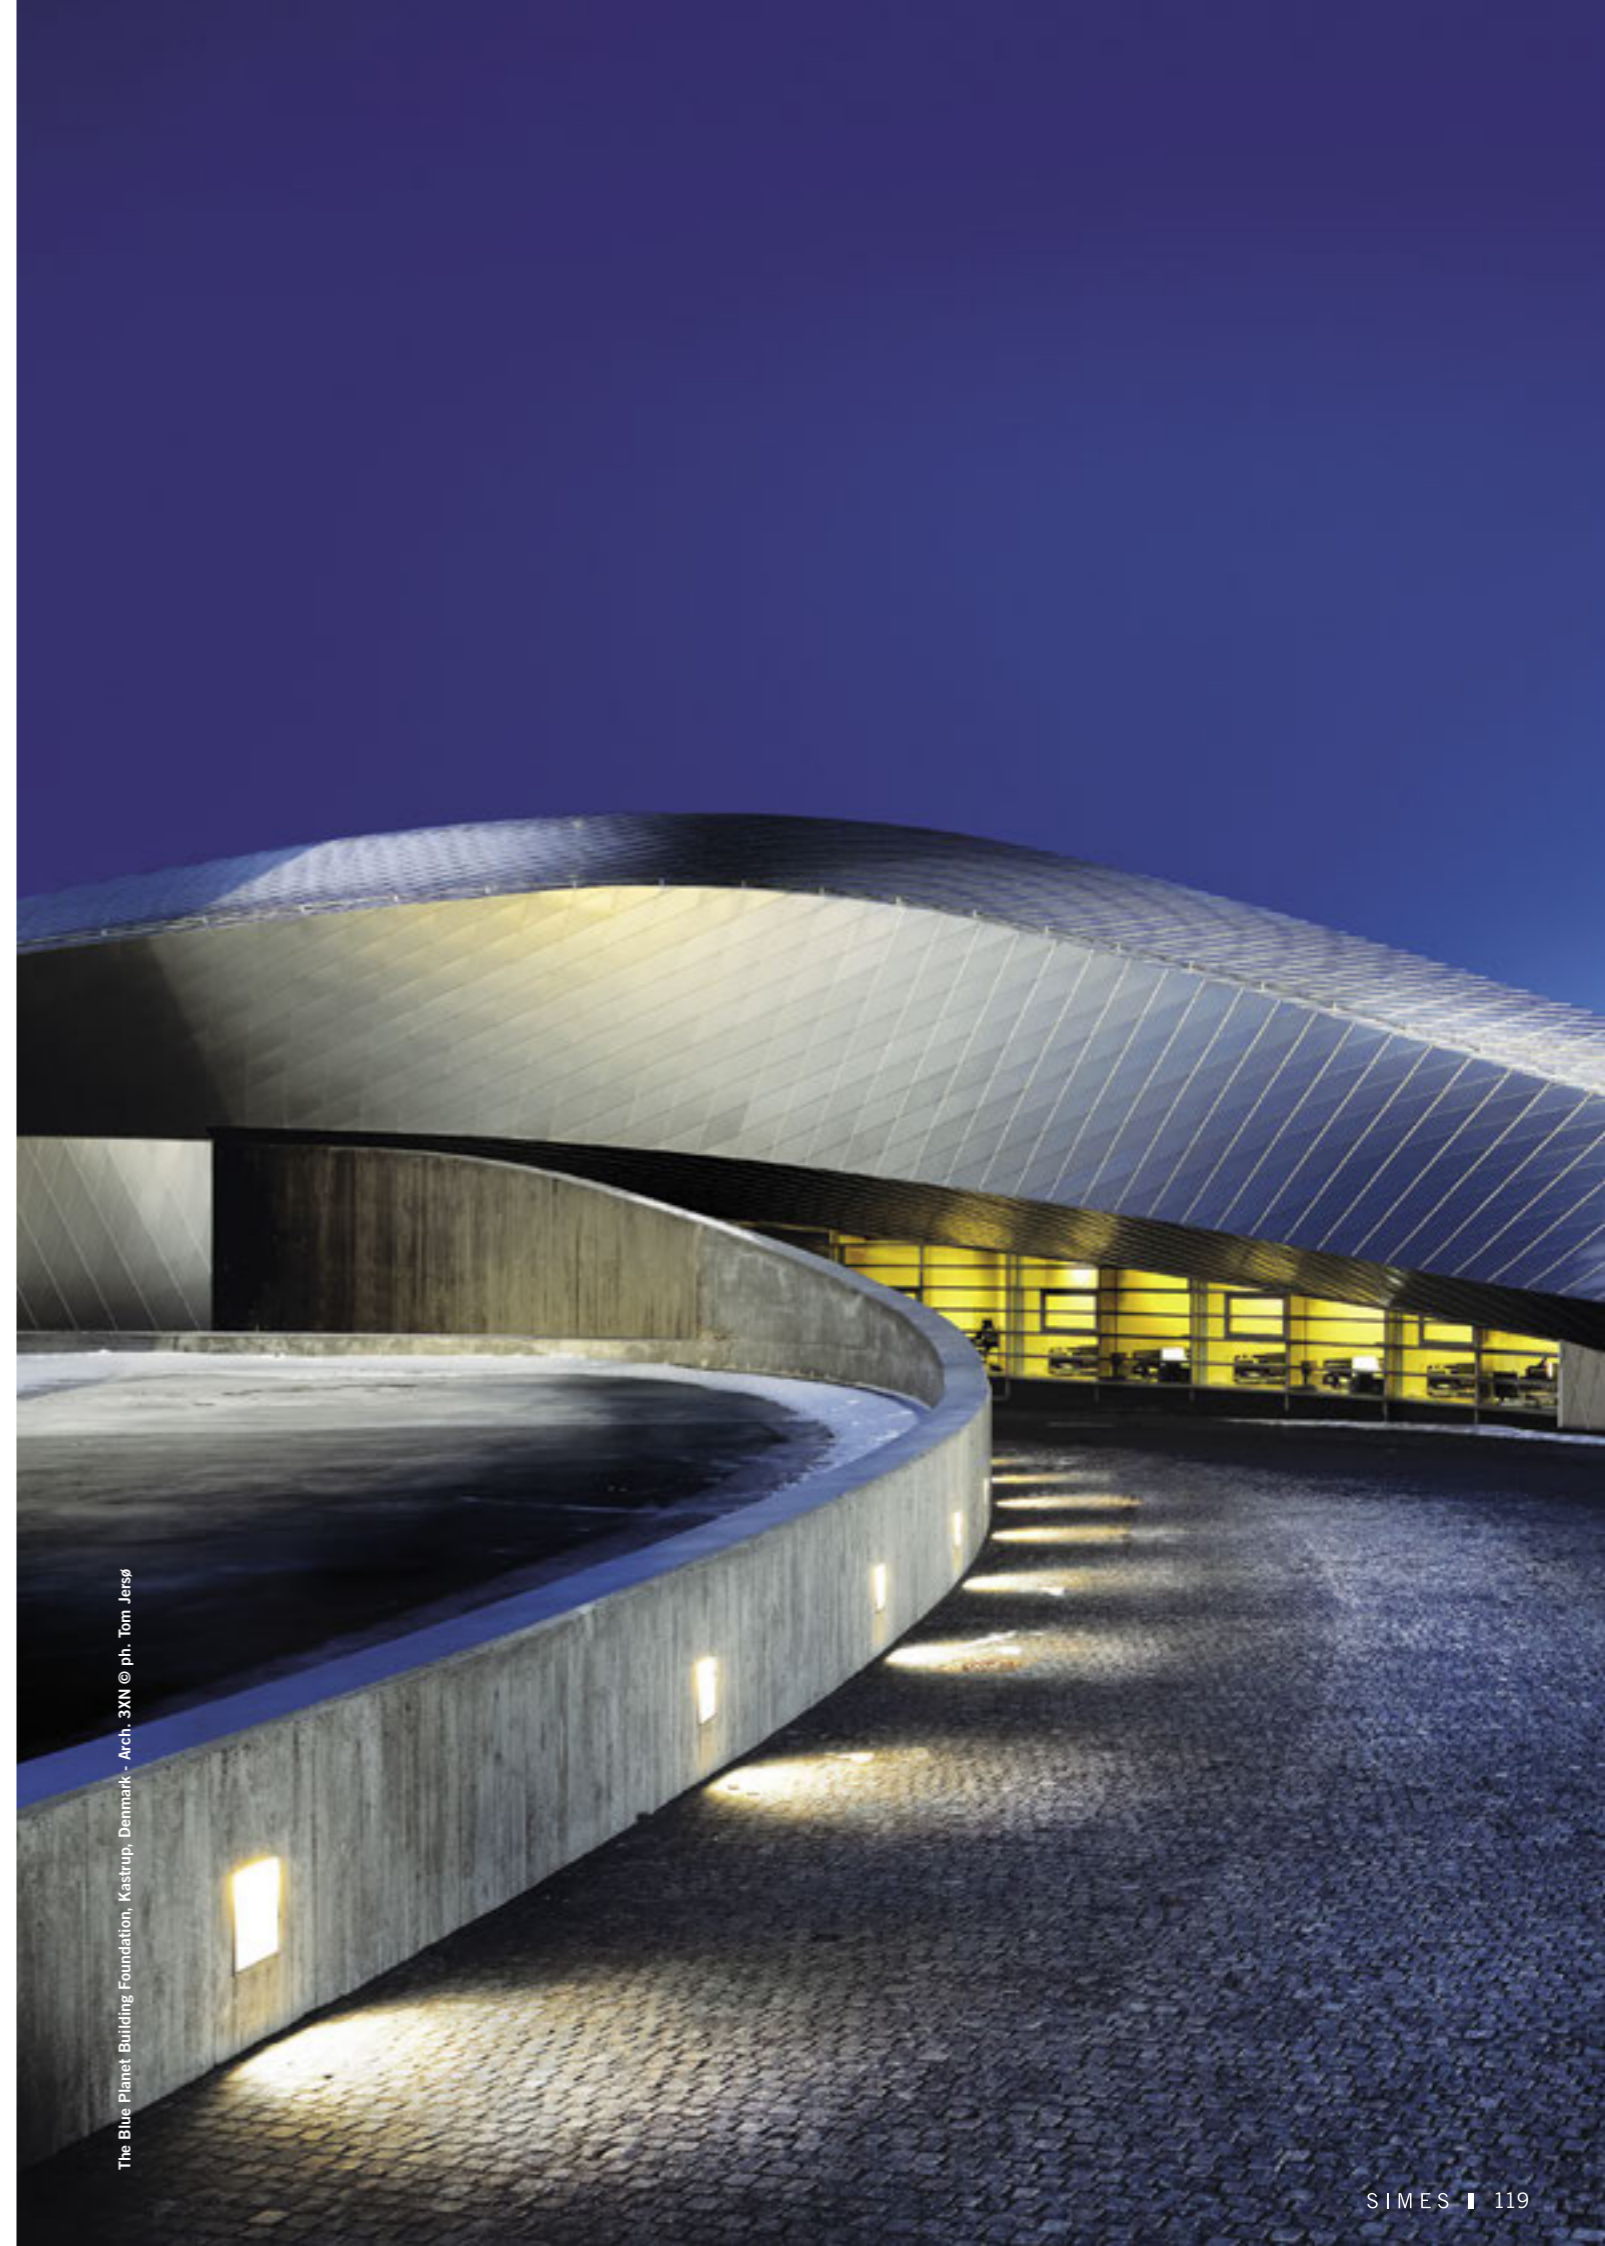

The Blue Planet Building Foundation, Kastrup, Denmark - Arch. 3XN © ph. Tom Jersø