





# Brique

## Wall recessed

BRIQUE is a wall recessed luminaire available in many shapes and in several dimensions either with grid or with front ring. It's classical design, the lighting performances and the low energy consumption, inscribe the BRIQUE family within the well-known and most used timeless fittings.





CheungGaeChon Cultural Hall, South Korea © Hwangduck Eng. Co. Ltd.

## BRIQUE Wall recessed

Die-cast EN AB-47100 aluminium housing with high corrosion resistance.  
Opal toughened glass diffuser.  
Stainless steel screws.  
Luminaire suitable for single grommet.  
Dutral gaskets.  
**Double powdered paint.**

### Protection class

IP54 MINIBRIQUE and MINIDIAPASON  
IP65 BRIQUE and MEGABRIQUE

### Isolation class

CLASS I ⊕

### Mechanical resistance of diffuser

IK 07 MINIBRIQUE and MINIDIAPASON  
IK 06 BRIQUE e MEGABRIQUE

### Lamp TC not included.



Leds 4000K CRI90 versions  
are available on request.

### Colour:

○ Aluminium grey (code 14)


*For the latest technical information  
and product updates with LED  
technology please refer to the official  
website ([www.simes.it](http://www.simes.it))*

## Minibrique rectangular with trim




### S.4552W

With leds white **3000K** CRI90 452lm  
 Rated luminaire luminous flux 125lm  
 Rated input power 6W 230V  
 Recessing box not included

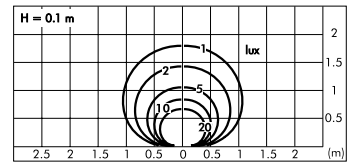

### S.4556



For lamp TC-S 7W 2G7 400lm  
 Rated luminaire luminous flux 100lm  
 Rated input power 8W 230V  
 Recessing box not included

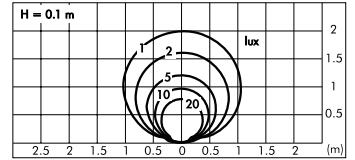

### S.4553


**RECESSING BOX** for MINIBRIQUE  
 184 x 74 mm Width 90 mm

## Brique rectangular with trim




### S.4511W

With leds white **3000K** CRI90 950lm  
 Rated luminaire luminous flux 356lm  
 Rated input power 10W 230V  
 Recessing box not included

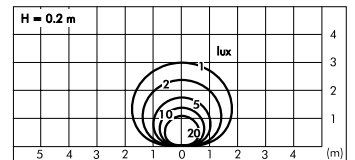

### S.4506



For lamp TC-DEL 18W G24q-2 1200lm  
 Rated luminaire luminous flux 312lm  
 Rated input power 22W 230V  
 Recessing box not included

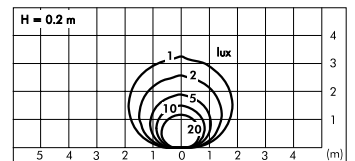

### S.4503


**RECESSING BOX** for BRIQUE  
 220 x 92 mm Width 95 mm

## Megabrique rectangular with trim




### S.4525W

With leds white **3000K** CRI90 1140lm  
 Rated luminaire luminous flux 581lm  
 Rated input power 17W 230V  
 Recessing box not included

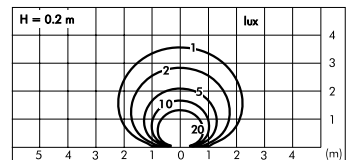

### S.4526



For lamp TC-DEL 26W G24q-3 1800lm  
 Rated luminaire luminous flux 504lm  
 Rated input power 31W 230V  
 Recessing box not included

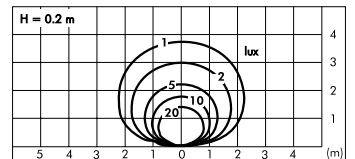

### S.4523


**RECESSING BOX** for MEGABRIQUE  
 263 x 135 mm Width 95 mm

## Minibrique rectangular with grille




### S.4551W

With leds white **3000K** CRI90 452lm  
 Rated luminaire luminous flux 34lm  
 Rated input power 6W 230V  
 Recessing box not included

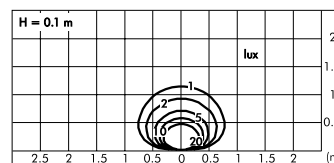

### S.4559



For lamp TC-S 7W 2G7 400lm  
 Rated luminaire luminous flux 20lm  
 Rated input power 8W 230V  
 Recessing box not included



### S.4553


**RECESSING BOX** for MINIBRIQUE  
 184 x 74 mm Width 90 mm

## Brique rectangular with grille




### S.4502W

With leds white **3000K** CRI90 950lm  
 Rated luminaire luminous flux 89lm  
 Rated input power 10W 230V  
 Recessing box not included

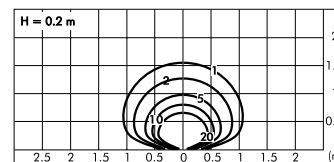

### S.4509



For lamp TC-DEL 18W G24q-2 1200lm  
 Rated luminaire luminous flux 84lm  
 Rated input power 22W 230V  
 Recessing box not included



### S.4503


**RECESSING BOX** for BRIQUE  
 220 x 92 mm Width 95 mm

## Megabrique rectangular with grille




### S.4521W

With leds white **3000K** CRI90 1140lm  
 Rated luminaire luminous flux 172lm  
 Rated input power 17W 230V  
 Recessing box not included

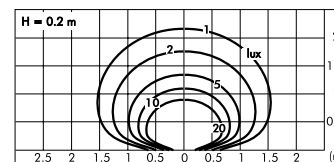

### S.4529


For lamp TC-DEL 26W G24q-3 1800lm  
 Rated luminaire luminous flux 126lm  
 Rated input power 31W 230V  
 Recessing box not included



### S.4523

**RECESSING BOX** for MEGABRIQUE  
 263 x 135 mm Width 95 mm




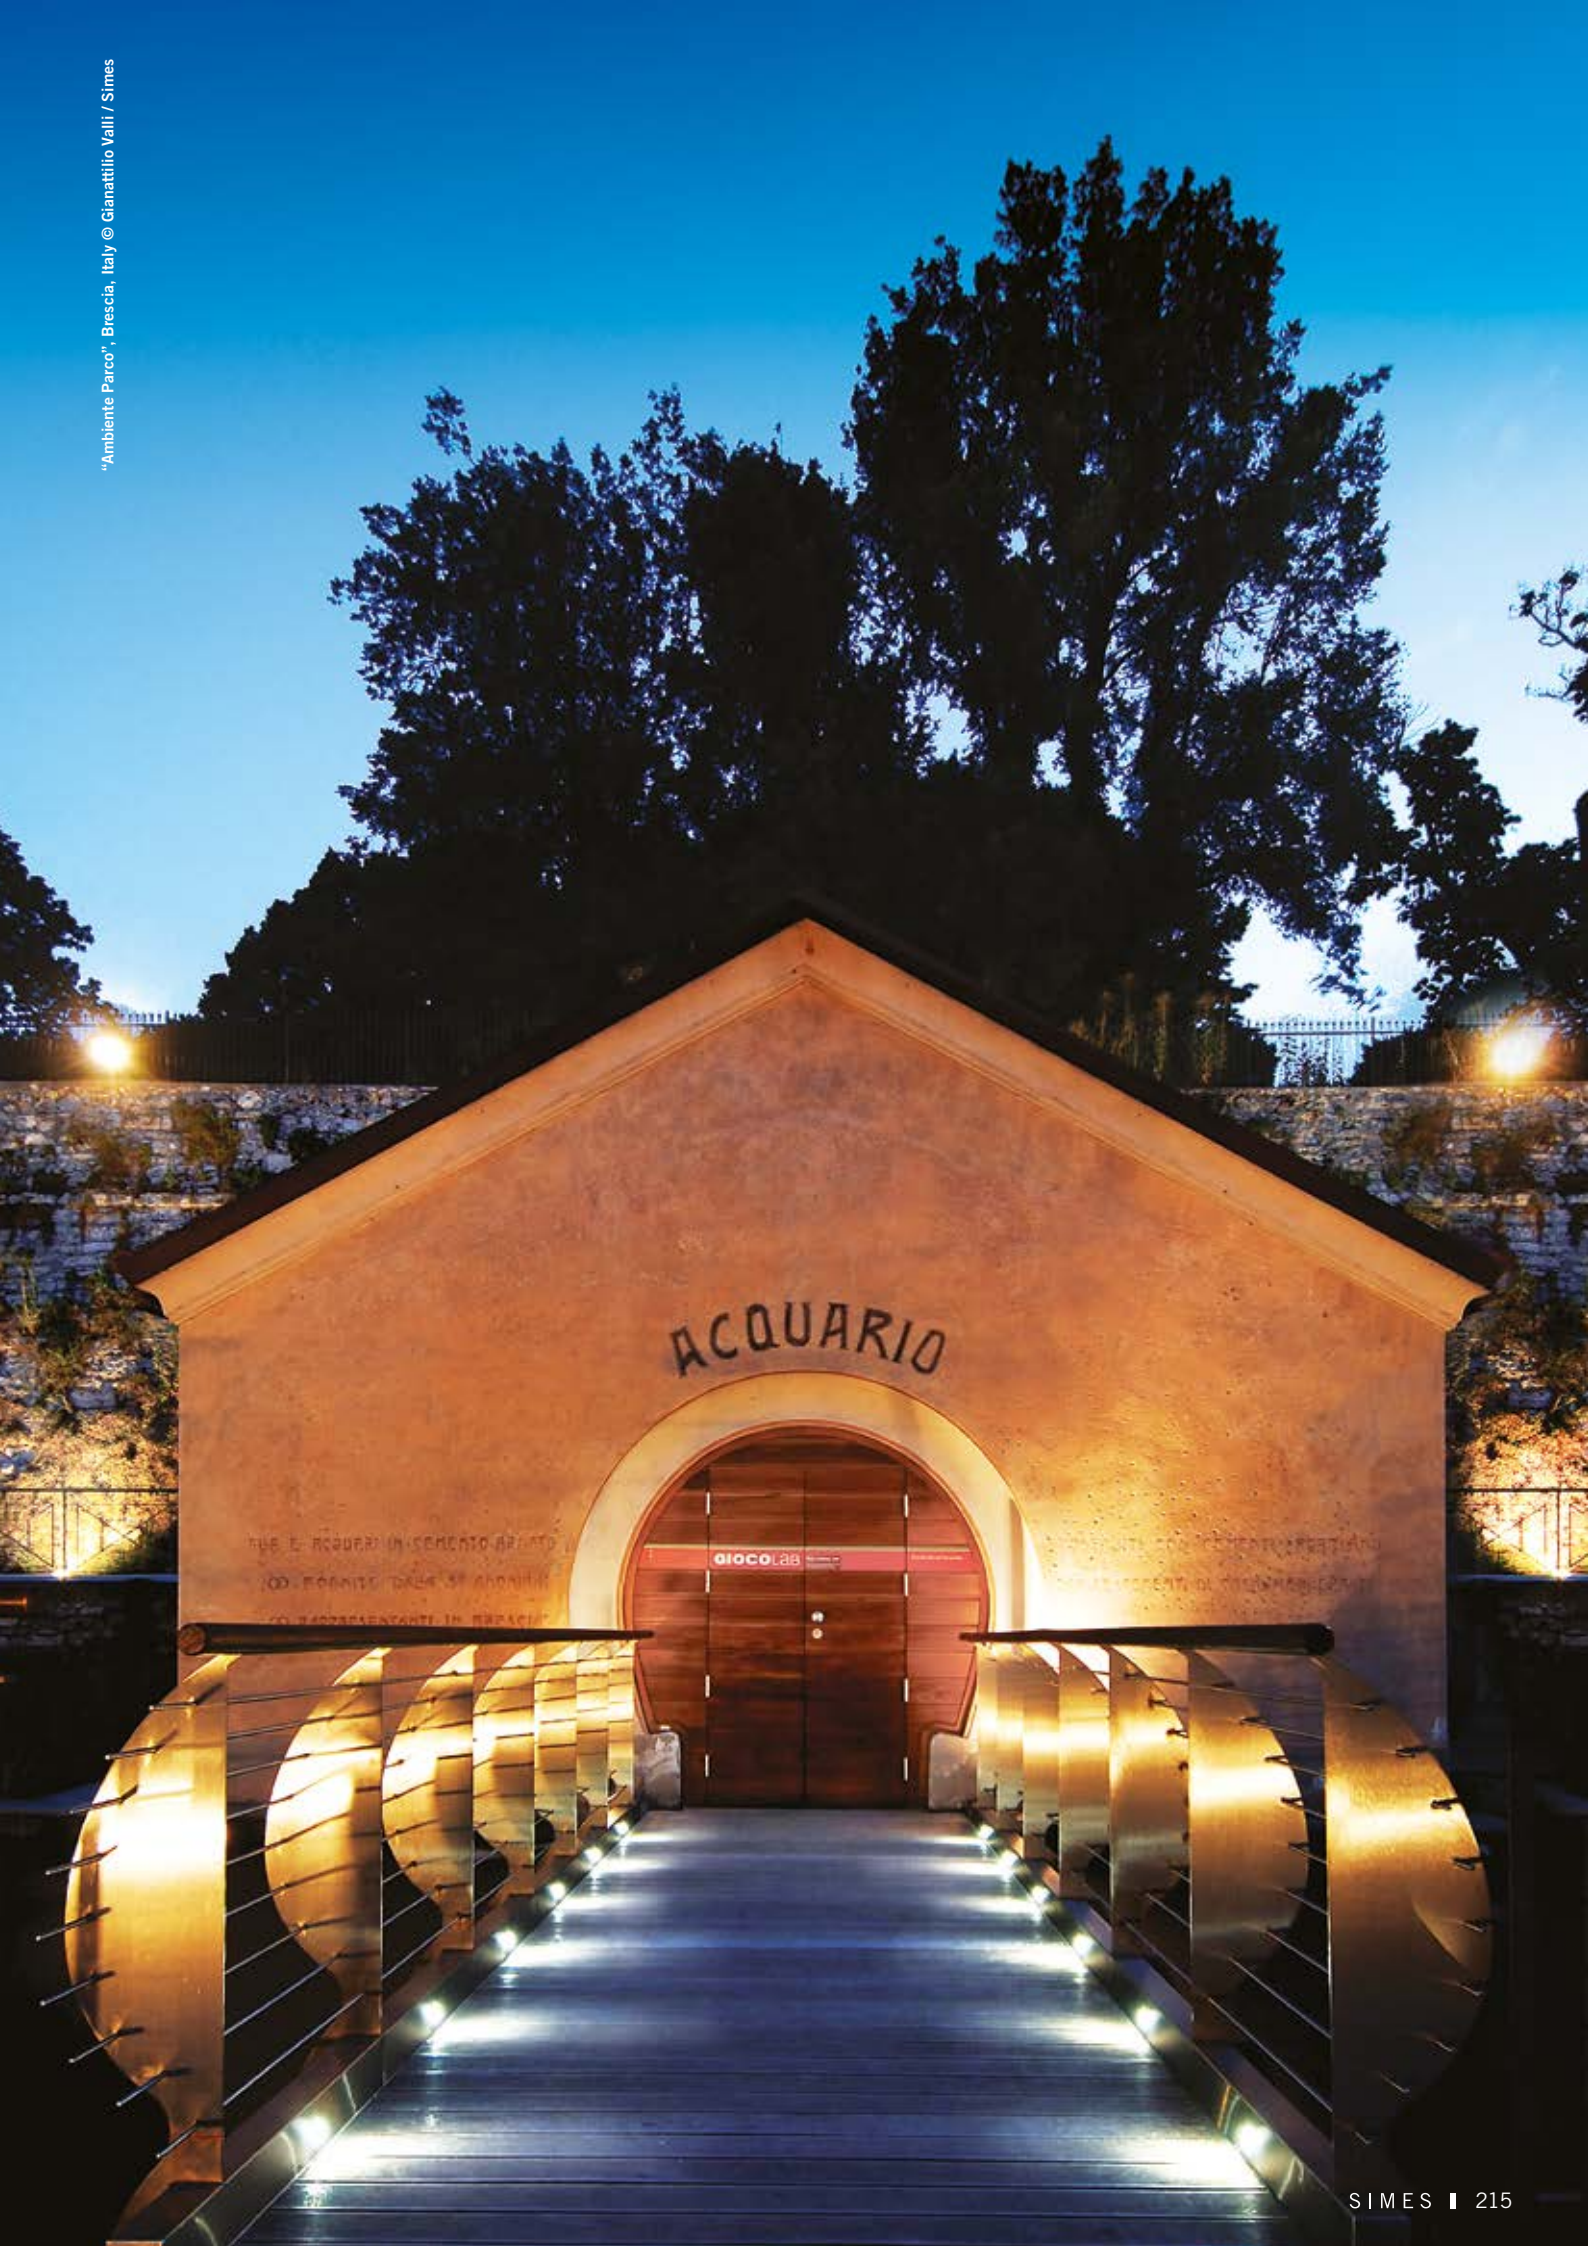


QUESTO È ACQUARIO IN CEMENTO ARMATO  
CON FORNITE DALE SP. ARLIN  
CON RACCOMENDANTI IN BRACCI

ACQUARIO È UN PRODOTTO  
DELLA SOCIETÀ DI INGEGNERIA  
E ARCHITETTURA


giocoLab

## Minibrique round with trim



### S.4533W


With leds white **3000K** CRI90 105lm  
 Rated luminaire luminous flux 35lm  
 Rated input power 2,4W 230V  
 Recessing box not included

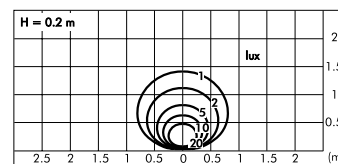

### S.4612


**RECESSING BOX** for  
 MINIBRIQUE ROUND  
 Ø 98 mm  
 Width 95 mm

## Minibrique round with grille



### S.4560W



With leds white **3000K** CRI90 105lm  
 Rated luminaire luminous flux 6lm  
 Rated input power 2,4W 230V  
 Recessing box not included

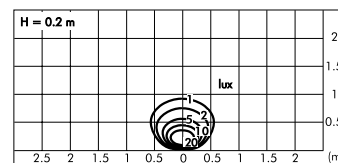

### S.4612


**RECESSING BOX** for  
 MINIBRIQUE ROUND  
 Ø 98 mm  
 Width 95 mm

## Minidiapason

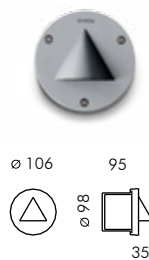

### S.4563W



With leds white **3000K** CRI90 105lm  
 Rated luminaire luminous flux 38lm  
 Rated input power 2,4W 230V  
 Recessing box not included




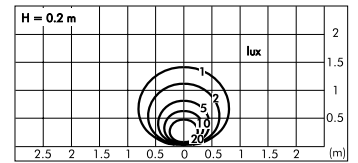
### S.4612

**RECESSING BOX** for  
 MINIDIAPASON ROUND  
 Ø 98 mm  
 Width 95 mm

### Minibrique square with trim


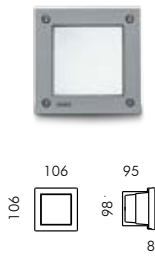



**S.4543W**   
 With leds white **3000K** CR190 105lm  
 Rated luminaire luminous flux 35lm  
 Rated input power 2,4W 230V  
 Recessing box not included




**S.4613**  
**RECESSING BOX** for  
 MINIBRIQUE SQUARE  
 98 x 98 mm  
 Width 95 mm

### Minibrique square with grille






**S.4561W**   
 With leds white **3000K** CR190 105lm  
 Rated luminaire luminous flux 6lm  
 Rated input power 2,4W 230V  
 Recessing box not included

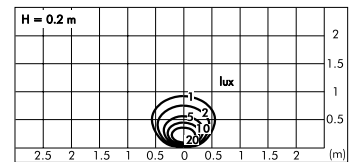


**S.4613**  
**RECESSING BOX** for  
 MINIBRIQUE SQUARE  
 98 x 98 mm  
 Width 95 mm

### Minidiapason

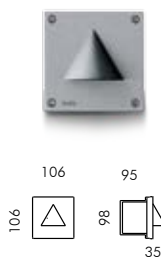

**S.4573W**   
 With leds white **3000K** CR190 105lm  
 Rated luminaire luminous flux 38lm  
 Rated input power 2,4W 230V  
 Recessing box not included

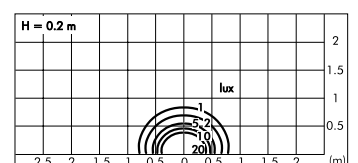

**S.4613**  
**RECESSING BOX** for  
 MINIDIAPASON SQUARE  
 98 x 98 mm  
 Width 95 mm