


Brique

Wall recessed

BRIQUE is a wall recessed luminaire available in many shapes and in several dimensions either with grid or with front ring. It's classical design, the lighting performances and the low energy consumption, inscribe the BRIQUE family within the well-known and most used timeless fittings.





CheungGaeChon Cultural Hall, South Korea © Hwangduck Eng. Co. Ltd.

BRIQUE Wall recessed

Die-cast EN AB-47100 aluminium housing with high corrosion resistance.
Opal toughened glass diffuser.
Stainless steel screws.
Luminaire with one single cable entry and grommet (Minibrique Square).
Luminaire with double cable entry and grommet (Minibrique, Brique and Megabrique Rectangular).
EPDM gaskets.
Double powder paint.

Protection class
IP54 Minibrique
IP65 Brique and Megabrique

Isolation class
CLASS I ⊕

Mechanical resistance
IK 07 Minibrique
IK 06 Brique and Megabrique



Leds 4000K CR190 versions
are available on request.

Colour:

○ Aluminium grey (code 14)


*For the latest technical information
and luminaire updates with LED
technology please refer to
www.simes.it*

Minibrique rectangular with trim



S.4552W



MID-POWER LEDs **3000K** CRI90 452lm
 Rated luminaire luminous flux 125lm
 Rated input power 6W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Recessing box not included

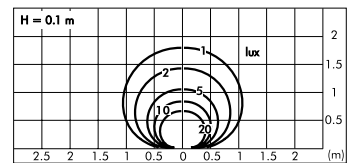

S.4553


RECESSING BOX for MINIBRIQUE
 184 x 74 mm Width 90 mm

Brique rectangular with trim



S.4511W



MID-POWER LEDs **3000K** CRI90 950lm
 Rated luminaire luminous flux 356lm
 Rated input power 10W
 220V-240V AC 50/60Hz Phase-cut dimmer
 Recessing box not included

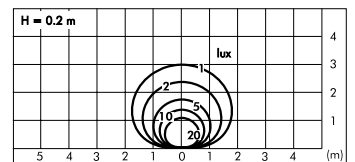

S.4503


RECESSING BOX for BRIQUE
 220 x 92 mm Width 95 mm

Megabrique rectangular with trim



S.4525W



MID-POWER LEDs **3000K** CRI90 1140lm
 Rated luminaire luminous flux 581lm
 Rated input power 17W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Recessing box not included

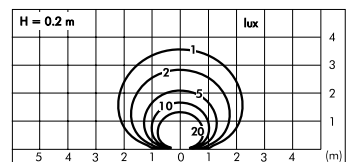

S.4523


RECESSING BOX for MEGABRIQUE
 263 x 135 mm Width 95 mm

Minibrique rectangular with grille



S.4551W



MID-POWER LEDs **3000K** CRI90 452lm
 Rated luminaire luminous flux 34lm
 Rated input power 6W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Recessing box not included

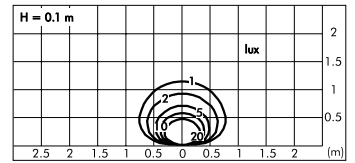

S.4553


RECESSING BOX for MINIBRIQUE
 184 x 74 mm Width 90 mm

Brique rectangular with grille



S.4502W



MID-POWER LEDs **3000K** CRI90 950lm
 Rated luminaire luminous flux 89lm
 Rated input power 10W
 220V-240V AC 50/60Hz Phase-cut dimmer
 Recessing box not included

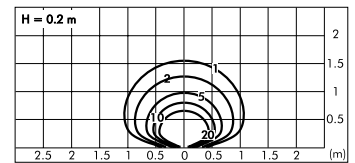

S.4503


RECESSING BOX for BRIQUE
 220 x 92 mm Width 95 mm

Megabrique rectangular with grille



S.4521W



MID-POWER LEDs **3000K** CRI90 1140lm
 Rated luminaire luminous flux 172lm
 Rated input power 17W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Recessing box not included

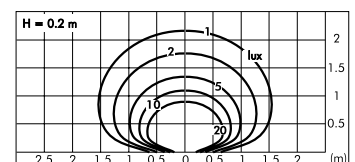

S.4523


RECESSING BOX for MEGABRIQUE
 263 x 135 mm Width 95 mm

Minibrique square with trim

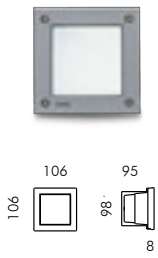



S.4543W

MID-POWER LED **3000K** CRI90 105lm
 Rated luminaire luminous flux 35lm
 Rated input power 2,4W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Recessing box not included

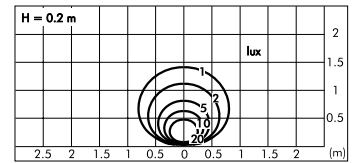


S.4613
RECESSING BOX for
 MINIBRIQUE SQUARE
 98 x 98 mm
 Width 95 mm

Minibrique square with grille

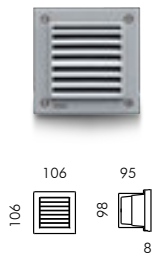

S.4561W

MID-POWER LED **3000K** CRI90 105lm
 Rated luminaire luminous flux 6lm
 Rated input power 2,4W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Recessing box not included

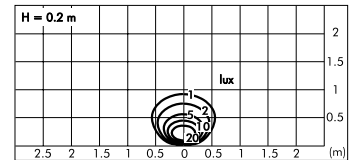

S.4613
RECESSING BOX for
 MINIBRIQUE SQUARE
 98 x 98 mm
 Width 95 mm