


BRIQUE / DIAPASON Step light (wall recessed)

SIMES

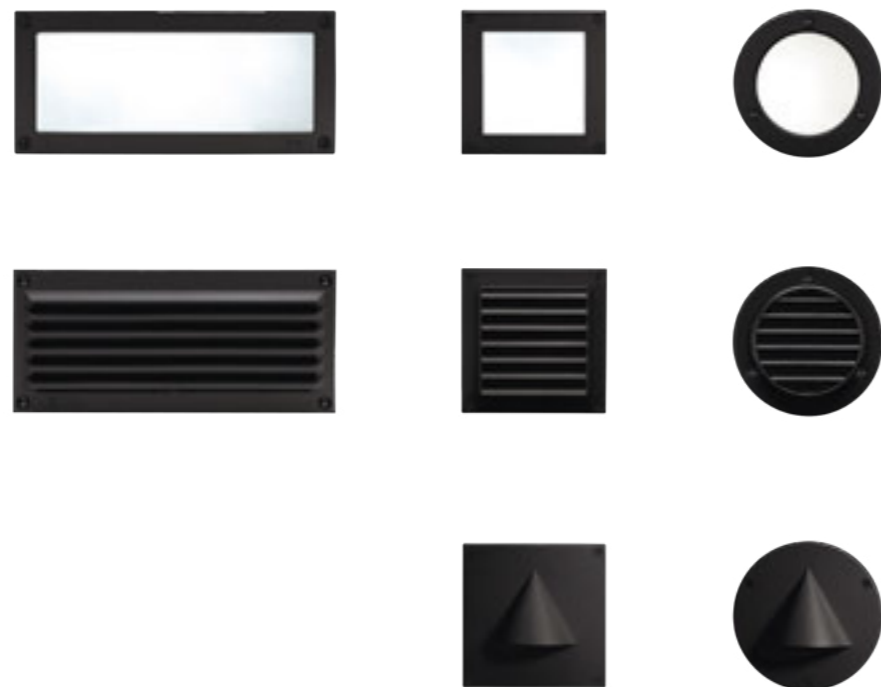

BRIQUE / DIAPASON

Brique and Diapason are wall recessed luminaires available in rectangular, square and round shape, each available in several variants, with front ring, with 45° grille or with visor. Classic design and low power consumption make Brique and Diapason an energy efficient lighting solution from Simes.

TECHNICAL DESCRIPTION

Die-cast aluminium housing with high corrosion resistance. Opal toughened glass diffuser. Stainless steel A4 screws. Silicon gaskets. Double powder paint.

MINIDIAPASON / MINIBRIQUE

Luminaire with one single cable entry and grommet.

BRIQUE

Luminaire with double cable entry and grommet.

PROTECTION CLASS

IP54 MINIDIAPASON / MINIBRIQUE
IP65 BRIQUE

ISOLATION CLASS

CLASS I ⊕

MECHANICAL RESISTANCE

IK 07 MINIDIAPASON / MINIBRIQUE
IK 06 BRIQUE

COLOURS

.09 Black

.14 Aluminium Grey



www.simes.it/brique



BRIQUE Round

SIMES

BRIQUE Square

SIMES

Minibrigue round with ring





S.4533W
LED MODULE **3000K** CRI90 120lm 1,0W
(on request 2700K CRI90 114lm)
(on request 4000K CRI80 149lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included



S.4612
RECESSING BOX for MINIBRIQUE ROUND
Ø 98mm
Width 95mm

Minibrigue square with ring





S.4543W
LED MODULE **3000K** CRI90 120lm 1,0W
(on request 2700K CRI90 114lm)
(on request 4000K CRI80 149lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included



S.4613
RECESSING BOX for MINIBRIQUE SQUARE
98 x 98mm
Width 95mm

Minibrigue round with grille





S.4560W
LED MODULE **3000K** CRI90 120lm 1,0W
(on request 2700K CRI90 114lm)
(on request 4000K CRI80 149lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included



S.4612
RECESSING BOX for MINIBRIQUE ROUND
Ø 98mm
Width 95mm

Minibrigue square with grille



S.4561W
LED MODULE **3000K** CRI90 120lm 1,0W
(on request 2700K CRI90 114lm)
(on request 4000K CRI80 149lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included





S.4613
RECESSING BOX for MINIBRIQUE SQUARE
98 x 98mm
Width 95mm

DIAPASON Round

DIAPASON Square

Minidiapason round





S.4563W
LED MODULE **3000K** CRI90 120lm 1,0W
(on request 2700K CRI90 114lm)
(on request 4000K CRI80 149lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included



S.4612
RECESSING BOX for MINIDIAPASON ROUND
Ø 98mm
Width 95mm

Minidiapason square





S.4573W
LED MODULE **3000K** CRI90 120lm 1,0W
(on request 2700K CRI90 114lm)
(on request 4000K CRI80 149lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable
Recessing box not included



S.4613
RECESSING BOX for MINIDIAPASON SQUARE
98 x 98mm
Width 95mm

Brique rectangular with ring





S.4511W
LED MODULE **3000K** CRI90 967lm 7,3W
(on request 2700K CRI90 893lm)
(on request 4000K CRI80 1368lm)
220V-240V AC 50/60Hz
Phase-cut dimmer
Recessing box not included

Version with DALI 2 power supply
available on request with surcharge



S.4503
RECESSING BOX for BRIQUE
220 x 92mm / Width 95mm

Brique rectangular with grille



S.4502W
LED MODULE **3000K** CRI90 967lm 7,3W
(on request 2700K CRI90 893lm)
(on request 4000K CRI80 1368lm)
220V-240V AC 50/60Hz
Phase-cut dimmer
Recessing box not included

Version with DALI 2 power supply
available on request with surcharge.



S.4503
RECESSING BOX for BRIQUE
220 x 92mm / Width 95mm

