

CEILING Ceiling surface mounted

SIMES


CEILING

Ceiling is a family of surface mounted downlights with clean lines and compact sizes, that integrates perfectly in any context and architecture. The comfort rearward optics ensure the total absence of glare and excellent light beam distribution. Ceiling is available in three sizes, all with a reduced depth of only 55mm. Thanks to the clip-on fixation mechanism of the body to the base, Ceiling is totally free of visible screws.

TECHNICAL DESCRIPTION

Die-cast aluminium housing with high corrosion resistance. Reflectors in polymers covered with aluminium. Nylon black shutters. Toughened glass diffuser 5mm thick in rearward position between the aluminium reflectors and the nylon black shutters. Not visible stainless steel A4 screws. Luminaire pre-wired with 5,0m bipolar flat cable. Double powder paint.

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS III 


MECHANICAL RESISTANCE
IK 07

COLOURS

.01 White (black optic)



.09 Black (black optic)

REGISTERED DESIGN

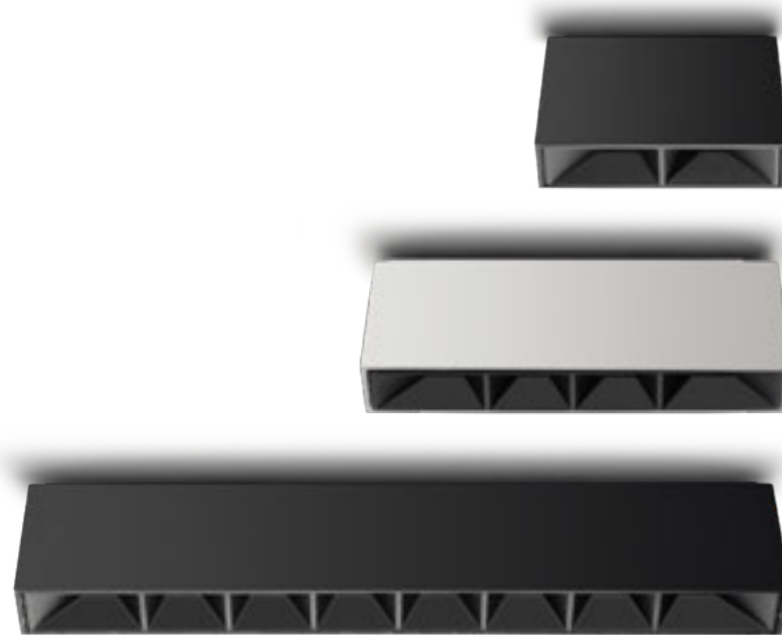

www.simes.it/ceiling



2 LED



S.9060W Wide Flood beam with reflectors
 LED MODULE **3000K** CRI90 520lm 4,2W
 (on request 2700K CRI90 480lm)
 (on request 4000K CRI80 640lm)
24Vdc PWM

Requires constant voltage 24Vdc
 remote power supply (page 522-523)



4 LED



S.9065W Wide Flood beam with reflectors
 LED MODULE **3000K** CRI90 1040lm 8,4W
 (on request 2700K CRI90 960lm)
 (on request 4000K CRI80 1280lm)
24Vdc PWM

Requires constant voltage 24Vdc
 remote power supply (page 522-523)

8 LED

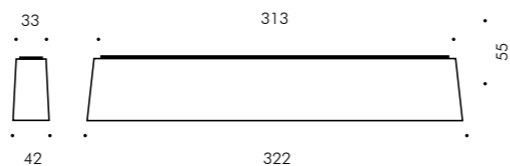

S.9070W Wide Flood beam with reflectors
 LED MODULE **3000K** CRI90 2080lm 16,7W
 (on request 2700K CRI90 1920lm)
 (on request 4000K CRI80 2560lm)
24Vdc PWM

Requires constant voltage 24Vdc
 remote power supply (page 522-523)

