




Cigarette

Urban lighting

Cigarette is a pole luminaire specifically developed for urban applications that comes from the union of an extruded aluminium pole and a polycarbonate diffuser. The combination of the two materials confer an extremely clean and essential design to this pole. With vertical diffused distribution, Cigarette is suitable for creating ambient lighting effects particularly appropriate in urban and landscape applications. The polycarbonate diffuser is UV and impact resistant and guarantees an even light distribution throughout its complete length. A modular fixture based on two different aluminium extrusions and two types of polycarbonate diffusers provide different aesthetical and performance solutions.






CIGARETTE Urban lighting

Extruded EN AW-6060 aluminium profile, Die-cast EN AB-47100 aluminium housing with high corrosion resistance.
Opal polycarbonate diffuser with UV-ray treatment.
Stainless steel screws.
Pre-wired luminaire with neoprene cable and connector.
Silicone gaskets.
Double powder paint.

Protection class
IP65


Isolation class
CLASS II 

Mechanical resistance of glass
IK 10

Leds 4000K CR190 versions are available on request.

For the latest technical information and product updates with LED technology please refer to the official website (www.simes.it)

Colour:

 Anthracite grey (code 24)

REGISTERED DESIGN



S.5506

4 way connector for through wiring (in/out)





S.2499

SURGE PROTECTION DEVICE 10kV
Surge protection devices are utilised to limit the damage of such electrical disturbances (temporary, transitional or permanent). Each fixture must be connected to one single device at a distance of no more than 10m away.




S.2009

FLANGE for CIGARETTE
Ø 150mm h 600mm flange to be fixed in concrete with stainless steel screws for fixing in the ground.

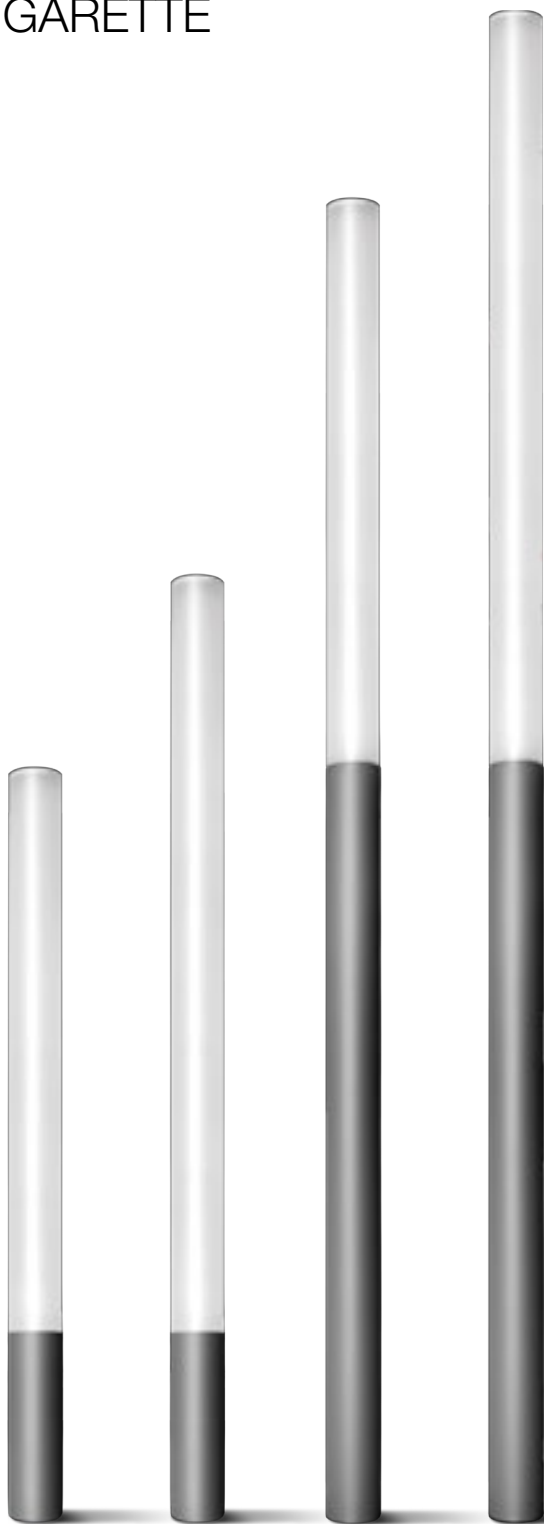


S.2002W □ H 2,0m

MID-POWER LED **3000K** CRI90 5400lm
 Rated luminaire luminous flux 2475lm
 Rated input power 75W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Computer-simulated photometrics




S.2003W □ H 2,5m

MID-POWER LED **3000K** CRI90 7200lm
 Rated luminaire luminous flux 3300lm
 Rated input power 100W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Computer-simulated photometrics



S.2012W □ H 3,5m

MID-POWER LED **3000K** CRI90 5400lm
 Rated luminaire luminous flux 2475lm
 Rated input power 75W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Computer-simulated photometrics



S.2013W □ H 4,0m

MID-POWER LED **3000K** CRI90 7200lm
 Rated luminaire luminous flux 3300lm
 Rated input power 100W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Computer-simulated photometrics

S.2002W

S.2003W

S.2012W

S.2013W

