





Column

Bollard

COLUMN is characterised by solid build quality and a uniform light distribution; it is suitable for the illumination of urban and residential areas, as well as for car parks and walkways. The range includes several dimensions, versions and lighting configurations.

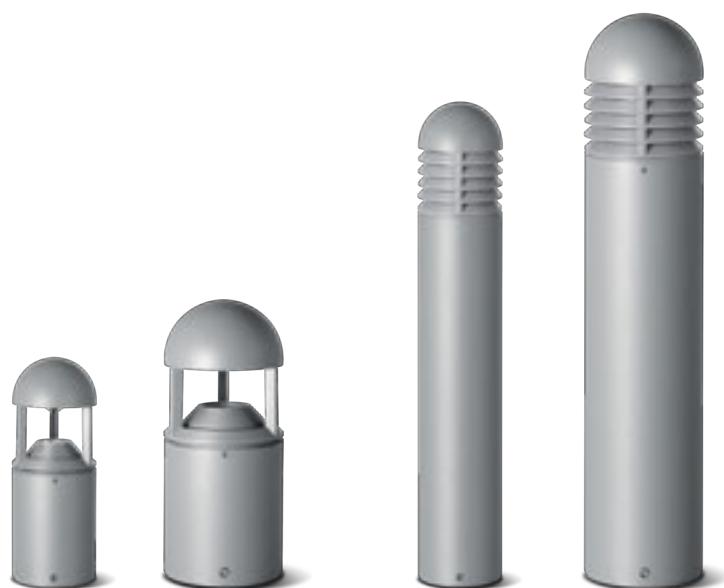



Parish of S.S. Redentore, Seriate (Bergamo), Italy - Arch. Mario Botta © Giannattilio Valli

COLUMN Bollard

Extruded EN AW-6060 aluminium profile, Die-cast EN AB-47100 aluminium housing with high corrosion resistance.

Reflectors in aluminized polycarbonate (Minicolumn).

Clear polycarbonate lens with controlled downward light emission for avoiding any glare (Column).

Polycarbonate vandalproof diffuser.

Stainless steel screws.

Pre-wired luminaire with neoprene cable and connector.


Silicone gaskets.

Double powder paint.

Protection class

IP65


Isolation class

CLASS II 

Mechanical resistance

IK 10

Leds 4000K CRI90 versions are available on request.




S.4219

FLANGE FOR SAFETY BOLLARD
Suitable for COLUMN Ø 200mm H950mm
S.4163W and S.4167W.

Resistant to vehicle impact of 3500Kg up to max speed of 50km/h. Steel flange h 500mm to be cemented in ground. Rooted 500mm into reinforced concrete plinth 1200x1200x1000mm (the flange must be welded to the plinth's rebar).

Colour:

 Aluminium grey (code 14)



For the latest technical information and luminaire updates with LED technology please refer to www.simes.it



S.5506


4 way connector for through wiring (in/out).

H 360 mm



S.4130W

1 COB LED **3000K** CRI90 1075lm
Rated luminaire luminous flux 394lm
Rated input power 11W
220V-240V AC 50/60Hz / DC Not Dimmable


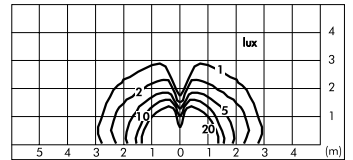


S.4172

FLANGE FOR MINICOLUMN


Ø 140 mm flange to be fixed in concrete with stainless steel screws for fixing in the ground.

H 800 mm



S.4131W

1 COB LED **3000K** CRI90 1075lm
Rated luminaire luminous flux 394lm
Rated input power 11W
220V-240V AC 50/60Hz / DC Not Dimmable


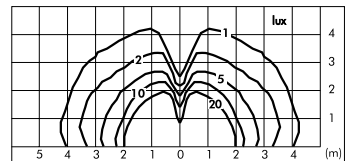


S.4172

FLANGE FOR MINICOLUMN


Ø 140 mm flange to be fixed in concrete with stainless steel screws for fixing in the ground.

H 360 mm



S.4135W

1 COB LED **3000K** CRI90 1075lm
Rated luminaire luminous flux 134lm
Rated input power 11W
220V-240V AC 50/60Hz / DC Not Dimmable


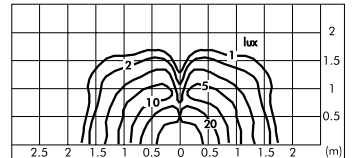


S.4172

FLANGE FOR MINICOLUMN


Ø 140 mm flange to be fixed in concrete with stainless steel screws for fixing in the ground.

H 800 mm



S.4136W

1 COB LED **3000K** CRI90 1075lm
Rated luminaire luminous flux 134lm
Rated input power 11W
220V-240V AC 50/60Hz / DC Not Dimmable


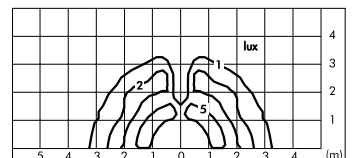


S.4172

FLANGE FOR MINICOLUMN


Ø 140 mm flange to be fixed in concrete with stainless steel screws for fixing in the ground.

H 470 mm



S.4153W

1 COB LED **3000K** CRI90 3674lm
 Rated luminaire luminous flux 1845lm
 Rated input power 37W
 220V-240V AC 50/60Hz / DC Not Dimmable


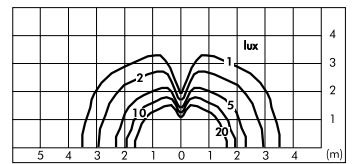


S.4171

FLANGE FOR COLUMN


Ø 195 mm flange to be fixed in concrete with stainless steel screws for fixing in the ground.

H 950 mm



S.4163W

1 COB LED **3000K** CRI90 3674lm
 Rated luminaire luminous flux 1845lm
 Rated input power 37W
 220V-240V AC 50/60Hz / DC Not Dimmable


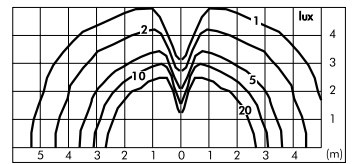


S.4171

FLANGE FOR COLUMN


Ø 195 mm flange to be fixed in concrete with stainless steel screws for fixing in the ground.

H 470 mm



S.4157W

1 COB LED **3000K** CRI90 3674lm
 Rated luminaire luminous flux 832lm
 Rated input power 37W
 220V-240V AC 50/60Hz / DC Not Dimmable


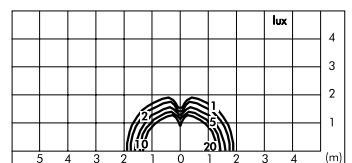


S.4171

FLANGE FOR COLUMN


Ø 195 mm flange to be fixed in concrete with stainless steel screws for fixing in the ground.

H 950 mm



S.4167W

1 COB LED **3000K** CRI90 3674lm
 Rated luminaire luminous flux 832lm
 Rated input power 37W
 220V-240V AC 50/60Hz / DC Not Dimmable

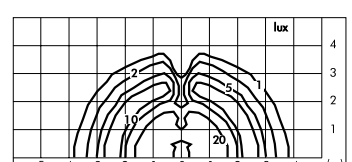

S.4171

FLANGE FOR COLUMN

Ø 195 mm flange to be fixed in concrete with stainless steel screws for fixing in the ground.

