


## COOL SQUARE Wall mounted and bollard

SIMES

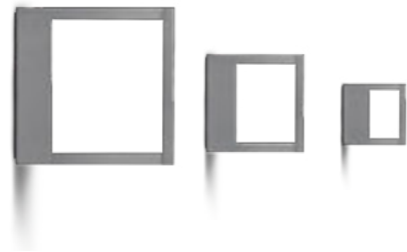

## COOL SQUARE

Cool Square, like the Rectangular version, is expressed with a perfectly diffused indirect light through a void volume. Its extruded shapes give a feeling of solidity and open the door to many applications. The family is available in three sizes as wall and bollard, all with integrated power supply.

### TECHNICAL DESCRIPTION

Die-cast aluminium housing, extruded aluminium structure (bollard version) with high corrosion resistance. Toughened glass diffuser. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

### MICROCOOL SQUARE APPLIQUE

Luminaire supplied with 1,5m neoprene H05RN-F cable.

### MINICOOL AND COOL SQUARE APPLIQUE

Luminaire with one single cable entry and grommet.

### BOLLARDS

Luminaire supplied with neoprene H05RN-F cable and connector.

### REGISTERED DESIGN

PROTECTION CLASS  
IP54

ISOLATION CLASS  
CLASS I Ⓢ

MECHANICAL RESISTANCE  
IK 06



### COLOURS

.01 White

.09 Black

.14 Aluminium Grey




[www.simes.it/cool-square](http://www.simes.it/cool-square)

## MICROCOOL SQUARE 95mm


SIMES

### Microcool Square applique



**S.7282W**  
LED MODULE **3000K** CRI90 630lm 5,3W  
(on request 2700K CRI90 598lm)  
(on request 4000K CRI80 839lm)  
220V-230Vac 50/60Hz  
ON/OFF Not Dimmable

### Microcool Square bollard H 290mm




**S.7287W**  
LED MODULE **3000K** CRI90 630lm 5,3W  
(on request 2700K CRI90 598lm)  
(on request 4000K CRI80 839lm)  
220V-230Vac 50/60Hz  
ON/OFF Not Dimmable



**S.7284**  
**FLANGE FOR MICROCOOL SQUARE BOLLARD**  
Flange to be anchored in concrete for S.7287W



## MINICOOL SQUARE 150mm

### Minicool Square applique



**S.7281W**  
LED MODULE **3000K** CRI90 1260lm 10,7W  
(on request 2700K CRI90 1197lm)  
(on request 4000K CRI80 1680lm)  
220V-230Vac 50/60Hz  
ON/OFF Not Dimmable

### Minicool Square bollard H 450mm

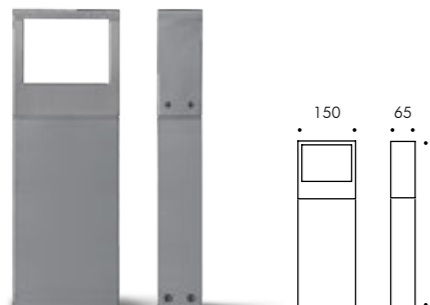

**S.7286W**  
LED MODULE **3000K** CRI90 1260lm 10,7W  
(on request 2700K CRI90 1197lm)  
(on request 4000K CRI80 1680lm)  
220V-230Vac 50/60Hz  
ON/OFF Not Dimmable



**S.7288**  
**FLANGE FOR MINICOOL SQUARE BOLLARD**  
Flange to be anchored in concrete for S.7286W



MAINA Headquarter Arch. Gianni Amaudo, Fossano, Cuneo, Italy © Ph. Mario Bertani



# COOL SQUARE 220mm



SIMES

## Cool Square applique






**S.7280W**  
LED MODULE 3000K CRI90 2625lm 22,3W  
(on request 2700K CRI90 2493lm)  
(on request 4000K CRI80 3501lm)  
220V-240Vac 50/60Hz  
Dimmable DALI 2 / PUSH

## Cool Square bollard H 580mm






**S.7285W**  
LED MODULE 3000K CRI90 2625lm 22,3W  
(on request 2700K CRI90 2493lm)  
(on request 4000K CRI80 3501lm)  
220V-240Vac 50/60Hz  
Dimmable DALI 2 / PUSH

## Cool Square long H 580mm

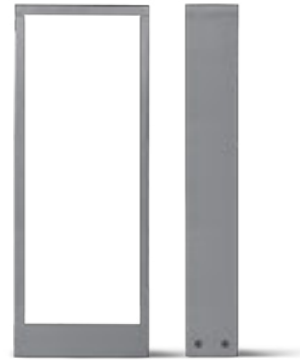

**S.7290W**  
LED MODULE 3000K CRI90 2625lm 22,3W  
(on request 2700K CRI90 2493lm)  
(on request 4000K CRI80 3501lm)  
220V-240Vac 50/60Hz  
Dimmable DALI 2 / PUSH

## Cool Square long bollard H 1160mm

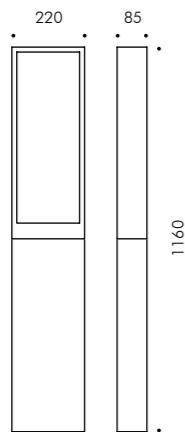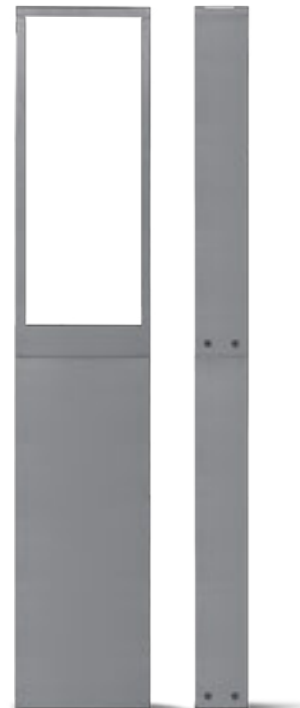


**S.7295W**  
LED MODULE 3000K CRI90 2625lm 22,3W  
(on request 2700K CRI90 2493lm)  
(on request 4000K CRI80 3501lm)  
220V-240Vac 50/60Hz  
Dimmable DALI 2 / PUSH

## Accessory



**S.7289**  
**FLANGE FOR COOL SQUARE BOLLARD**  
Flange to be anchored in concrete  
for S.7285W, S.7290W and S.7295W

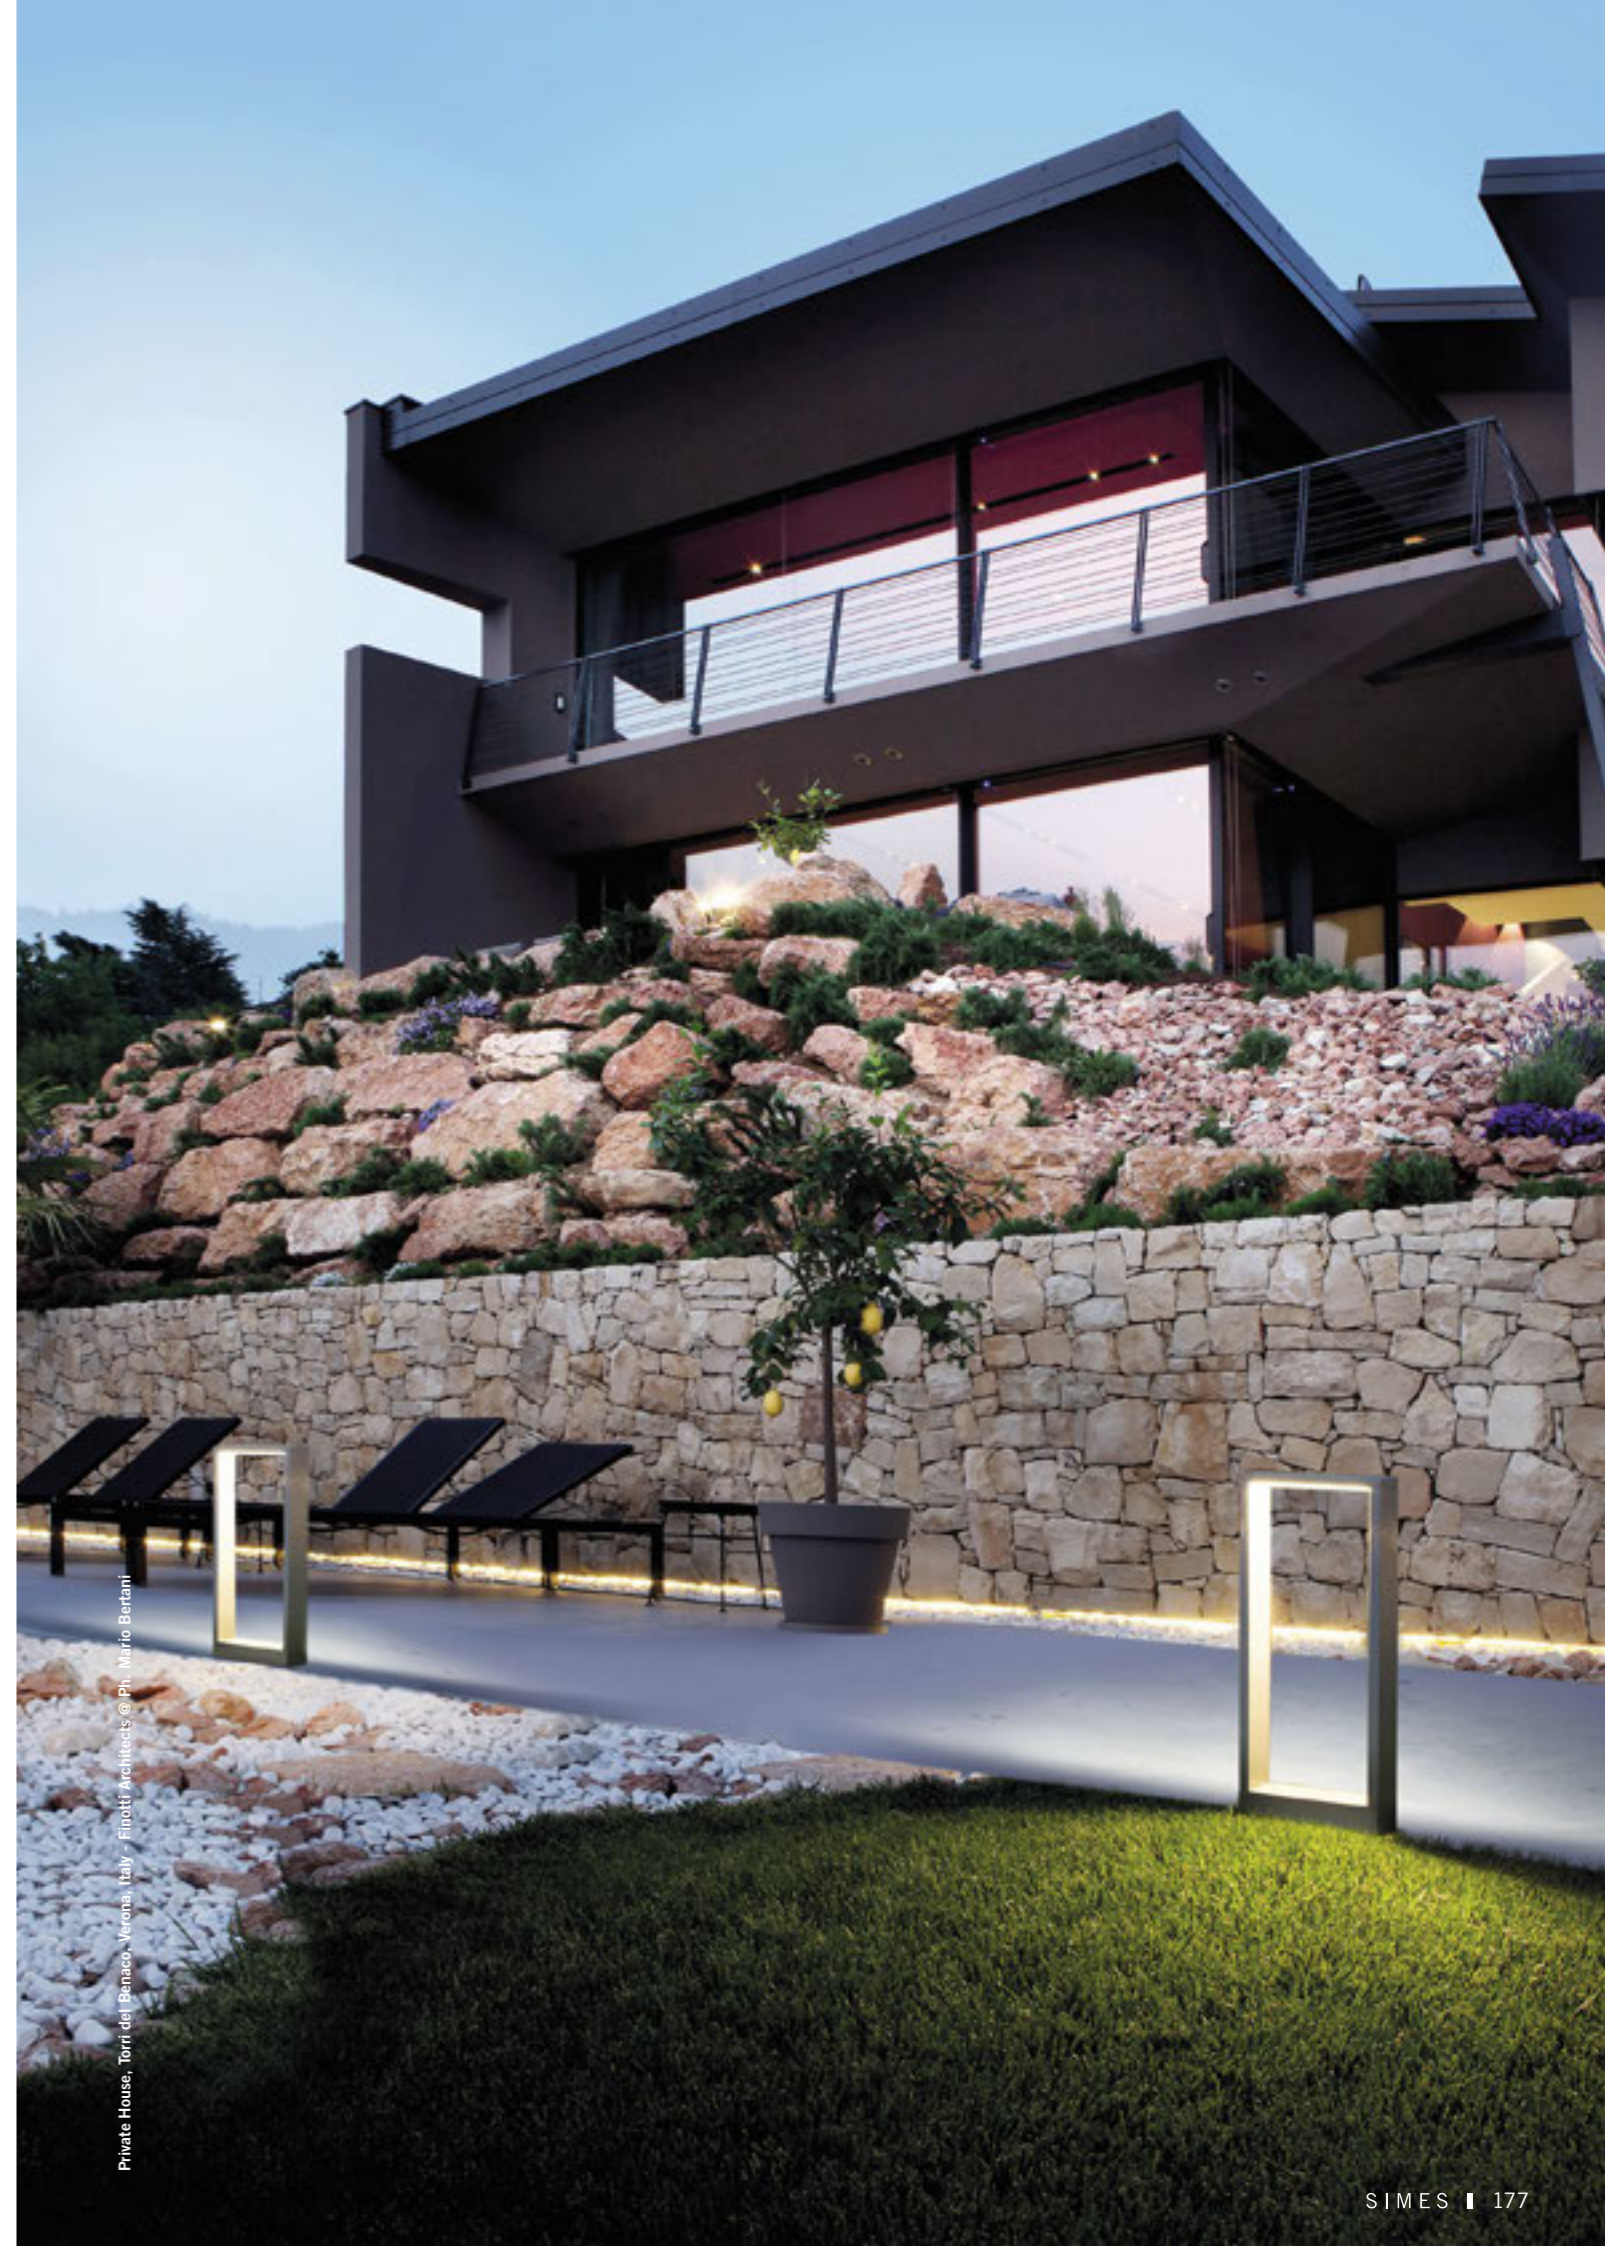

Private House, Torri del Benaco, Verona, Italy - Finotti Architects @ Ph. Mario Bertani