




PB Pedestrian Bridge, Millennium Park, Chicago, USA

# EOS

## Wall recessed and bollard

With its classical design, EOS is the wall recessed solution for projects that require an attractive design and maximum visual comfort. EOS is designed and engineered to have a glare free downward light distribution. The concealed horizontal glass diffuser has optimum vandal resistance.





## EOS

Die-cast EN AB-47100 aluminium housing with high corrosion resistance.  
Opal toughened glass diffuser.  
Stainless steel screws  
Luminaire suitable for single grommet.  
Double cable entries.  
Dutral gaskets.  
**Double powdered paint.**

### Protection class

IP55 MINIEOS SQUARE and  
MEGAEOS  
IP65

### Isolation class

CLASS I ⊕

### Mechanical resistance of diffuser

IK 05 MINIEOS SQUARE

IK 06



### Lamp HIT e TC not included.

Leds 4000K CRI90 versions are available on request.


*For the latest technical information and product updates with LED technology please refer to the official website ([www.simes.it](http://www.simes.it))*



### S.4350

#### EOS BOLLARD ACCESSORY

Die-cast aluminium column.  
Base 240 x 160 mm  
H = 550 mm  
(Order luminaire EOS SQUARE separately)



### S.4372



#### FLANGE FOR EOS BOLLARD

Steel flange with stainless steel screws (to be fixed in concrete).

### Colour:


○ Aluminium grey (code 14)

## Minieos square



### S.4610W



With leds white **3000K** CRI90 210lm  
 Rated luminaire luminous flux 39lm  
 Rated input power 4W 230V  
 Recessing box not included

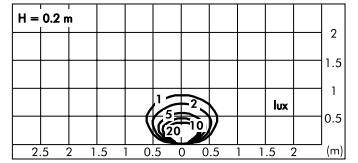

### S.4613


**RECESSING BOX** for MINIEOS SQUARE  
 98 x 98 mm Width 95 mm

## Eos square



### S.4605W


With leds white **3000K** CRI90 950lm  
 Rated luminaire luminous flux 179lm  
 Rated input power 14W 230V  
 Recessing box not included

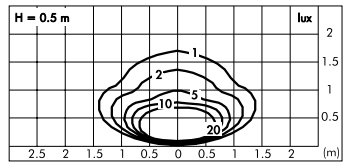

### S.4609





For lamp TC-DEL 18W G24q-2 1200lm  
 Rated luminaire luminous flux 120lm  
 Rated input power 22W 230V  
 Recessing box not included

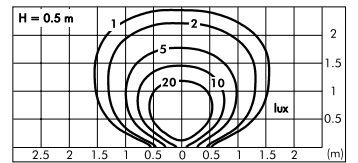

### S.4343

**RECESSING BOX** for EOS SQUARE  
 217 x 187 mm Width 100 mm


## Megaeos square



### S.4640





For lamp HIT-DE 70W Rx7s 6500lm  
 Rated luminaire luminous flux 780lm  
 Rated input power 84W 230V  
 Recessing box not included

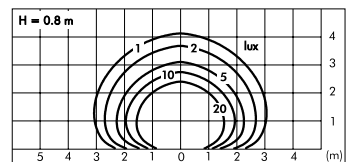

### S.4633.12


**RECESSING BOX** for MEGAEOS SQUARE  
 284 x 284 mm Width 142 mm

Minieos rectangular




**S.4621W** □

With leds white **3000K** CRI90 380lm  
 Rated luminaire luminous flux 43lm  
 Rated input power 6W 230V  
 Recessing box not included

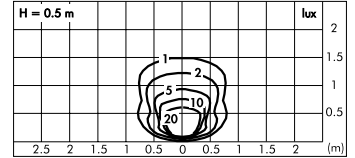

**S.4629** □



For lamp TC-DEL 10W G24q-1 600lm  
 Rated luminaire luminous flux 36lm  
 Rated input power 15W 230V  
 (Use only OSRAM lamps made in EUROPE)  
 Recessing box not included

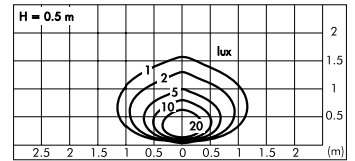

**S.4623**


**RECESSING BOX** for MINIEOS RECTANGULAR  
 145 x 90 mm Width 140 mm

Eos rectangular




**S.4615W** □

With leds white **3000K** CRI90 1140lm  
 Rated luminaire luminous flux 172lm  
 Rated input power 17W 230V  
 Recessing box not included

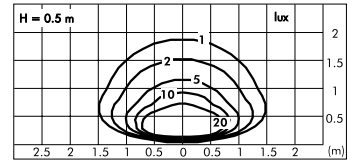

**S.4619** □

For lamp TC-DEL 26W G24q-3 1800lm  
 Rated luminaire luminous flux 162lm  
 Rated input power 31W 230V  
 Recessing box not included

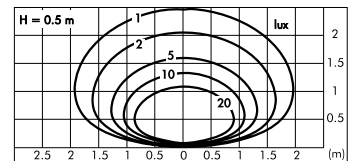

**S.4523**

**RECESSING BOX** for EOS RECTANGULAR  
 263 x 135 mm Width 95 mm

VN POPOLO DI POETI DI ARTISTI DI EROI  
DI SANTI DI PENSATORI DI SCIENZIATI  
DI NAVIGATORI DI TRASMIGRATORI

