




PB Pedestrian Bridge, Millennium Park, Chicago, USA

EOS

Wall recessed

With its classical design, EOS is the wall recessed solution for projects that require an attractive design and maximum visual comfort. EOS is designed and engineered to have a glare free downward light distribution. The concealed horizontal glass diffuser has optimum vandal resistance.





EOS Wall recessed

Die-cast EN AB-47100 aluminium housing with high corrosion resistance.
Opal toughened glass diffuser.
Stainless steel screws
Luminaire with one single cable entry and grommet (Minieos).
Luminaire with double cable entry and grommet (Eos Square and Rectangular).
EPDM gaskets.
Double powder paint.

Protection class
IP55 Minieos Square
IP65

Isolation class
CLASS I ⊕

Mechanical resistance of diffusor
IK 05 Minieos Square
IK 06





Leds 4000K CRI90 versions are available on request.

Colour:

○ Aluminium grey (code 14)


For the latest technical information and luminaire updates with LED technology please refer to www.simes.it

Minieos square



S.4610W □

MID-POWER LEDs **3000K** CRI90 210lm
 Rated luminaire luminous flux 39lm
 Rated input power 4W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Recessing box not included


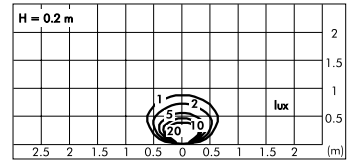


S.4613

RECESSING BOX for MINIEOS SQUARE
 98 x 98 mm Width 95 mm




Eos square



S.4605W □

MID-POWER LEDs **3000K** CRI90 950lm
 Rated luminaire luminous flux 179lm
 Rated input power 14W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Recessing box not included


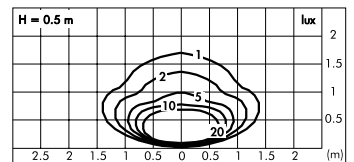


S.4343

RECESSING BOX for EOS SQUARE
 217 x 187 mm Width 100 mm




Eos rectangular



S.4615W □

MID-POWER LEDs **3000K** CRI90 1140lm
 Rated luminaire luminous flux 264lm
 Rated input power 14,8W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Recessing box not included

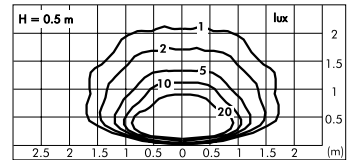

S.4523

RECESSING BOX for EOS RECTANGULAR
 263 x 135 mm Width 95 mm

