



Feeling

**Floor standing, garden stake,
wall and ceiling applique**

Feeling was born as a response to the recurring need to enhance the lighting of private outdoor spaces such as terraces and gardens, making them cosy and comfortable as if they are indoor spaces. A decorative family for outdoors with a minimalist character and elegant and charming ambient light. Feeling is available in floor standing, garden stake and wall or ceiling applique.

In the applique version, its thin stem can perform two different rotations: the first one, around its own axis, allows to direct the light beam, creating direct, indirect or lateral light effects; the second one, around the fixing joint, allows the rotation of the stem from a vertical position to a diagonal or horizontal position.

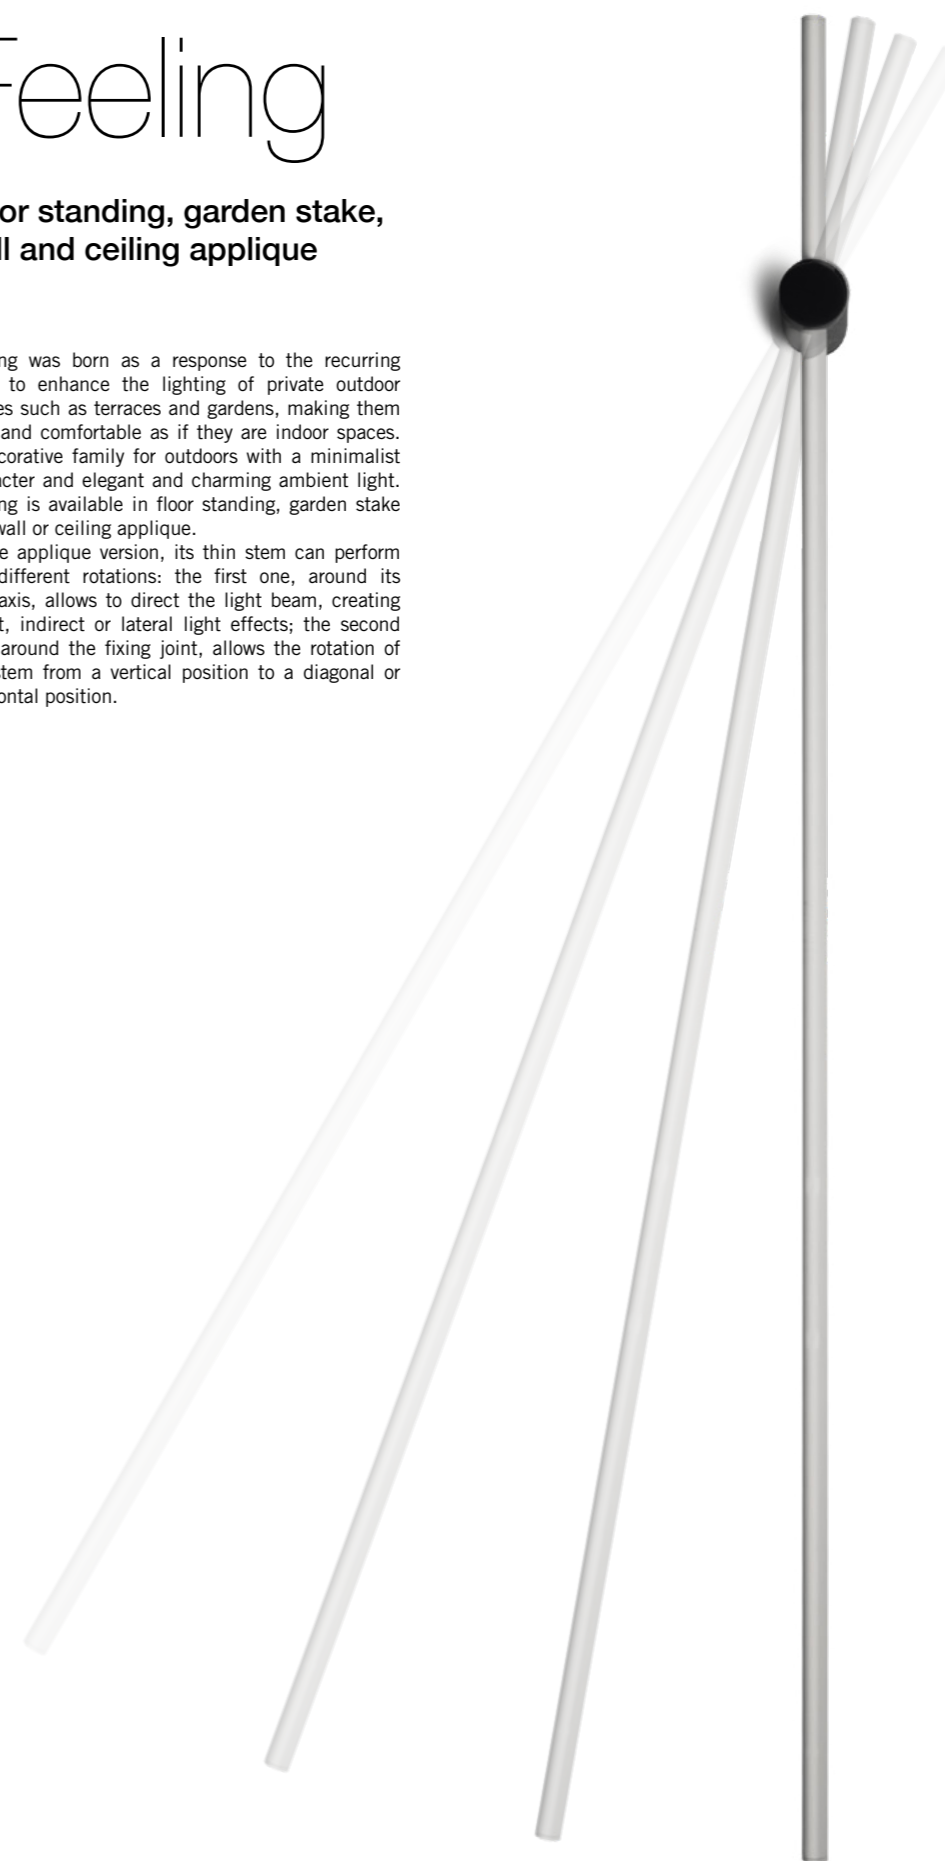



FEELING Floor standing, garden stake, wall and ceiling applique

Die-cast EN AB-47100 aluminium housing, extruded EN AW-6060 aluminium structure with high corrosion resistance. Stainless steel screws. Silicone gaskets.
Double powder paint.

Applique
 Luminaire supplied with 5,0m in neoprene H05RN-F cable

Garden Stake
 Luminaire supplied with 0,4m of bipolar flat cable and fast connector

Floor standing
 Luminaire supplied with 3,0m in neoprene H05RN-F cable and push button.

Protection class
 IP65

Isolation class
 CLASS I ⚡ FLOOR STANDING
 CLASS III ⚡ APPLIQUE, GARDEN STAKE

Mechanical resistance
 IK 06

REGISTERED DESIGN

For the latest technical information and product updates with LED technology please refer to the official website (www.simes.it)

Applique and Floor standing rod colours


- .01** White (pivot / base black)
- .09** Black (pivot / base black)

Garden Stake rod colours

- .01** White (base black)
- .09** Black (base black)
- .07** Dark green (base black)


Adjustable light beam

Rotation of 180° around its own axis

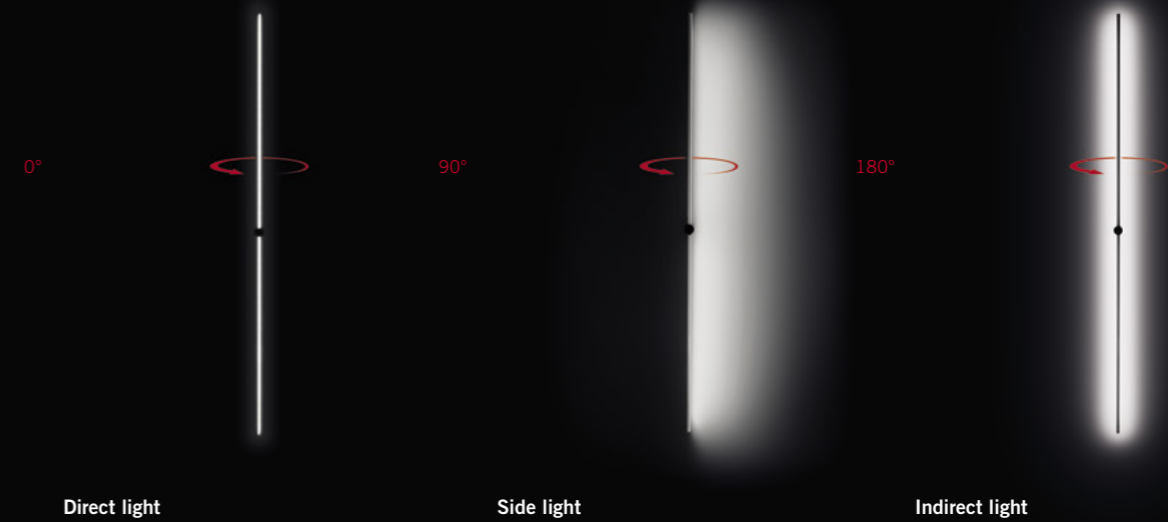


Adjustable luminaire position (for applique version)

Rotation of 350° around the fixing joint

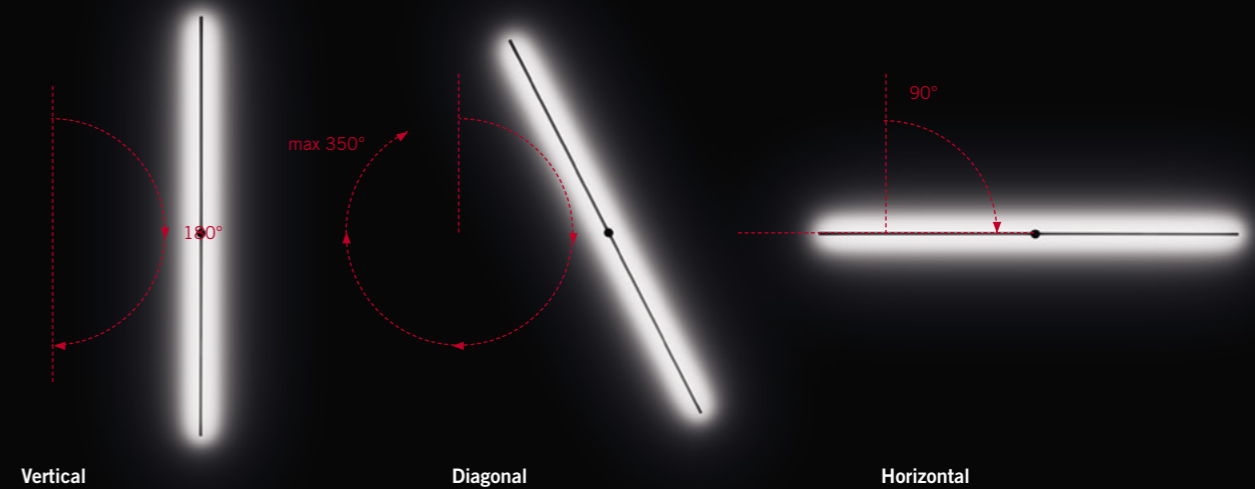


Applique 200 cm



S.2281W Applique 200 cm
 MID-POWER LED 3000K CRI90 480lm
 Rated luminaire luminous flux 480lm
 Rated input power 14,5W 24V DC

Require constant voltage remote power supply
 Computer-simulated photometrics


Supplied with cable 5,0m




S.2280W Applique 120 cm
 MID-POWER LED 3000K CRI90 290lm
 Rated luminaire luminous flux 290lm
 Rated input power 9W 24V DC

Require constant voltage remote power supply
 Computer-simulated photometrics


Supplied with cable 5,0m

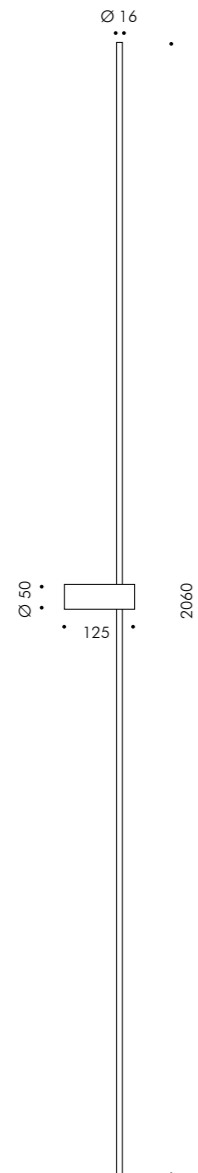

Applique 120 cm

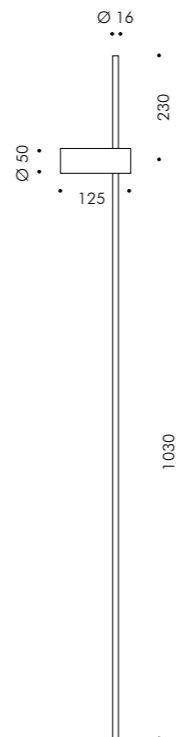


Floor standing
200 cm



S.2286W Floor standing 200 cm
MID-POWER LED 3000K CRI90 480lm
Rated luminaire luminous flux 480lm
Rated input power 16W
220V-240V AC 50/60Hz
Push button dimmable

Supplied with cable 3,0m



S.2285W Garden stake 100 cm
MID-POWER LED 3000K CRI90 240lm
Rated luminaire luminous flux 240lm
Rated input power 7,2W 24V DC

Require constant voltage remote power supply
Computer-simulated photometrics

Supplied with cable 0,2m and fast connector

