




FOCUS SUSPENSION is the perfect choice for outdoor as for indoor application where specific performances are required. Any architecture with high ceilings as well as any environments with high humidity levels, swimming-pools and spas. The reflectors have been specifically studied to assure uniform light distribution on the ground and very good quantity of light.



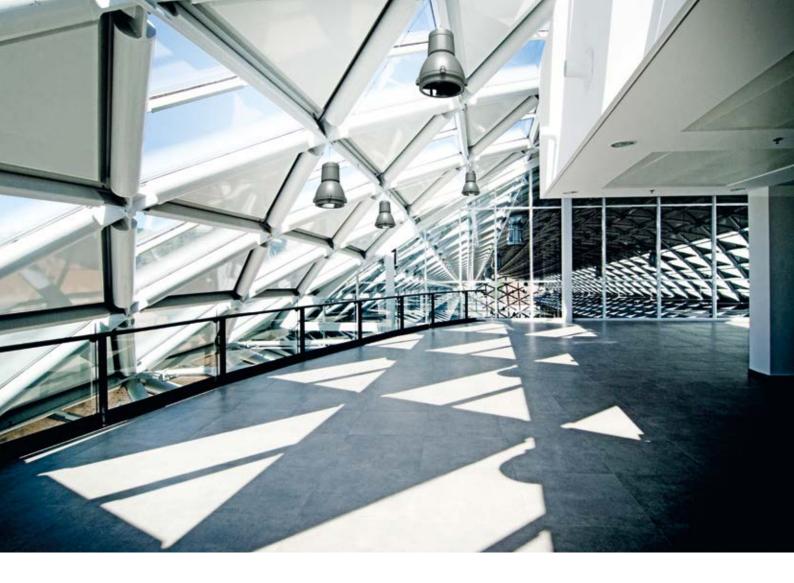

FOCUS SUSPENSION

Die-cast EN AB-47100 aluminium housing with high corrosion resistance. 99.98% pure aluminium reflectors. Clear toughened glass. Stainless steel screws. Steel suspension cable 80 cm long. Luminaire hard wired with single neoprene cable with cable gland. Silicone gaskets.

Double powdered paint.

Colour:

Aluminium grey (code 14)

Protection class

IP66


Isolation class CLASS I (4)

 $\begin{tabular}{ll} \textbf{Mechanical resistance of glass}\\ \textbf{IK } 10 \end{tabular}$

Lamp HIT not included.

Leds 4000K CRI90 versions are available on request.

For the latest technical information and product updates with LED technology please refer to the official website (www.simes.it)

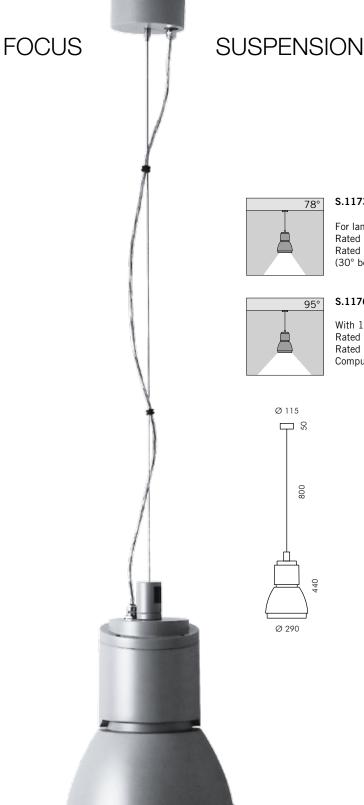

S.1173	
	- F

S.1176W •

h(m)	Ø(m)	E(lx)
1	1.61	5956
2 3	3.23 4.84	1489 662
4 5	6.46 8.07	372 238
_	95	
h(m)	Ø(m)	E(lx)

78°



With 1 led COB white 3000K CRI90 6685Im Rated luminaire luminous flux 2995lm Rated input power 57W 230V Computer-simulated photometrics

1	2.17	1446
2	4.35	362
3	6.52	161
4	8.70	90
5	10.87	58