



www.simes.it/ikonic

Ikonic is a family of cylindrical bollards, available in three dimensions and different heights. The perfect alignment of glass and aluminium enhances its elegance making it ideal for public and residential spaces. The lighting source on the top of the head directs the light downwards to grant a great distribution on the surface. The optic is black painted and guarantees the total absence of lighting refraction and glare.

TECHNICAL DESCRIPTION
Extruded Ealuminium profile, Die-cast aluminium housing with high corrosion resistance. Borosilicate glass diffuser 7mm thick. Stainless steel A4 screws. Luminaire supplied with neoprene H05RN-F cable and connector. Silicone gaskets.Double powder paint.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II ☐

MECHANICAL RESISTANCE
IK 06

COLOURS

.09

Black

.14

Aluminium Grey





MICRO IKONIC ø 102mm

SIMES

IKONIC ø 200mm

SIMES

Micro Ikonic H 500mm





S.4100W
LED MODULE **3000K** CRI90 1140lm 10,0W
(on request 2700K CRI90 1100lm)
(on request 4000K CRI80 1323lm)
220V-230Vac 50/60Hz
Phase-cut dimmer



S.2149
FLANGE FOR MICRO IKONIC ø 102mm
Flange to be anchored in concrete



Ikonic H 410mm



S.4110W
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



MINI IKONIC ø 140mm

Mini Ikonic H 315mm



S.4101W
LED MODULE **3000K** CRI90 1952lm 14,7W
(on request 2700K CRI90 1856lm)
(on request 4000K CRI80 2393lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Ikonic H 890mm


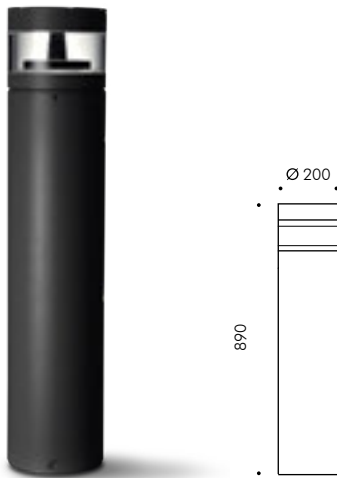


S.4114W
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.4171
FLANGE FOR IKONIC ø 200mm
Flange to be anchored in concrete
for S.4110W e S.4114W

Mini Ikonic H 755mm


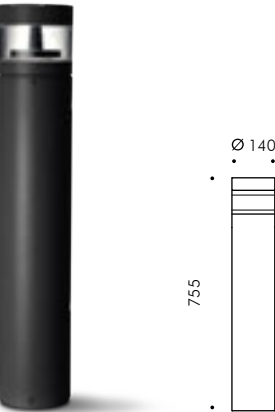


S.4104W
LED MODULE **3000K** CRI90 1952lm 14,7W
(on request 2700K CRI90 1856lm)
(on request 4000K CRI80 2393lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.4172
FLANGE FOR MINI IKONIC ø 140mm
Flange to be anchored in concrete

Ikonic H 2415mm

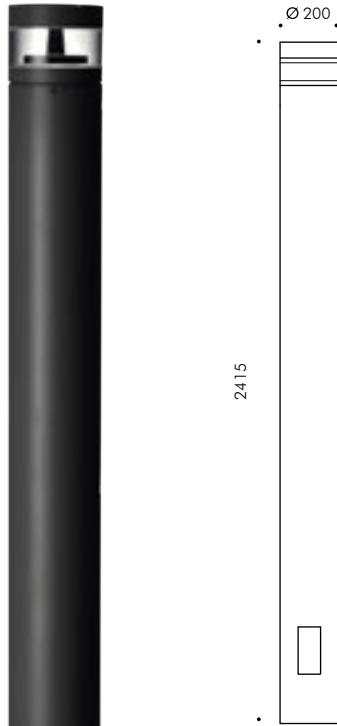

S.4117W
LED MODULE **3000K** CRI90 4027lm 31,9W
(on request 2700K CRI90 3829lm)
(on request 4000K CRI80 4936lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



S.4129
FLANGE FOR IKONIC ø 200mm H 2415mm
Flange h 800mm to be anchored in concrete

