

Kube maintains the technical characteristics of the Cool family and proposes them in solid and cubic sizes. Characterized by the beauty of a void volume filled with light that pours indirectly on the wall or on the ground, Kube ensures excellent light diffusion and great visual comfort. The shapes are expressed in applique and bollard, all available with integrated driver.

TECHNICAL DESCRIPTION

Die-cast aluminium, extruded aluminium structure (bollard version) with high corrosion resistance. Toughened glass diffuser 4mm thick. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

MICROKUBE, MICROKUBE LONG
Luminaire with one single cable entry and grommet.

KUBE, KUBE LONG
Luminaire with double cable entry and grommet.

MICROKUBE LONG BOLLARD, KUBE LONG BOLLARD
Luminaire supplied with neoprene H05RN-F cable and connector.

REGISTERED DESIGN

PROTECTION CLASS
IP54

ISOLATION CLASS
CLASS I Ⓢ

MECHANICAL RESISTANCE
IK 06

COLOURS

.01 White

.09 Black

.14 Aluminium Grey




www.simes.it/kube

MICROKUBE 120mm

SIMES

Microkuba



S.6300W


LED MODULE **3000K** CRI90 1103lm 9,3W
 (on request 2700K CRI90 970lm)
 (on request 4000K CRI80 1470lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable



S.1014

STAKE FOR MICROKUBE
 in polypropylene



Microkuba long H 450mm



S.6306W

LED MODULE **3000K** CRI90 1103lm 9,3W
 (on request 2700K CRI90 970lm)
 (on request 4000K CRI80 1470lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

Microkuba long bollard H 900mm

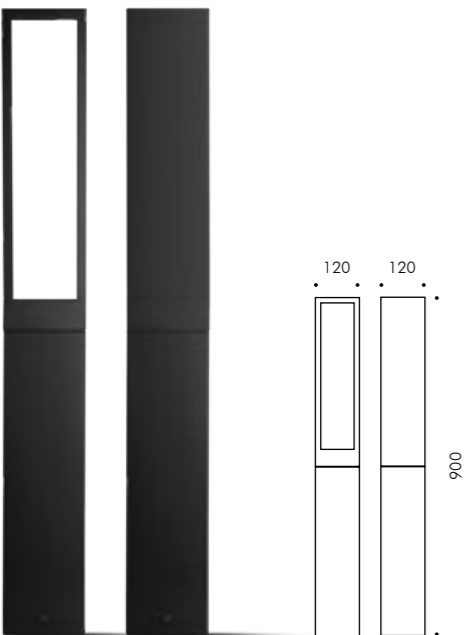

S.6307W

LED MODULE **3000K** CRI90 1103lm 9,3W
 (on request 2700K CRI90 970lm)
 (on request 4000K CRI80 1470lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

Accessory



S.6309

FLANGE FOR MICROKUBE
 Ø 120 mm flange to be buried in concrete
 for S.6306W and S.6307W.


Private Villa, Els Gorgs, Spain - Landscape project: Paula Mendonça © Ph. Miquel Tres




KUBE 240mm

SIMES


Kube




S.6340W
 LED MODULE 3000K CRI90 5250lm 44,5W
 (on request 2700K CRI90 3686lm)
 (on request 4000K CRI80 6090lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




Kube long H 580mm




S.6346W
 LED MODULE 3000K CRI90 5250lm 44,5W
 (on request 2700K CRI90 3686lm)
 (on request 4000K CRI80 6090lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



Kube long bollard H 1350mm



S.6347W
 LED MODULE 3000K CRI90 5250lm 44,5W
 (on request 2700K CRI90 3686lm)
 (on request 4000K CRI80 6090lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

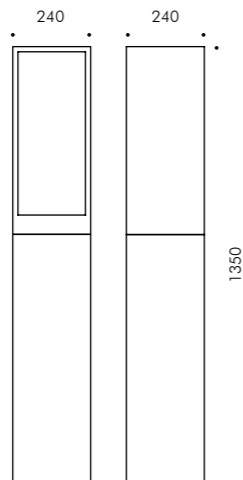

Accessory



S.3554
STAKE FOR KUBE S.6340W
 in polypropylene



S.5350
FLANGE FOR KUBE S.6340W - S.6346W
- S.6347W
 Flange Ø 240mm to be anchored in concrete



Private villa, Corte Franca Italy - Ad Architettura - Arch. Massimo Castagna © Simes S.p.A.