

Lift is a family of square wall applique proposed in two sizes that creates bright accents on the wall thanks to special lenses. Its minimalist design integrates perfectly into the environments in which it is located. The different effects marked with light can enhance any facade making the light effect the protagonist.

TECHNICAL DESCRIPTION

Die-cast aluminium housing with high corrosion resistance. Reflector in polymers covered with pure aluminium. Clear toughened glass. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

MINILIFT

Luminaire through wiring cable entry and grommet.

LIFT

Luminaire with double cable entry and cable grommets.

REGISTERED DESIGN

PROTECTION CLASS
IP65


ISOLATION CLASS
CLASS I ⊕ LIFT
CLASS II ⊞ MINILIFT

MECHANICAL RESISTANCE
IK 06 MINILIFT, LIFT

COLOURS



.09 Black

.14 Aluminium Grey

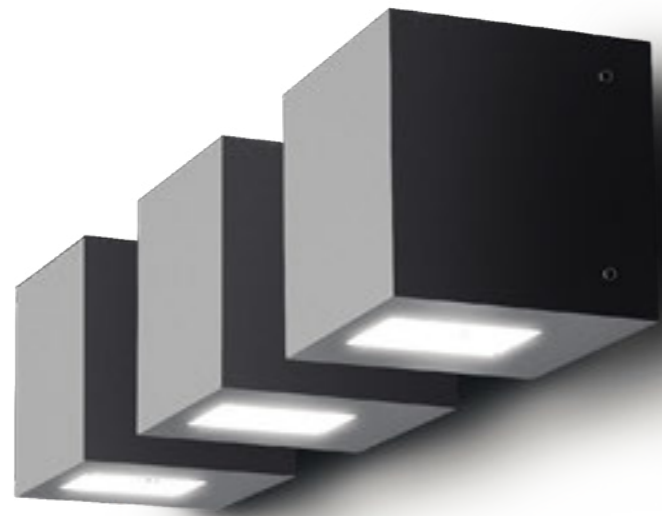


www.simes.it/lift


1 wide beam




S.5077W
LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




2 narrow beams




S.5047W
2 x LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




1 narrow beam




S.5067W
LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




4 narrow beams



S.5087W
4 x LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable





2 wide beams




S.5027W
2 x LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




4 wide beams



S.5097W
4 x LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



1 wide beam + 1 narrow beam




S.5037W
2 x LED MODULE **3000K** CRI80 196lm 2W
(on request 2700K CRI80 182lm)
(on request 4000K CRI80 210lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable






1 wide beam





S.5070W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply available on request with surcharge.




2 narrow beams




S.5040W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply available on request with surcharge.




1 narrow beam




S.5075W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply available on request with surcharge.




4 narrow beams




S.5080W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply available on request with surcharge.




2 wide beams





S.5026W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply available on request with surcharge.



4 wide beams





S.5090W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply available on request with surcharge.



1 wide beam + 1 narrow beam



S.5033W
LED MODULE **3000K** CRI90 2034lm 15,3W
(on request 2700K CRI90 1933lm)
(on request 4000K CRI80 2493lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Version with DALI 2 / PUSH power supply available on request with surcharge.

