




Private residence, Malta © Light Design solutions LTD

Continuous line

Walk-over

CONTINUOUS LINE is a walk-over fitting designed to create paths of light with perfect uniformity and unlimited length. Extremely easy to install, this luminaire can transform any space with class and refinement.

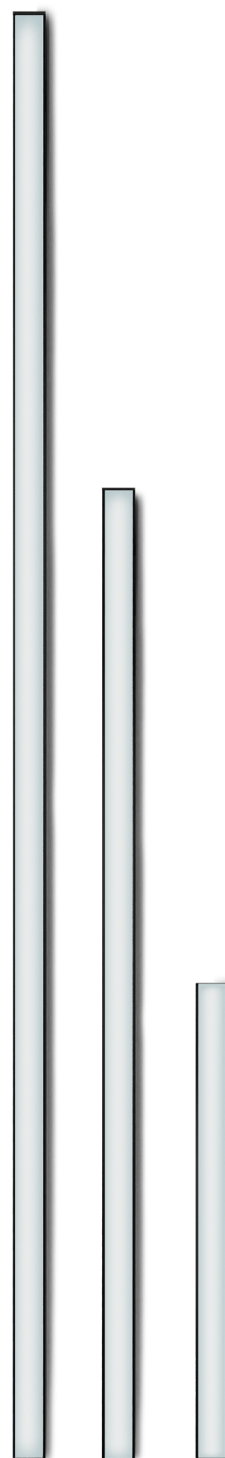



Giardino della Pace, Sotto il Monte, Bergamo, Italy © SIMES S.p.A.

CONTINUOUS LINE Walk-over

To-be-fixed supports and recessing box in extruded anodized EN AW-6060 aluminium housing with high corrosion resistance.
Toughened glass diffuser 15 mm thick.
Pre-wired luminaire with neoprene cable and connector.
Fixing bases and recessing box included.

Maximum weight 500 Kg


Colour:

○ Anodized aluminium (code 13)

Protection class

IP65 / IP67

Isolation class

CLASS III 

Mechanical resistance

IK 10





Power supply not included


Leds 4000K CRI80 versions are available on request.


PATENTED

For the latest technical information and luminaire updates with LED technology please refer to www.simes.it

Fullglass 500 mm


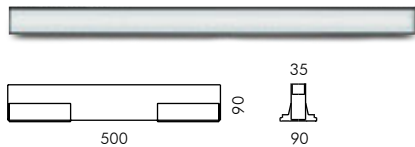



S.7016W 
 MID-POWER LEDs **3000K** CRI80 360lm
 Rated luminaire luminous flux 165lm
 Rated input power 3,5W **24V DC**
 Requires constant voltage remote power supply
 (page 468-469)




T 39°C

Fullglass 1000 mm


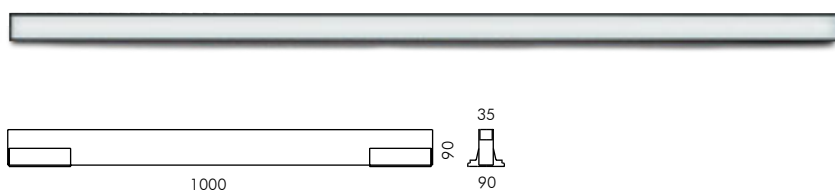



S.7011W 
 MID-POWER LEDs **3000K** CRI80 740lm
 Rated luminaire luminous flux 330lm
 Rated input power 7W **24V DC**
 Requires constant voltage remote power supply
 (page 468-469)




T 39°C

Fullglass 1500 mm

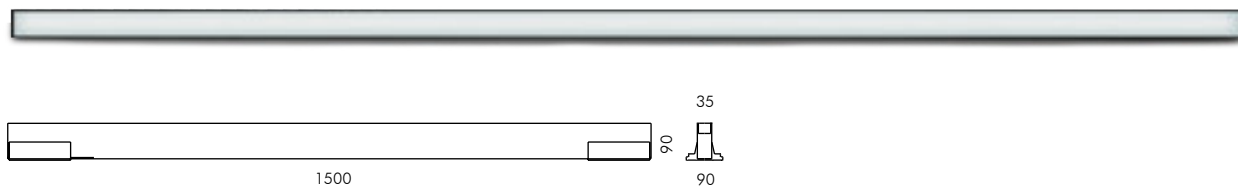

S.7012W 
 MID-POWER LEDs **3000K** CRI80 1100lm
 Rated luminaire luminous flux 495lm
 Rated input power 10,5W **24V DC**
 Requires constant voltage remote power supply
 (page 468-469)



T 39°C