

## CONTINUOUS LINE Inground walkover

SIMES



## CONTINUOUS LINE

Continuous Line is a walk over fitting designed to create paths of light with perfect uniformity and unlimited length. Easy to install, this luminaire can transform any space with style and refinement.

### TECHNICAL DESCRIPTION

To-be-fixed supports and recessing box in extruded anodized aluminium housing with high corrosion resistance. Toughened glass diffuser 15 mm thick. Luminaire supplied with cable and connector. Maximum weight 500 Kg. Fixing base and aluminium recessing box included.

PATENTED


PROTECTION CLASS  
IP65 / IP67

ISOLATION CLASS  
CLASS III 

MECHANICAL RESISTANCE  
IK 10

Power supply not included

### RECESSING BOX FINISHING


 .13 Anodized Aluminium



[www.simes.it/continuous-line](http://www.simes.it/continuous-line)




3000K



**S.7018W** 1,0m length - Diffused beam  
LED MODULE 3000K CRI90 737lm 9,6W  
24Vdc PWM


Requires constant voltage 24Vdc  
remote power supply (page 522-523)



**S.7023W** 1,5m length - Diffused beam  
LED MODULE 3000K CRI90 1105lm 14,4W  
24Vdc PWM


Requires constant voltage 24Vdc  
remote power supply (page 522-523)

TUNABLE WHITE  
(2700-4000K)



**S.7018T** 1,0m length - Diffused beam  
LED MODULE TUNABLE WHITE 2700K-4000K CRI80 715lm 12W  
24Vdc PWM


Requires constant voltage remote power supply for TUNABLE WHITE  
and DMX or DALI controllers (page 526-527)



**S.7023T** 1,5m length - Diffused beam  
LED MODULE TUNABLE WHITE 2700K-4000K CRI80 1072lm 18W  
24Vdc PWM


Requires constant voltage remote power supply for TUNABLE WHITE  
and DMX or DALI controllers (page 526-527)

RGBW  
(W 2700K)




**S.7019** 1,0m length - Diffused beam  
LED MODULE RGBW (W=2700K) 215lm 14,4W  
24Vdc PWM

Requires constant voltage remote power supply  
for RGBW and DMX or DALI controllers (page 528-529)




**S.7024** 1,5m length - Diffused beam  
LED MODULE RGBW (W=2700K) 322lm 21,6W  
24Vdc PWM

Requires constant voltage remote power supply  
for RGBW and DMX or DALI controllers (page 528-529)

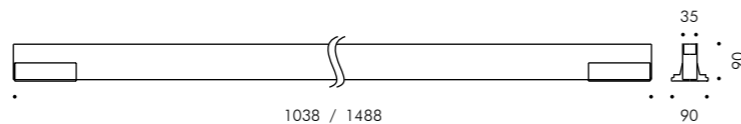


3000K



**S.7008W** 1,0m length  
LED MODULE 3000K CRI90 737lm 9,6W  
24Vdc PWM


Requires constant voltage 24Vdc  
remote power supply (page 522-523)



**S.7013W** 1,5m length  
LED MODULE 3000K CRI90 1105lm 14,4W  
24Vdc PWM


Requires constant voltage 24Vdc  
remote power supply (page 522-523)

TUNABLE WHITE  
(2700-4000K)



**S.7008T** 1,0m length  
LED MODULE TUNABLE WHITE 2700K-4000K CRI80 715lm 12W  
24Vdc PWM


Requires constant voltage remote power supply for TUNABLE WHITE  
and DMX or DALI controllers (page 526-527)



**S.7013T** 1,5m length  
LED MODULE TUNABLE WHITE 2700K-4000K CRI80 1072lm 18W  
24Vdc PWM


Requires constant voltage remote power supply for TUNABLE WHITE  
and DMX or DALI controllers (page 526-527)

RGBW  
(W 2700K)



**S.7009** 1,0m length  
LED MODULE RGBW (W=2700K) 215lm 14,4W  
24Vdc PWM

Requires constant voltage remote power supply  
for RGBW and DMX or DALI controllers (page 528-529)



**S.7014** 1,5m length  
LED MODULE RGBW (W=2700K) 322lm 21,6W  
24Vdc PWM

Requires constant voltage remote power supply  
for RGBW and DMX or DALI controllers (page 528-529)

