
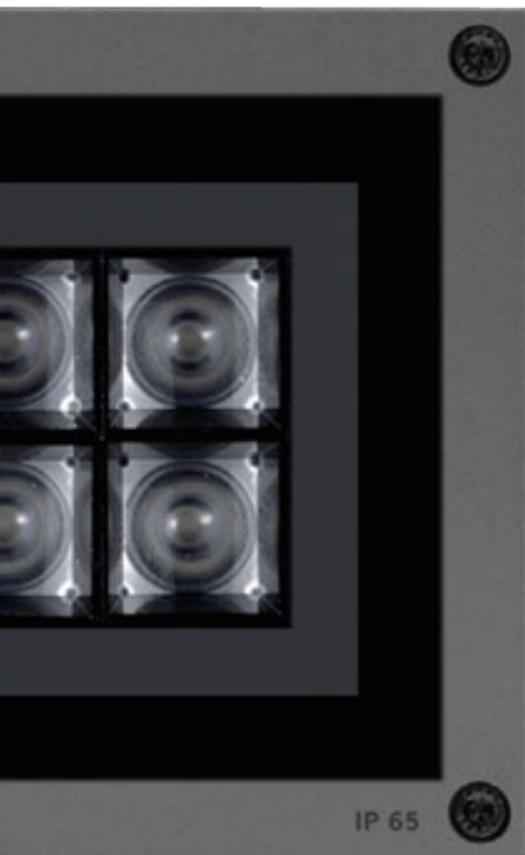


LOFT Wall and ceiling mounted

SIMES

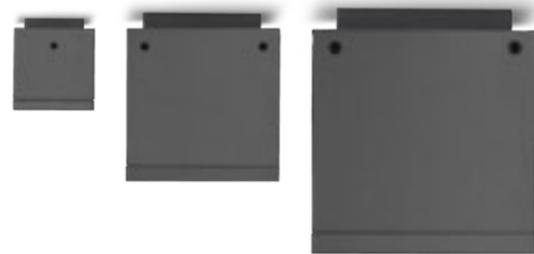

LOFT

Loft is a wide range of square and round single-emission wall product. The square version is also available as ceiling mounted. Those are all offered in three sizes and are equipped with comfort and tilting optics that make them suitable for the most varied contexts, from private to public, from classic to modern.

TECHNICAL DESCRIPTION

Die-cast aluminium housing with high corrosion resistance. Stainless steel A4 screws. Clear toughened glass diffuser. Silicone gaskets. Double powder paint.

MICROLOFT

Luminaire supplied with 5,0m neoprene H05RN-F cable.

MINILOFT AND LOFT

Luminaire with one single cable entry and grommet.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I Ⓢ


MECHANICAL RESISTANCE
IK 06

COLOURS

.01 White



.14 Aluminium Grey

.24 Anthracite Grey

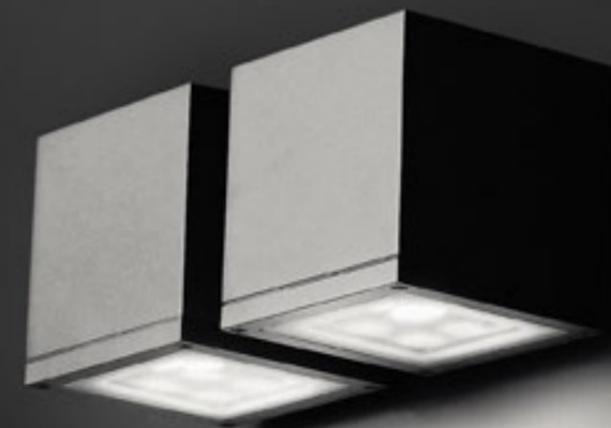

www.simes.it/loft



Microloft Square



S.6615W Flood beam with lens
 LED MODULE **3000K** CRI90 260lm 2,2W
 (on request 2700K CRI90 240lm, 4000K CRI80 320lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable
 Fixed LED position

Beam lenses available on request with no surcharge:
9°, 22°, 63°, 10°x44°



Microloft Square



S.6625W Elliptical beam with lens
 LED MODULE **3000K** CRI90 260lm 2,2W
 (on request 2700K CRI90 240lm)
 (on request 4000K CRI80 320lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable
 Fixed LED position

Beam lenses available on request with no surcharge:
9°, 22°, 38°, 63°



Miniloft Square




S.6646W Flood beam with lenses
 LED MODULE **3000K** CRI90 774lm 6,2W
 (on request 2700K CRI90 714lm, 4000K CRI80 952lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable
 Adjustable ±15° optic

Beam lenses available on request with no surcharge:
12°, 63°, 10°x44°

Miniloft Square





S.6655W Spot beam with lenses
 LED MODULE **3000K** CRI90 774lm 6,2W
 (on request 2700K CRI90 714lm)
 (on request 4000K CRI80 952lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable
 Adjustable ±15° optic



S.6618W Flood beam with lenses
 LED MODULE **3000K** CRI90 774lm 6,2W
 (on request 2700K CRI90 714lm)
 (on request 4000K CRI80 952lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable
 Adjustable ±15° optic

Beam lenses available on request with no surcharge:
63°, 10°x44°



Loft Square




S.6675W Flood beam with lenses
 LED MODULE **3000K** CRI90 2340lm 19,5W
 (on request 2700K CRI90 2160lm, 4000K CRI80 2880lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
 Adjustable ±15° optic

Beam lenses available on request with no surcharge:
12°, 63° and 10°x44°

Loft Square





S.6695W Spot beam with lenses
 LED MODULE **3000K** CRI90 2340lm 19,5W
 (on request 2700K CRI90 2160lm)
 (on request 4000K CRI80 2880lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
 Adjustable ±15° optic



S.6678W Flood beam with lenses
 LED MODULE **3000K** CRI90 2340lm 19,5W
 (on request 2700K CRI90 2160lm)
 (on request 4000K CRI80 2880lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
 Adjustable ±15° optic

Beam lenses available on request with no surcharge:
63°, 10°x44°



Microloft Round




S.6622W Elliptical beam with lens
 LED MODULE **3000K** CRI90 260lm 2,2W
 (on request 2700K CRI90 240lm)
 (on request 4000K CRI80 320lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable
 Fixed LED position

Beam lenses available on request with no surcharge:
9°, 22°, 38°, 63°

Miniloft Round





S.6658W Spot beam with lenses
 LED MODULE **3000K** CRI90 774lm 6,2W
 (on request 2700K CRI90 714lm)
 (on request 4000K CRI80 952lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable
 Adjustable $\pm 15^\circ$ optic




S.6628W Flood beam with lenses
 LED MODULE **3000K** CRI90 774lm 6,2W
 (on request 2700K CRI90 714lm)
 (on request 4000K CRI80 952lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable
 Adjustable $\pm 15^\circ$ optic

Beam lenses available on request with no surcharge:
63°, 10°x44°

Loft Round



S.6689W Spot beam with lenses
 LED MODULE **3000K** CRI90 2340lm 19,5W
 (on request 2700K CRI90 2160lm)
 (on request 4000K CRI80 2880lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
 Adjustable $\pm 15^\circ$ optic



S.6680W Flood beam with lenses
 LED MODULE **3000K** CRI90 2340lm 19,5W
 (on request 2700K CRI90 2160lm)
 (on request 4000K CRI80 2880lm)
 220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH
 Adjustable $\pm 15^\circ$ optic

Beam lenses available on request with no surcharge:
63°, 10°x44°



Palace music hall, Thessaloniki, Greece © Gravani Lighting