





Minislot disk

Urban lighting

MINISLOT DISK is a post top luminaire with indirect light beam that emits a very uniform light distribution at 360°. Glare-free effects with excellent visual comfort and with louvre are its main features. MINISLOT DISK blends in different architectural styles, from classic to modern, thanks to its clean design.

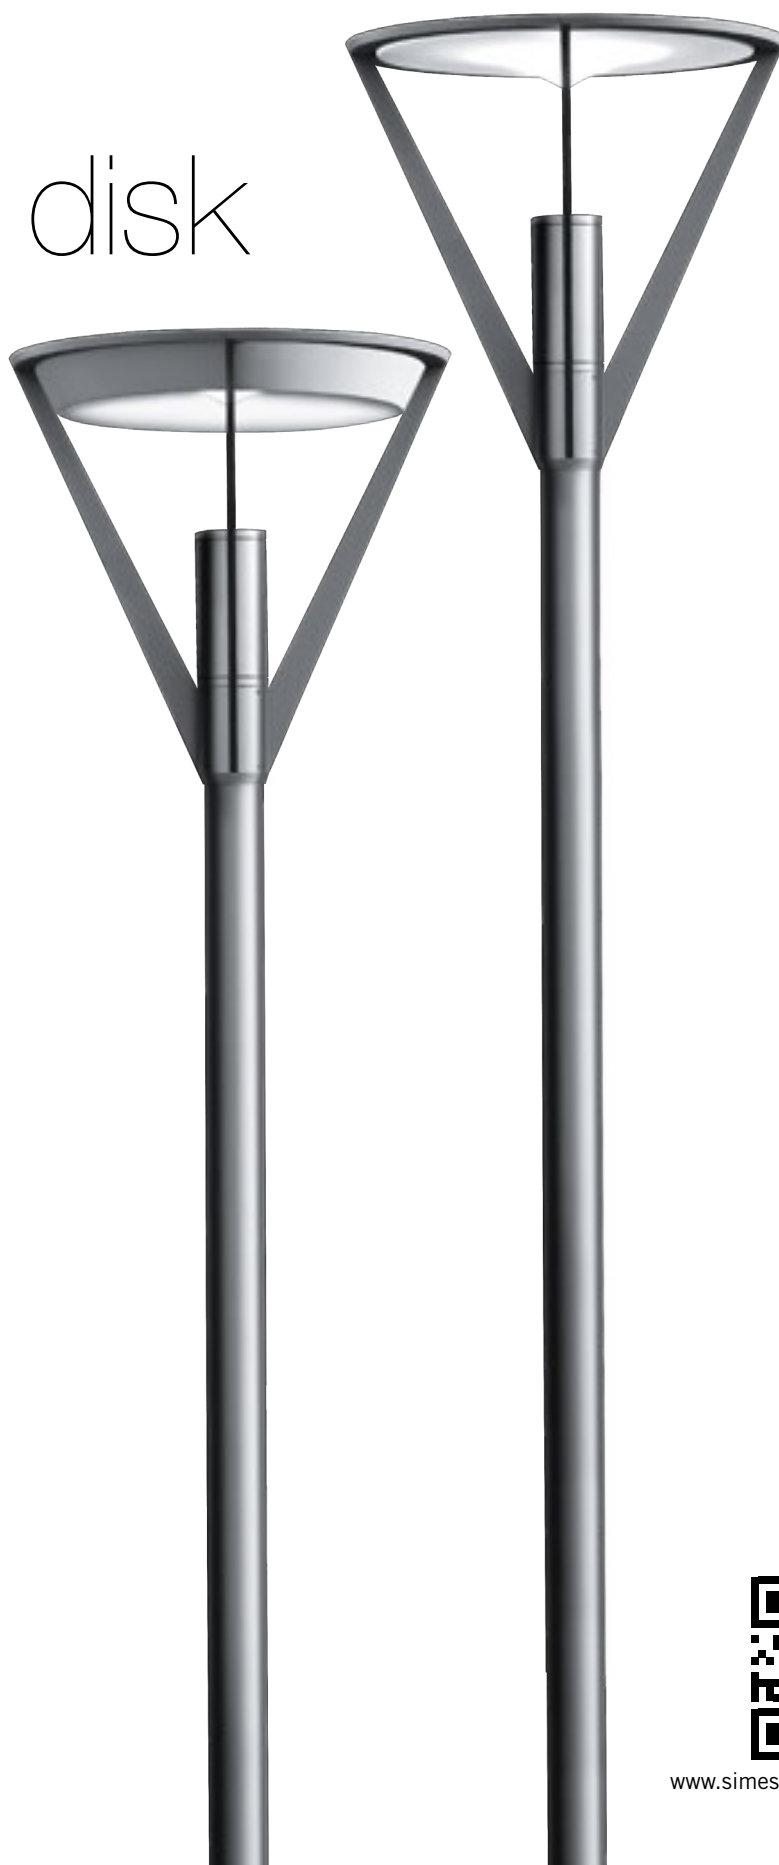



Palace music hall, Thessaloniki, Greece © Gravani Lighting

MINISLOT DISK Urban lighting

Die-cast EN AB-47100 and extruded EN AW-6060 aluminium housing with high corrosion resistance.

Reflector in polymers covered with 99.98% pure aluminium.

Clear toughened glass 8 mm thick.

Stainless steel screws.

Luminaire hard wired with single neoprene cable with cable gland.

Silicone gaskets.

Double powder paint.

POLE CONNECTION:

Pole head in painted aluminium with Ø 120 mm connection.


DIFFUSER:

Diffuser with involute omnidirectional distribution for indirect light in fibre glass.

Protection class

IP65

Isolation class


CLASS II 

Mechanical resistance

IK 08

Leds 3000K CR190 versions are available on request.


Integral ballast to allow an automatic power and flux reduction without the need of any external control systems available on request with surcharge.



S.2809

POLE BASE COVER

For pole with base and pole to be buried Ø102mm or Ø120mm. Die-cast aluminium housing.



S.2840

PLANTED ROOT for pole S.2846

h = 470 mm and bolts in galvanized steel with M16 threads.





S.2499


SURGE PROTECTION DEVICE 10kV

Surge protection devices are utilised to limit the damage of such electrical disturbances (temporary, transitional or permanent). Each fixture must be connected to one single device at a distance of no more than 10m away.


Colours:

-  Aluminium grey (code 14)
-  Anthracite grey (code 24)

For the latest technical information and luminaire updates with LED technology please refer to www.simes.it


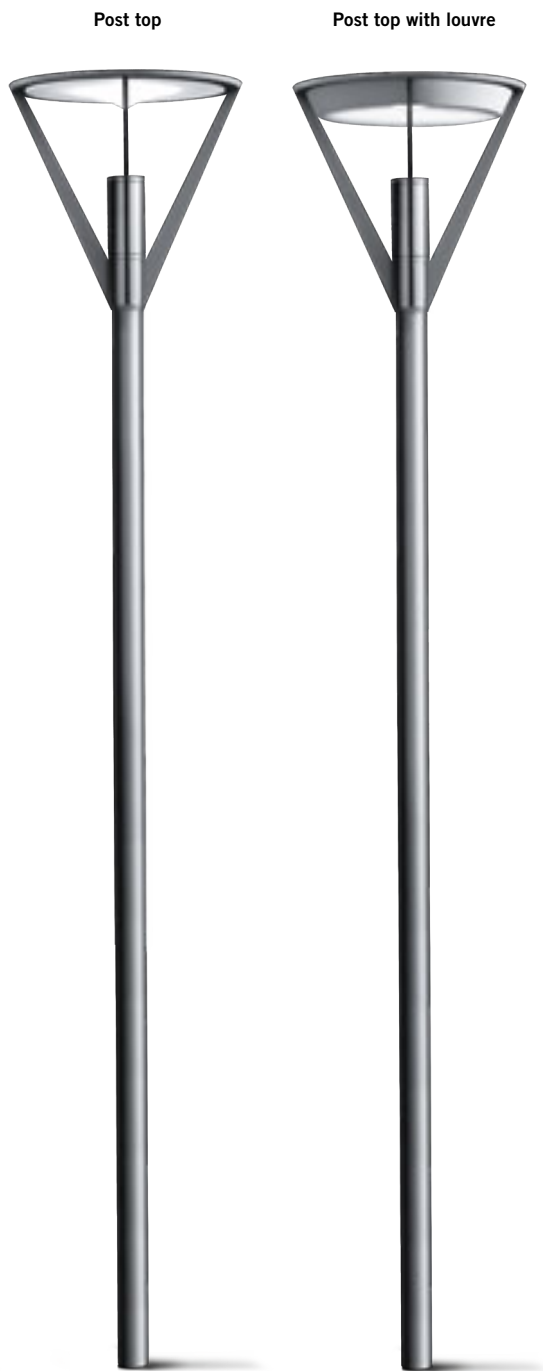


Post top ø 120 mm




S.3994N

1 COB LED **4000K** CRI90 5800lm
 Rated luminaire luminous flux 2720lm
 Rated input power 50W
 220V-240V AC 50/60Hz / DC Not Dimmable
Pole not included






Post top ø 120 mm with louvre



S.3993N

1 COB LED **4000K** CRI90 5800lm
 Rated luminaire luminous flux 2518lm
 Rated input power 50W
 220V-240V AC 50/60Hz / DC Not Dimmable
Pole not included

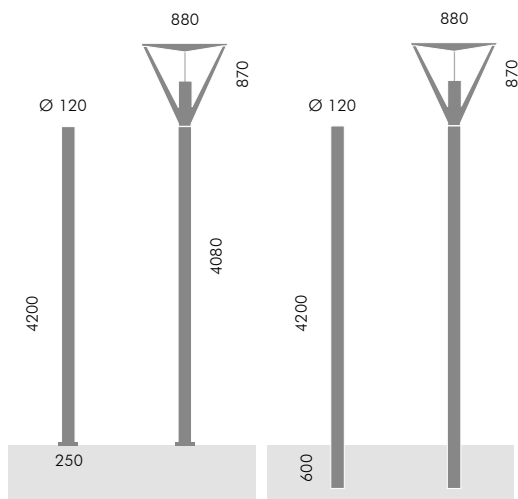

S.2846

S.2826

Poles

S.2846

Ø 120 mm CYLINDRICAL POLE WITH BASE

Pole total height 4200mm
 Finished luminaire total height above ground 4950mm

S.2826

Ø 120 mm CYLINDRICAL POLE TO BE BURIED

Pole total height 4800mm
 To be buried for 600mm
 Finished luminaire total height above ground 4950mm