



Design K.Begasse

Outline is a spotlight with minimalist design. It expresses the "solids and voids" concept of Simes, designed to minimize the visual impact of the product in favor of the architecture. Outline is available with various optics: Spot 10° and Flood 29° for ground, wall and pole applications. Outline is also offered with a Very Wide optic 91° x 116° for wall and pole application to illuminate wide areas, parks, squares and parking places.

**TECHNICAL DESCRIPTION**  
Die-cast aluminium housing with high corrosion resistance. Stainless steel A4 screws. Clear toughened glass diffuser 5mm thick. HI-GRADE aluminium reflectors for Outline Flood. Concentrating or diffusing lenses for Outline Spot. Luminaire supplied with neoprene H05RN-F cable and connector in the base. Silicone gaskets. Double powder paint.

**PROTECTION CLASS**  
IP65

**ISOLATION CLASS**  
CLASS I Ⓢ

**MECHANICAL RESISTANCE**  
IK 08



**REGISTERED DESIGN**



**COLOURS**

.14 Aluminium Grey


.24 Anthracite Grey



[www.simes.it/outline](http://www.simes.it/outline)

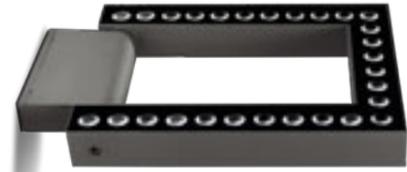


**S.3100W Spot beam with lenses**  
 LED MODULE 3000K CRI90 6720lm 54,9W  
 (on request 2700K CRI90 6384lm)  
 (on request 4000K CRI80 8372lm)  
 220V-240Vac 50/60Hz  
 ON/OFF Not Dimmable




**S.3101W Medium beam with lenses**  
 LED MODULE 3000K CRI90 6720lm 54,9W  
 (on request 2700K CRI90 6384lm)  
 (on request 4000K CRI80 8372lm)  
 220V-240Vac 50/60Hz  
 ON/OFF Not Dimmable

Beam lenses available on request with no surcharge: 42°



**S.3105W Very Wide Flood beam with reflector**  
 LED MODULE 3000K CRI90 5600lm 42W  
 (on request 2700K CRI90 5320lm)  
 (on request 4000K CRI80 6975lm)  
 220V-240Vac 50/60Hz  
 ON/OFF Not Dimmable




**Accessory**



**S.3079 STAKE FOR OUTLINE**  
 In polypropylene  
 Colour: black (code .09)




**S.2843**  
**Ø 60mm CYLINDRICAL POLE WITH BASE**  
 Pole total height 3500mm

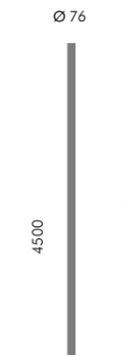

**S.2845**  
**Ø 76mm CYLINDRICAL POLE WITH BASE**  
 Pole total height 4500mm  
 Provided with inspection door




**S.2842**  
**Ø 60mm CYLINDRICAL POLE TO BE BURIED**  
 Pole total height 4000mm  
 To be buried for 500mm

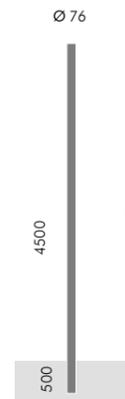

**S.2844**  
**Ø 76mm CYLINDRICAL POLE TO BE BURIED**  
 Pole total height 5000mm  
 To be buried for 500mm  
 Provided with inspection door

Outline can be installed on the pole using the fixation accessory.

**S.3044**  
**ACCESSORY SINGLE POLE MOUNTED Ø 60-76mm**  
 For 1 Outline



**S.3045**  
**ACCESSORY DOUBLE POLE MOUNTED Ø 60-76mm**  
 For 2 Outline



**S.2849**  
**PLANTED ROOT**  
 h=470mm and bolts in galvanized steel with M16 threads for S.2843 / S.2845



**S.2809**  
**POLE BASE COVER**  
 For pole with base and pole to be buried Ø102mm or Ø121mm.  
 Die-cast aluminium housing.



**ON REQUEST ADAPTOR**  
 For cylindrical poles Ø 60mm / Ø 76mm for S.2809 pole base cover



