



Plafoniere

The well known PLAFONIERA bulkhead, solid and with classical design, features the newest technologies applied to the traditional lighting sources.





PLAFONIERE

Die-cast EN AB-47100 aluminium housing with high corrosion resistance.
Aluminium reflector.
Sand blasted glass diffuser.
Stainless steel screws.
Luminaire suitable for double grommets.
Double powdered paint.

Protection class
IP54

Isolation class
CLASS I ⊕


Lamp TC not included.

Colours:


- White (code 01)
- Black (code 09)
- Aluminium (code 14)
(Only for PLAFONIERE BUL VERSION)

*For the latest technical information
and product updates with LED
technology please refer to the official
website (www.simes.it)*


Round with ring




S.185 
 For lamp TC-DEL 10W G24q-1 600lm
 Rated luminaire luminous flux 312lm
 Rated input power 15W




Round with cage




S.185/G 
 For lamp TC-DEL 10W G24q-1 600lm
 Rated luminaire luminous flux 312lm
 Rated input power 15W




Round with ring




S.389 
 For lamp TC-DEL 18W G24q-2 1200lm
 Rated luminaire luminous flux 588lm
 Rated input power 22W




Round with cage




S.399/G 
 For lamp TC-DEL 18W G24q-2 1200lm
 Rated luminaire luminous flux 588lm
 Rated input power 22W




Oval with ring




S.145 
 For lamp TC-DEL 13W G24q-1 900lm
 Rated luminaire luminous flux 477lm
 Rated input power 17W

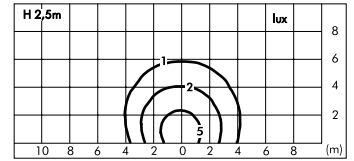


Oval with cage




S.145/G 
 For lamp TC-DEL 13W G24q-1 900lm
 Rated luminaire luminous flux 477lm
 Rated input power 17W

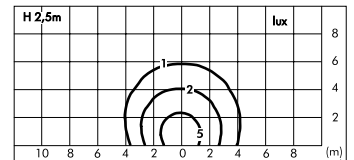


Oval with ring




S.349 
 For lamp TC-DEL 18W G24q-2 1200lm
 Rated luminaire luminous flux 540lm
 Rated input power 22W

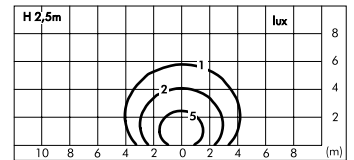


Oval with cage



S.359/G 
 For lamp TC-DEL 18W G24q-2 1200lm
 Rated luminaire luminous flux 516lm
 Rated input power 22W

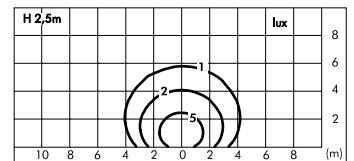


Oval with visor




S.255 

For lamp TC-DEL 13W G24q-1 900lm
 Rated luminaire luminous flux 315lm
 Rated input power 17W

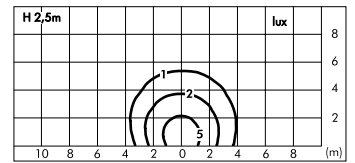


Oval with visor




S.659 


For lamp TC-DEL 18W G24q-2 1200lm
 Rated luminaire luminous flux 288lm
 Rated input power 22W

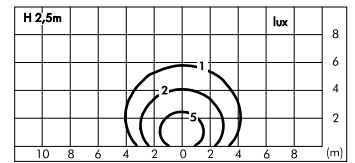


Round Bul with ring




S.6509 
 For lamp TC-DEL 10W G24q-1 600lm
 Rated luminaire luminous flux 258lm
 Rated input power 15W




Round Bul with visor




S.6529 
 For lamp TC-DEL 10W G24q-1 600lm
 Rated luminaire luminous flux 192lm
 Rated input power 15W



Round Bul with ring




S.6539 
 For lamp TC-DEL 18W G24q-2 1200lm
 Rated luminaire luminous flux 624lm
 Rated input power 22W



Round Bul with visor



S.6559 
 For lamp TC-DEL 18W G24q-2 1200lm
 Rated luminaire luminous flux 384lm
 Rated input power 22W





MARCO PIRELLI

PIRELLI