


PROIETTORI DA PALO Spotlight pole mounted



PROIETTORI Spotlight

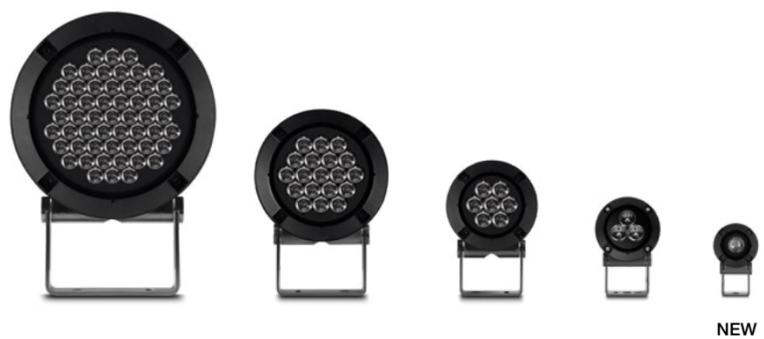

NEW







NANOPOINTER PROIETTORE

Nanopointer spotlight

SIMES



La famiglia Pointer, tra le più performanti e tecnologicamente avanzate del portfolio Simes, si arricchisce di una nuova versione miniaturizzata. Nanopointer è il proiettore più compatto della serie, progettato per applicazioni che richiedono ingombri minimi senza compromessi sulle prestazioni. In dimensioni estremamente ridotte concentra un'elevata qualità luminosa: monocromatico, con fascio superspot di serie, consente tramite filtri intercambiabili di ottenere diverse aperture e adattare con precisione l'emissione alle esigenze progettuali.

The Pointer family, one of the most high-performing and technologically advanced in the Simes portfolio, is expanded with a new miniaturized version. Nanopointer is the most compact projector in the series, designed for applications requiring minimal size without compromising performance. Despite its extremely small dimensions, it delivers high lighting quality: monochromatic, with a standard superspot beam, it can be fitted with interchangeable filters to achieve different beam spreads and precisely adapt the light output to project requirements.



POINTER - REGOLAZIONE DEL FASCIO LUMINOSO

Pointer - Beam adjustment

FILTRI INTERCAMBIABILI

Tutte le versioni di Pointer permettono di ottenere una notevole flessibilità luminosa tramite l'utilizzo di filtri intercambiabili in grado di modellare la forma e l'ampiezza del fascio. Il vano ottico, apribile con cerniera e viti anti perdita, consente un agevole sostituzione o aggiunta dei filtri. L'accessorio honeycomb schermo la sorgente nei casi in cui è richiesto massimo comfort visivo e si aggiunge anch'esso all'interno del vano ottico, in una posizione protetta tra la sorgente e il vetro di chiusura.

INTERCHANGEABLE FILTERS

All Pointer versions provide high lighting flexibility through interchangeable filters that shape the beam and control its spread. The optical compartment, hinged and fitted with captive screws, allows easy replacement or addition of filters. The honeycomb accessory shields the light source when maximum visual comfort is required and is installed inside the optical chamber in a protected position between the source and the closing glass.

DIGITAL BEAM

Oltre alla modellazione del fascio tramite filtri intercambiabili, la versione Nanopointer introduce una soluzione di nuova generazione: la tecnologia Digital Beam. Il sistema ottico a cristalli liquidi (LensVector™) permette di regolare da remoto l'ampiezza del fascio, adattando dinamicamente la luce al contesto applicativo.

DIGITAL BEAM

In addition to beam shaping through interchangeable filters, the Nanopointer version introduces a next-generation solution: Digital Beam technology. The liquid crystal optical system (LensVector™) allows remote adjustment of beam width, dynamically adapting the light to the application context.

Standard

Con filtro 30°
With filter 30°

Con filtro 60°
With filter 60°

Con filtro 60°x10°
With filter 60°x10°




POINTER

COMPOSIZIONE DEL CODICE Code composition			INFORMAZIONI GENERALI FAMIGLIA General range info			
CODICE Code	KELVIN	COLORE Colour	GRADO DI PROTEZIONE Protection class	CLASSE DI ISOLAMENTO Insulation class	RESISTENZA IMPATTO Mechanical resistance	MATERIALE Material
S.2780	H (2700K)	.24 Grigio Antracite Anthracite Grey	IP 66	CLASS II	IK 08 (Micropointer)	Alluminio verniciato Painted aluminium
	W(3000K)					
	N (4000K)					
				CLASS III (Nanopointer RGBW / TUNABLE W)	IK 09 (Minipointer e Pointer)	
					IK 10 (Megapointer)	

NANOPOINTER PROIETTORE

Nanopointer projector




CODE	BEAM	KELVIN	FLUX	POWER	POWER SUPPLY	DRIVER	DIMMING TYPE
S.2780	5°	H (2700K)	301lm	2,9W	24Vdc	remoted see page 70	PWM
		W (3000K)	331lm	2,9W	24Vdc		PWM
		N (4000K)	343lm	2,9W	24Vdc		PWM
S.2781	10°	H (2700K)	474lm	3,0W	24Vdc	remoted see page 70	PWM
		W (3000K)	508lm	3,0W	24Vdc		PWM
		N (4000K)	541lm	3,0W	24Vdc		PWM

ACCESSORI PER NANOPOINTER Accessories for Nanopointer

- S.2790** Filtro fascio medio 30° per Nanopointer Medium beam filter 30° for Nanopointer
- S.2791** Filtro fascio largo 60° per Nanopointer Wide beam filter 60° for Nanopointer
- S.2792** Filtro fascio ellittico 60°x10° per Nanopointer Elliptical beam filter 60°x10° for Nanopointer
- S.2799** Honeycomb per Nanopointer Honeycomb for Nanopointer
- S.2797** Visiera per Nanopointer Visiera for Nanopointer
- S.2776** Picchetto per Nanopointer Stake for Nanopointer
- S.1019** Collare per installazione a palo per Nanopointer (palo Ø60 mm) Bracket for pole installation for Nanopointer (pole Ø60 mm)

MICROPOINTER PROIETTORE

Micropointer projector



CODE	BEAM	KELVIN	FLUX	POWER	POWER SUPPLY	DRIVER	DIMMING TYPE
S.2760	5°	H (2700K)	603lm	6W	220-240Vac	included	DALI2/PUSH
		W (3000K)	663lm	6W	220-240Vac	included	DALI2/PUSH
		N (4000K)	687lm	6W	220-240Vac	included	DALI2/PUSH
S.2761	10°	H (2700K)	840lm	6.1W	220-240Vac	included	DALI2/PUSH
		W (3000K)	900lm	6.1W	220-240Vac	included	DALI2/PUSH
		N (4000K)	960lm	6.1W	220-240Vac	included	DALI2/PUSH


ACCESSORI PER MICROPOINTER Accessories for Micropointer

- S.2770** Filtro fascio medio 30° per Micropointer Medium beam filter 30° for Micropointer
- S.2771** Filtro fascio largo 60° per Micropointer Wide beam filter 60° for Micropointer
- S.2772** Filtro fascio ellittico 60°x10° per Micropointer Elliptical beam filter 60°x10° for Micropointer
- S.2779** Honeycomb per Micropointer Honeycomb for Micropointer
- S.2777** Visiera per Micropointer Visiera for Micropointer
- S.2778** Snooth per Micropointer Snooth for Micropointer
- S.2776** Picchetto per Micropointer Stake for Micropointer
- S.1084** Collare per installazione a palo per Micropointer (palo Ø60 mm) Bracket for pole installation for Micropointer (pole Ø60 mm)
- S.1085** Collare per installazione a palo per Micropointer (palo Ø76 mm) Bracket for pole installation for Micropointer (pole Ø76 mm)

POINTER

MINIPOINTER PROIETTORE

Minipointer projector



CODE	BEAM	KELVIN	FLUX	POWER	POWER SUPPLY	DRIVER	DIMMING TYPE
S.2700	5°	H (2700K)	1477lm	20.8W	220-240Vac	included	DALI2/PUSH
		W (3000K)	1575lm	20.8W	220-240Vac	included	DALI2/PUSH
		N (4000K)	1687lm	20.8W	220-240Vac	included	DALI2/PUSH
S.2701	9°	H (2700K)	2744lm	21.3W	220-240Vac	included	DALI2/PUSH
		W (3000K)	2940lm	21.3W	220-240Vac	included	DALI2/PUSH
		N (4000K)	3136lm	21.3W	220-240Vac	included	DALI2/PUSH
S.2705	10°-49°	H (2700K)	1292lm	12.8W	48Vdc	remoted see page 71	DALI
		W (3000K)	1360lm	12.8W	48Vdc		DALI
		N (4000K)	1428lm	12.8W	48Vdc		DALI
S.2701T	9°	Tunable White (2700K-4000K)		1838lm	9.6W	Max 1050mA	remoted see page 71
							PWM
S.2703J	6°	RGBW (W=3000K)	2047lm	18.9W	24Vdc	remoted see page 71	PWM


ACCESSORI PER MINIPOINTER Accessories for Minipointer

- S.2710** Filtro fascio medio 30° per Minipointer Medium beam filter 30° for Minipointer
- S.2711** Filtro fascio largo 60° per Minipointer Wide beam filter 60° for Minipointer
- S.2712** Filtro fascio ellittico 60°x10° per Minipointer Elliptical beam filter 60°x10° for Minipointer
- S.2719** Honeycomb per Minipointer Honeycomb for Minipointer
- S.2717** Visiera per Minipointer Visiera for Minipointer
- S.2718** Snooth per Minipointer Snooth for Minipointer
- S.1005** Picchetto per Minipointer Stake for Minipointer
- S.1084** Collare per installazione a palo per Minipointer (palo Ø60 mm) Bracket for pole installation for Minipointer (pole Ø60 mm)
- S.1085** Collare per installazione a palo per Minipointer (palo Ø76 mm) Bracket for pole installation for Minipointer (pole Ø76 mm)
- S.1018** Collare per installazione a palo per Minipointer (palo Ø102 mm) Bracket for pole installation for Minipointer (pole Ø102 mm)

POINTER

POINTER SLIM PROIETTORE

Pointer Slim projector




CODE	BEAM	KELVIN	FLUX	POWER	POWER SUPPLY	DRIVER	DIMMING TYPE
S.2728	4°	H (2700K)	2985lm	29.5W	220-240Vac	included	DALI2/PUSH
		W (3000K)	2985lm	29.5W	220-240Vac	included	DALI2/PUSH
		N (4000K)	2985lm	29.5W	220-240Vac	included	DALI2/PUSH
S.2729	10°	H (2700K)	4160lm	30.2W	220-240Vac	included	DALI2/PUSH
		W (3000K)	4457lm	30.2W	220-240Vac	included	DALI2/PUSH
		N (4000K)	4754lm	30.2W	220-240Vac	included	DALI2/PUSH

ACCESSORI PER POINTER SLIM Accessories for Pointer Slim

- S.2730 Filtro fascio medio 30° per Pointer Slim Medium beam filter 30° for Pointer Slim
- S.2731 Filtro fascio largo 60° per Pointer Slim Wide beam filter 60° for Pointer Slim
- S.2732 Filtro fascio ellittico 60°x10° per Pointer Slim Elliptical beam filter 60°x10° for Pointer Slim
- S.2739 Honeycomb per Pointer Slim Honeycomb for Pointer Slim
- S.2737 Visiera per Pointer Slim Visiera for Pointer Slim
- S.2738 Snooth per Pointer Slim Snooth for Pointer Slim
- S.1005 Picchetto per Pointer Slim Stake for Pointer Slim
- S.1085 Collare per installazione a palo per Pointer Slim (palo Ø76 mm) Bracket for pole installation for Pointer Slim (pole Ø76 mm)
- S.1018 Collare per installazione a palo per Pointer Slim (palo Ø102 mm) Bracket for pole installation for Pointer Slim (pole Ø102 mm)
- S.1239 Collare per installazione a palo per Pointer Slim (palo Ø120 mm) Bracket for pole installation for Pointer Slim (pole Ø120 mm)

POINTER PROIETTORE

Pointer projector



CODE	BEAM	KELVIN	FLUX	POWER	POWER SUPPLY	DRIVER	DIMMING TYPE
S.2720	4°	H (2700K)	5726lm	56.6W	220-240Vac	included	DALI2
		W (3000K)	5726lm	56.6W	220-240Vac	included	DALI2
		N (4000K)	6527lm	56.6W	220-240Vac	included	DALI2
S.2721	10°	H (2700K)	7980lm	57.9W	220-240Vac	included	DALI2
		W (3000K)	8550lm	57.9W	220-240Vac	included	DALI2
		N (4000K)	9120lm	57.9W	220-240Vac	included	DALI2
S.2721T	9°	Tunable White (2700K-4000K)	4432lm	28.5W	220-240Vac	included	DALI DT8; PUSH
S.2723J	6°	RGBW (W=3000K)	3184lm	29.4W	220-240Vac	included	DMX/RDM; PUSH


ACCESSORI PER POINTER Accessories for Pointer

- S.2730 Filtro fascio medio 30° per Pointer Medium beam filter 30° for Pointer
- S.2731 Filtro fascio largo 60° per Pointer Wide beam filter 60° for Pointer
- S.2732 Filtro fascio ellittico 60°x10° per Pointer Elliptical beam filter 60°x10° for Pointer
- S.2739 Honeycomb per per Pointer Honeycomb for Pointer
- S.2737 Visiera per Pointer Visiera for Pointer
- S.2738 Snooth per Pointer Snooth for Pointer
- S.1005 Picchetto per Pointer Stake for Pointer
- S.1085 Collare per installazione a palo per Pointer (palo Ø76 mm) Bracket for pole installation for Pointer (pole Ø76 mm)
- S.1018 Collare per installazione a palo per Pointer (palo Ø102 mm) Bracket for pole installation for Pointer (pole Ø102 mm)
- S.1239 Collare per installazione a palo per Pointer (palo Ø120 mm) Bracket for pole installation for Pointer (pole Ø120 mm)

POINTER

MEGAPOINTER PROIETTORE

Megapointer projector



CODE	BEAM	KELVIN	FLUX	POWER	POWER SUPPLY	DRIVER	DIMMING TYPE
S.2740	4°	H (2700K)	11050lm	109.3W	220-240Vac	included	DALI2/PUSH
		W (3000K)	11050lm	109.3W	220-240Vac	included	DALI2/PUSH
		N (4000K)	11050lm	109.3W	220-240Vac	included	DALI2/PUSH
S.2741	9°	H (2700K)	19800lm	143.6W	220-240Vac	included	DALI2/PUSH
		W (3000K)	21214lm	143.6W	220-240Vac	included	DALI2/PUSH
		N (4000K)	22629lm	143.6W	220-240Vac	included	DALI2/PUSH
S.2741T	9°	Tunable White (2700K-4000K)	12802lm	82W	220-240Vac	included	DALI DT8
S.2743J	6°	RGBW (W=3000K)	13304lm	122.9W	220-240Vac	included	DMX / RDM

ACCESSORI PER MEGAPOINTER Accessories for Megapointer

- S.2750 Filtro fascio medio 30° per Megapointer Medium beam filter 30° for Megapointer
- S.2751 Filtro fascio largo 60° per Megapointer Wide beam filter 60° for Megapointer
- S.2752 Filtro fascio ellittico 60°x10° per Megapointer Elliptical beam filter 60°x10° for Megapointer
- S.2759 Honeycomb per Megapointer Honeycomb for Megapointer
- S.2757 Visiera per Megapointer Visiera for Megapointer
- S.2758 Snooth per Megapointer Snooth for Megapointer
- S.1018 Collare per installazione a palo per Megapointer (palo Ø102 mm) Bracket for pole installation for Megapointer (pole Ø102mm)
- S.1239 Collare per installazione a palo per Megapointer (palo Ø120 mm) Bracket for pole installation for Megapointer (pole Ø120mm)

ALIMENTATORI REMOTI A TENSIONE COSTANTE 24Vdc

Remote power supply 24Vdc constant voltage

**INDIPENDENTE**
Independent

ACCESSORY	IP	POWER	POWER SUPPLY	DIMMING TYPE
S.3400	IP20	10W	24Vdc	on-off
S.2430	IP20	16W	24Vdc	on-off
S.2400	IP20	35W	24Vdc	on-off
S.2401	IP20	60W	24Vdc	on-off
S.2403	IP20	100W	24Vdc	on-off
S.3425	IP54	8W	24Vdc	on-off
S.2407	IP67	14,4W	24Vdc	on-off
S.2433	IP67	36W	24Vdc	on-off
S.2405	IP67	60W	24Vdc	on-off
S.2406	IP67	90W	24Vdc	on-off
S.2445	IP67	120W	24Vdc	on-off
S.2446	IP67	360W	24Vdc	on-off

BOX PROTETTO IP
IP rated Box

ACCESSORY	IP	POWER	POWER SUPPLY	DIMMING TYPE
S.3401	IP55	10W	24Vdc	on-off
S.2435	IP67	16W	24Vdc	on-off
S.2402	IP55	60W	24Vdc	on-off
S.2404	IP55	90W	24Vdc	on-off
S.3664	IP65	35W	24Vdc	on-off
S.3665	IP65	90W	24Vdc	on-off

**INDIPENDENTE**
Independent

ACCESSORY	IP	POWER	POWER SUPPLY	DIMMING TYPE
S.3426	IP20	16W	24Vdc	DALI2
S.2441	IP20	24W	24Vdc	DALI, PUSH DIM, 0-10V
S.2419	IP20	35W	24Vdc	DALI, PUSH DIM, 0-10V
S.2429	IP20	60W	24Vdc	DALI, PUSH DIM, 0-10V
S.2424	IP20	60W	24Vdc	PUSH DIM, 0-10V
S.2442	IP20	75W	24Vdc	DALI2, PUSH DIM, 0-10V
S.2449	IP20	100W	24Vdc	DALI2, PUSH DIM, 0-10V
S.2411	IP68	15W	24Vdc	0-10V, 1-10V
S.2427	IP67	60W	24Vdc	1-10V
S.2428	IP67	90W	24Vdc	1-10V
S.2415	IP67	24W	24Vdc	DALI
S.2416	IP67	75W	24Vdc	DALI
S.2426	IP67	120W	24Vdc	DALI2
S.2419	IP67	36W	24Vdc	DALI2
S.2429	IP67	75W	24Vdc	DALI2
S.2449	IP67	100W	24Vdc	DALI2
S.2447	IP67	200W	24Vdc	DALI2

BOX PROTETTO IP
IP rated Box

ACCESSORY	IP	POWER	POWER SUPPLY	DIMMING TYPE
S.2438	IP67	16W	24Vdc	DALI2
S.2439	IP67	20W	24Vdc	PUSH DIM, 1-10V
S.2423	IP55	60W	24Vdc	DALI2, PUSH DIM, 1-10V
S.2425	IP55	90W	24Vdc	DALI2, PUSH DIM, 1-10V

ALIMENTATORE REMOTO A TENSIONE COSTANTE 48Vdc (DIGITAL BEAM)

Remote power supply 48Vdc constant voltage (Digital Beam)

**INDIPENDENTE**
Independent

ACCESSORY	IP	POWER	POWER SUPPLY	DIMMING TYPE
S.2448	IP67	31W	48Vdc	on-off

ALIMENTATORE REMOTO A CORRENTE COSTANTE (TUNABLE WHITE DALI)

Remote power supply constant current (Tunable White DALI)

**BOX PROTETTO IP**
IP rated Box

ACCESSORY	IP	POWER	POWER SUPPLY	DIMMING TYPE
S.3414	IP67	44,1W	1050mA	DALI DT-8

ALIMENTATORI REMOTI A TENSIONE COSTANTE 24Vdc (RGBW DMX)

Remot power supply 24Vdc constant voltage (RGBW DMX)

**BOX PROTETTO IP**
IP rated Box

ACCESSORY	IP	POWER	POWER SUPPLY	DIMMING TYPE
S.3411	IP55	60W	24Vdc	DMX
S.3413	IP55	90W	24Vdc	DMX
S.2440	IP55	320W	24Vdc	DMX