




Poster is the right solution to enlighten with elegance landscape and urban areas. Its thin triangular geometrical shape ensures an extremely light aspect despite its high mechanical resistance. The lighting source is recessed in the upper part of the structure and it is an integral part of the design. Poster is available in two powers and sizes suitable for 60mm and 76mm diameter poles. It can also be used as retrofit solution to substitute obsolete light fittings on existing poles.

TECHNICAL DESCRIPTION
Die-cast aluminium housing with high corrosion resistance. Clear toughened glass 6mm thick. Stainless steel A4 screws. Luminaire supplied with neoprene H05RN-F cable. Double powder paint.

REGISTERED DESIGN


PROTECTION CLASS
IP65


ISOLATION CLASS
CLASS II 

MECHANICAL RESISTANCE
IK 07



COLOURS


 .14 Aluminium Grey

 .24 Anthracite Grey




www.simes.it/poster

Miniposter post top




S.7045N
LED MODULE 4000K CRI80 5334lm 24,3W
(on request 2700K CRI80 4407lm)
(on request 3000K CRI80 4639lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



Pole not included
Version with DALI 2 power supply
available on request with surcharge.




Accessory



S.7049
ASYMMETRIC SHIELD FOR MINIPOSTER
Black painted steel shield to be mounted when
an asymmetric light distribution is required
from the Miniposter pole top.


Poles for Miniposter



S.2800 S.2801


S.2800
Ø 60mm CYLINDRICAL POLE TO BE BURIED
Pole total height 3000mm
To be buried for 500mm
Finished luminaire total height above ground 3065mm

S.2801
Ø 60mm CYLINDRICAL POLE WITH BASE
Pole total height 2500mm
Finished luminaire total height above ground 3065mm




S.2849
PLANTED ROOT
FOR Ø 60mm AND Ø 76mm
CYLINDRICAL POLE WITH BASE
h=470mm and bolts
in galvanized steel with M16 threads.

Poster post top




S.7050N
LED MODULE 4000K CRI80 10304lm 57,6W
(on request 2700K CRI80 8960lm)
(on request 3000K CRI80 8960lm)
220V-240Vac 50/60Hz
Dimmable DALI 2



Pole not included




Accessory



S.7059
ASYMMETRIC SHIELD FOR POSTER
Black painted steel shield to be mounted when
an asymmetric light distribution is required
from the Poster pole top.


Poles for Poster

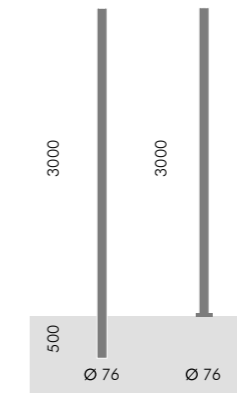

S.2812 S.2813

S.2812
Ø 76mm CYLINDRICAL POLE TO BE BURIED
Pole total height 3500mm
To be buried for 500mm
Finished luminaire total height above ground 3860mm
Provided with inspection door

S.2813
Ø 76mm CYLINDRICAL POLE WITH BASE
Pole total height 3000mm
Finished luminaire total height above ground 3860mm
Provided with inspection door



S.2849
PLANTED ROOT
FOR Ø 60mm AND Ø 76mm
CYLINDRICAL POLE WITH BASE
h=470mm and bolts
in galvanized steel with M16 threads.

