


EFFETTO A PARETE Wall effect


1 FINESTRA 1 window



2 FINESTRE 2 windows

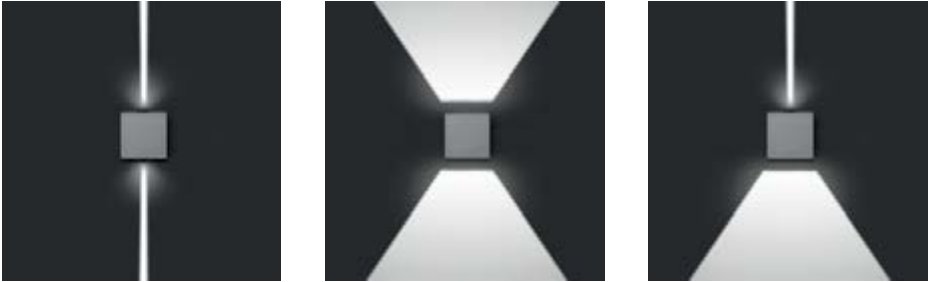

4 FINESTRE 4 windows

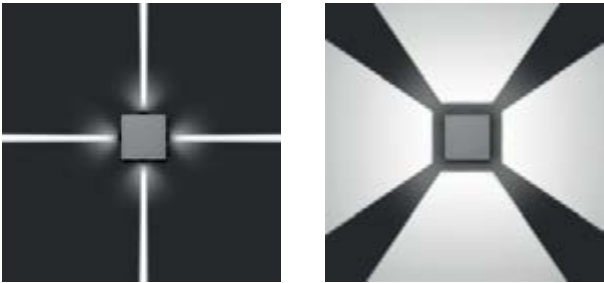

☑ 120 D.140 (Minilift)
☑ 180 D.205 (Lift)



DESCRIZIONE TECNICA Technical description	INFORMAZIONI GENERALI General information		CODICI COLORE Colour codes
Struttura in alluminio pressofuso. Riflettore realizzato con polimeri ricoperti in alluminio. Viti in acciaio con rivestimento anticorrosivo. Vetro trasparente temprato di protezione. Predisposto per cablaggio passante con passafilo. Die-cast aluminium housing. Reflector in polymers covered with aluminium. Steel screws with anticorrosive coating. Transparent protective toughened glass. Prepared for through-wiring with cable gland.	GRADO DI PROTEZIONE IP rating	IP65	.09 Nero Black .14 Grigio alluminio Aluminium Grey
	CLASSE DI ISOLAMENTO Insulation class	CLASS I ⚡ (Lift)	
		CLASS II Ⓜ (Minilift)	
	RESISTENZA IMPATTO Mechanical resistance	IK 06	

EFFETTO A PARETE ☒ 120

Wall effect ☒ 120

MINILIFT ☒ 120

	CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
	S.5067H	2700 K	1 fascio stretto 1 spot beam		80	23 lm	4.0 W	220-240 Vac	ON-OFF
	S.5067W	3000 K			80	27 lm	4.0 W	220-240 Vac	ON-OFF
	S.5067N	4000 K			80	28 lm	4.0 W	220-240 Vac	ON-OFF
	S.5077H	2700 K	1 fascio largo 1 wide beam		80	43 lm	4.0 W	220-240 Vac	ON-OFF
	S.5077W	3000 K			80	51 lm	4.0 W	220-240 Vac	ON-OFF
	S.5077N	4000 K			80	53 lm	4.0 W	220-240 Vac	ON-OFF
	S.5047H	2700 K	2 fasci stretti 2 spot beams		80	45 lm	5.5 W	220-240 Vac	ON-OFF
	S.5047W	3000 K			80	53 lm	5.5 W	220-240 Vac	ON-OFF
	S.5047N	4000 K			80	55 lm	5.5 W	220-240 Vac	ON-OFF
	S.5027H	2700 K	2 fasci larghi 2 wide beams		80	86 lm	5.5 W	220-240 Vac	ON-OFF
	S.5027W	3000 K			80	101 lm	5.5 W	220-240 Vac	ON-OFF
	S.5027N	4000 K			80	105 lm	5.5 W	220-240 Vac	ON-OFF
	S.5037H	2700 K	1 fascio largo + 1 fascio stretto 1 wide beam + 1 spot beam		80	65 lm	5.5 W	220-240 Vac	ON-OFF
	S.5037W	3000 K			80	77 lm	5.5 W	220-240 Vac	ON-OFF
	S.5037N	4000 K			80	80 lm	5.5 W	220-240 Vac	ON-OFF
	S.5087H	2700 K	4 fasci stretti 4 spot beams		80	90 lm	9.5 W	220-240 Vac	ON-OFF
	S.5087W	3000 K			80	106 lm	9.5 W	220-240 Vac	ON-OFF
	S.5087N	4000 K			80	110 lm	9.5 W	220-240 Vac	ON-OFF
	S.5097H	2700 K	4 fasci larghi 4 wide beams		80	171 lm	9.5 W	220-240 Vac	ON-OFF
	S.5097W	3000 K			80	202 lm	9.5 W	220-240 Vac	ON-OFF
	S.5097N	4000 K			80	210 lm	9.5 W	220-240 Vac	ON-OFF

EFFETTO A PARETE ☒ 180

Wall effect ☒ 180

LIFT ☒ 180

	CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
	S.5075H	2700 K	1 fascio stretto 1 spot beam		90	116 lm	15.5 W	220-240 Vac	ON-OFF
	S.5075W	3000 K			90	125 lm	15.5 W	220-240 Vac	ON-OFF
	S.5075N	4000 K			90	136 lm	15.5 W	220-240 Vac	ON-OFF
	S.5070H	2700 K	1 fascio largo 1 wide beam		90	215 lm	15.5 W	220-240 Vac	ON-OFF
	S.5070W	3000 K			90	231 lm	15.5 W	220-240 Vac	ON-OFF
	S.5070N	4000 K			90	252 lm	15.5 W	220-240 Vac	ON-OFF
	S.5040H	2700 K	2 fasci stretti 2 spot beams		90	232 lm	15.5 W	220-240 Vac	ON-OFF
	S.5040W	3000 K			90	250 lm	15.5 W	220-240 Vac	ON-OFF
	S.5040N	4000 K			90	272 lm	15.5 W	220-240 Vac	ON-OFF
	S.5026H	2700 K	2 fasci larghi 2 wide beams		90	430 lm	15.5 W	220-240 Vac	ON-OFF
	S.5026W	3000 K			90	463 lm	15.5 W	220-240 Vac	ON-OFF
	S.5026N	4000 K			90	505 lm	15.5 W	220-240 Vac	ON-OFF
	S.5033H	2700 K	1 fascio largo + 1 fascio stretto 1 wide beam + 1 spot beam		90	331 lm	15.5 W	220-240 Vac	ON-OFF
	S.5033W	3000 K			90	356 lm	15.5 W	220-240 Vac	ON-OFF
	S.5033N	4000 K			90	388 lm	15.5 W	220-240 Vac	ON-OFF
	S.5080H	2700 K	4 fasci stretti 4 spot beams		90	464 lm	15.5 W	220-240 Vac	ON-OFF
	S.5080W	3000 K			90	499 lm	15.5 W	220-240 Vac	ON-OFF
	S.5080N	4000 K			90	544 lm	15.5 W	220-240 Vac	ON-OFF
	S.5090H	2700 K	4 fasci larghi 4 wide beams		90	860 lm	15.5 W	220-240 Vac	ON-OFF
	S.5090W	3000 K			90	925 lm	15.5 W	220-240 Vac	ON-OFF
	S.5090N	4000 K			90	1008 lm	15.5 W	220-240 Vac	ON-OFF