

PROIETTORE DA PALO Spotlight pole mounted



PROIETTORE Spotlight

Ø 38



Ø 67 H.470



Ø 67 H.470



Ø 67 H.355



Ø 67 H.290

Ø 38



Ø 110 H.470




Ø 110 H.355



DESCRIZIONE TECNICA Technical description	INFORMAZIONI GENERALI General information		CODICI COLORE Colour codes
Struttura in alluminio pressofuso. Vetro trasparente temprato di protezione. Viti in acciaio con rivestimento anticorrosivo. Precablati con cavo. Die-cast aluminium housing. Transparent protective toughened glass. Steel screws with anticorrosive coating. Pre-wired luminaire.	GRADO DI PROTEZIONE IP rating	IP66	● .24 Grigio Antracite Anthracite grey Frangiluce frontale di colore nero (.09) Frontal baffle always black (.09)
	CLASSE DI ISOLAMENTO Insulation class	CLASS I ⚡ CLASS III ⚡ (Pivot 850mA / 24Vdc)	
	RESISTENZA IMPATTO Mechanical resistance	IK 07	
			BREVETTATO Patented MODELLO REGISTRATO Registered design

PROIETTORE (alimentatore remoto)
Spotlight (remote power supply)

PIVOT 4 LED H290

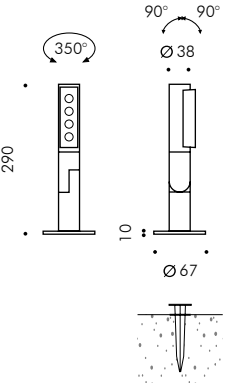


CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.1751H	2700 K	Fascio largo con 4 lenti Wide beam with 4 lenses		80	530 lm	10.3 W	Max 850 mA remote (p.555)	PWM
S.1751W	3000 K			80	625 lm	10.3 W	Max 850 mA remote (p.555)	PWM
S.1751N	4000 K			80	649 lm	10.3 W	Max 850 mA remote (p.555)	PWM

ACCESSORI PER PIVOT 4 LED Accessories for Pivot 4 LED

S.1752	Filtro fascio stretto 10° per Pivot 4 led	Spot beam 10° filter for Pivot 4 LED
S.1753	Filtro fascio diffuso 60° per Pivot 4 led	Flood beam 60° filter for Pivot 4 LED
S.1754	Filtro fascio ellittico 60°x1° per Pivot 4 led	Elliptical beam 60°x1° filter for Pivot 4 LED
S.1768	Picchetto per Pivot con alimentatore remoto	Spike for Pivot with remote power supply

PIVOT 7 LED H355

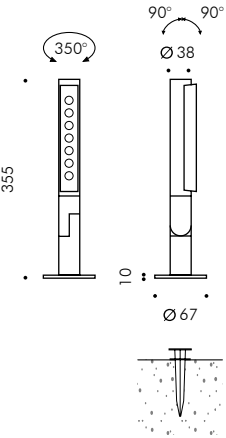


CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.1761H	2700 K	Fascio largo con 7 lenti Wide beam with 7 lenses		80	899 lm	18.6 W	Max 850 mA remote (p.555)	PWM
S.1761W	3000 K			80	1061 lm	18.6 W	Max 850 mA remote (p.555)	PWM
S.1761N	4000 K			80	1101 lm	18.6 W	Max 850 mA remote (p.555)	PWM

ACCESSORI PER PIVOT 7 LED Accessories for Pivot 7 LED

S.1762	Filtro fascio stretto 10° per Pivot 7 led	Spot beam 10° filter for Pivot 7 LED
S.1763	Filtro fascio diffuso 60° per Pivot 7 led	Flood beam 60° filter for Pivot 7 LED
S.1764	Filtro fascio ellittico 60°x1° per Pivot 7 led	Elliptical beam 60°x1° filter for Pivot 7 LED
S.1768	Picchetto per Pivot con alimentatore remoto	Spike for Pivot with remote power supply

PIVOT 12 LED H470

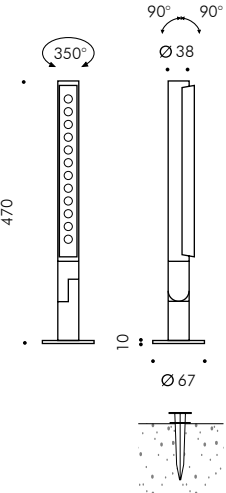


CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.1771H	2700 K	Fascio largo con 12 lenti Wide beam with 12 lenses		80	1598 lm	31.1 W	Max 850 mA remote (p.555)	PWM
S.1771W	3000 K			80	1885 lm	31.1 W	Max 850 mA remote (p.555)	PWM
S.1771N	4000 K			80	1957 lm	31.1 W	Max 850 mA remote (p.555)	PWM


ACCESSORI PER PIVOT 12 LED Accessories for Pivot 12 LED

S.1772	Filtro fascio stretto 10° per Pivot 12 led	Spot beam 10° filter for Pivot 12 LED
S.1773	Filtro fascio diffuso 60° per Pivot 12 led	Flood beam 60° filter for Pivot 12 LED
S.1774	Filtro fascio ellittico 60°x1° per Pivot 12 led	Elliptical beam 60°x1° filter for Pivot 12 LED
S.1768	Picchetto per Pivot con alimentatore remoto	Spike for Pivot with remote power supply

PIVOT TUNABLE WHITE H470

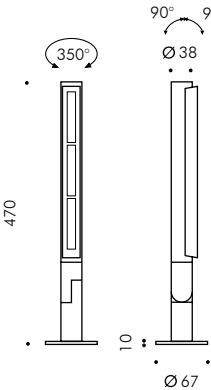

CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.1777T	Tunable White (2700 K-4000 K)	Fascio simmetrico con lenti Symmetric beam with lenses		90	1908 lm	12 W	24 Vdc remote (p.556)	PWM



ACCESSORI PER PIVOT TUNABLE WHITE Accessories for Pivot tunable white

S.1768	Picchetto per Pivot con alimentatore remoto	Spike for Pivot with remote power supply
---------------	---	--


ACCESSORI PER INSTALLAZIONE A PALO DI PIVOT Accessories for pole installation of Pivot

S.1758	Staffa per installazione a palo (pali Ø 60mm e Ø 76mm)	Bracket for pole installation (Ø 60mm and Ø 76mm poles)
---------------	--	---

ACCESSORI PALI PER PIVOT Pole accessories for Pivot


S.2800	Palo cilindrico H 2,5m fuori terra Ø60mm da interrare	H 2,5m above ground Ø60mm cylindrical pole to be buried
S.2842	Palo cilindrico H 3,5m fuori terra Ø60mm da interrare	H 3,5m above ground Ø60mm cylindrical pole to be buried
S.2812	Palo cilindrico H 3,0m fuori terra Ø76mm da interrare	H 3,0m above ground Ø76mm cylindrical pole to be buried
S.2844	Palo cilindrico H 4,5m fuori terra Ø76mm da interrare	H 4,5m above ground Ø76mm cylindrical pole to be buried

N.B. I pali sono disponibili anche nella versione con flangia saldata. Per codici e dettagli tecnici, consultare il sito web.
Note: Poles are also available with a welded base. For product codes and technical details, please refer to the website.

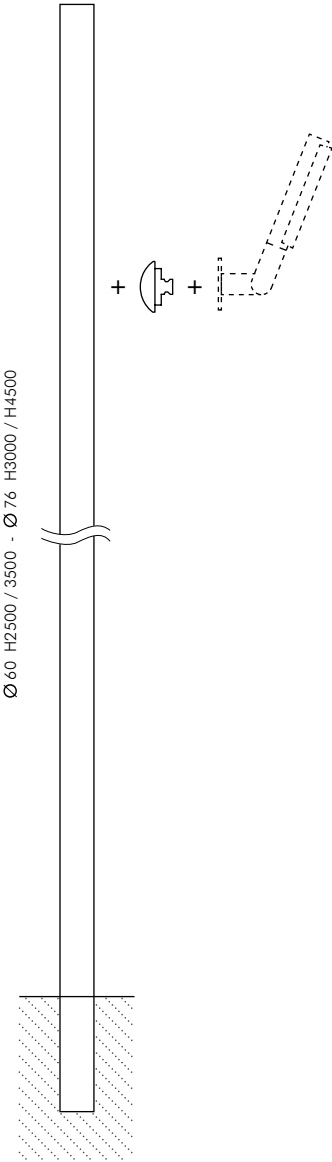



PIVOT 7 LED H355 CON BASE PER ALIMENTATORE
Pivot 7 led H355 with base for power supply

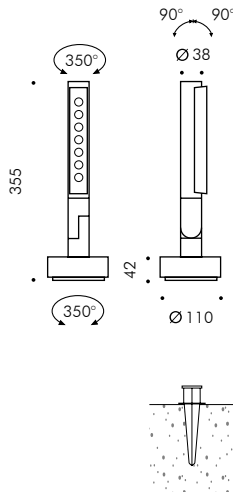


CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.1766H	2700 K	Fascio largo con 7 lenti	 31°	80	899 lm	24.4 W	220-240 Vac	ON-OFF
S.1766W	3000 K	Wide beam with 7 lenses		80	1061 lm	24.4 W	220-240 Vac	ON-OFF
S.1766N	4000 K			80	1101 lm	24.4 W	220-240 Vac	ON-OFF

ACCESSORI PER PIVOT 7 LED Accessories for Pivot 7 LED

- S.1762 Filtro fascio stretto 10° per Pivot 7 led Spot beam 10° filter for Pivot 7 LED
- S.1763 Filtro fascio diffuso 60° per Pivot 7 led Flood beam 60° filter for Pivot 7 LED
- S.1764 Filtro fascio ellittico 60°x1° per Pivot 7 led Elliptical beam 60°x1° filter for Pivot 7 LED
- S.1319 Picchetto per Pivot con base per alimentatore Spike for Pivot with base for power supply

PIVOT 12 LED H470 CON BASE PER ALIMENTATORE
Pivot 12 led H470 with base for power supply

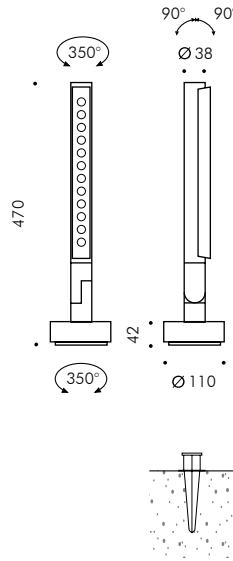

CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.1776H	2700 K	Fascio largo con 12 lenti	 31°	80	1598 lm	33.6 W	220-240 Vac	ON-OFF
S.1776W	3000 K	Wide beam with 12 lenses		80	1885 lm	33.6 W	220-240 Vac	ON-OFF
S.1776N	4000 K			80	1957 lm	33.6 W	220-240 Vac	ON-OFF

ACCESSORI PER PIVOT 12 LED Accessories for Pivot 12 LED

- S.1772 Filtro fascio stretto 10° per Pivot 12 led Spot beam 10° filter for Pivot 12 LED
- S.1773 Filtro fascio diffuso 60° per Pivot 12 led Flood beam 60° filter for Pivot 12 LED
- S.1774 Filtro fascio ellittico 60°x1° per Pivot 12 led Elliptical beam 60°x1° filter for Pivot 12 LED
- S.1319 Picchetto per Pivot con base per alimentatore Spike for Pivot with base for power supply