

ATTACCO A PALO Pole attachment



PARETE Wall mounted



L.110 H.420 D.200



L.85 H.330 D.155



L.60 H.240 D.115





DESCRIZIONE TECNICA Technical description	INFORMAZIONI GENERALI General information		CODICI COLORE Colour codes
Struttura in alluminio estruso e pressofuso. Vetro trasparente temprato di protezione. Viti in acciaio con rivestimento anticorrosivo. Precablati con cavo per Minismooth e Smooth. Entrata cavo singola per Megasmooth. Die-cast and extruded aluminium housing. Transparent protective toughened glass. Steel screws with anticorrosive coating. Pre-wired Minismooth and Smooth. Single cable entry for Megasmooth.	GRADO DI PROTEZIONE IP rating	IP65	● .09 Nero Black ● .14 Grigio alluminio Aluminium Grey
	CLASSE DI ISOLAMENTO Insulation class	CLASS II  CLASS I  (S.2920, S.2925)	
	RESISTENZA IMPATTO Mechanical resistance	IK 06	BREVETTATO Patented
			MODELLO REGISTRATO Registered design



PARETE

Wall mounted


MINISMOOTH H240

	CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
	S.2900H	2700 K	Fascio largo singolo con riflettore	 38°	90	542 lm	6.0 W	220-240 Vac	Dali2/Push
	S.2900W	3000 K	Single wide beam with reflector		90	579 lm	6.0 W	220-240 Vac	Dali2/Push
	S.2900N	4000 K	Single wide beam with reflector		90	607 lm	6.0 W	220-240 Vac	Dali2/Push
	S.2905H	2700 K	Fascio largo doppio con riflettore	 38°	90	1094 lm	10.0 W	220-240 Vac	Dali2/Push
	S.2905W	3000 K	Double wide beam with reflector		90	1158 lm	10.0 W	220-240 Vac	Dali2/Push
	S.2905N	4000 K	Double wide beam with reflector		90	1214 lm	10.0 W	220-240 Vac	Dali2/Push

SMOOTH H330

	CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
	S.2910H	2700 K	Fascio largo singolo con riflettore	 37°	90	1152 lm	11.5 W	220-240 Vac	Dali2/Push
	S.2910W	3000 K	Single wide beam with reflector		90	1175 lm	11.5 W	220-240 Vac	Dali2/Push
	S.2910N	4000 K	Single wide beam with reflector		90	1181 lm	11.5 W	220-240 Vac	Dali2/Push
	S.2915H	2700 K	Fascio largo doppio con riflettore	 37°	90	2304 lm	22.0 W	220-240 Vac	Dali2/Push
	S.2915W	3000 K	Double wide beam with reflector		90	2350 lm	22.0 W	220-240 Vac	Dali2/Push
	S.2915N	4000 K	Double wide beam with reflector		90	2361 lm	22.0 W	220-240 Vac	Dali2/Push

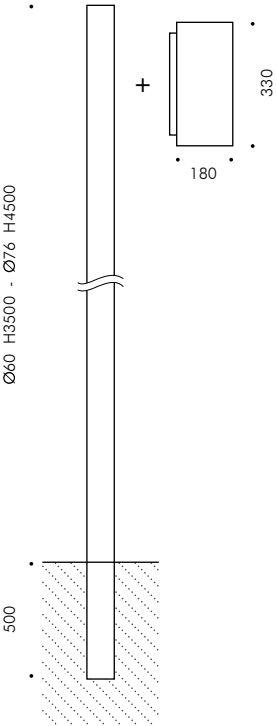
MEGASMOOTH H420

	CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
	S.2920H	2700 K	Fascio extra largo singolo con riflettore	 59°	90	2851 lm	23.0 W	220-240 Vac	Dali2/Push
	S.2920W	3000 K	Single extre wide beam with reflector		90	2917 lm	23.0 W	220-240 Vac	Dali2/Push
	S.2920N	4000 K	Single extre wide beam with reflector		90	2922 lm	23.0 W	220-240 Vac	Dali2/Push
	S.2925H	2700 K	Fascio extra largo doppio con riflettore	 59°	90	5702 lm	45.0 W	220-240 Vac	Dali2/Push
	S.2925W	3000 K	Double extre wide beam with reflector		90	5834 lm	45.0 W	220-240 Vac	Dali2/Push
	S.2925N	4000 K	Double extre wide beam with reflector		90	5844 lm	45.0 W	220-240 Vac	Dali2/Push

ATTACCO A PALO

Pole attachment

SMOOTH H330 ATTACCO A PALO
Smooth H330 pole attachment



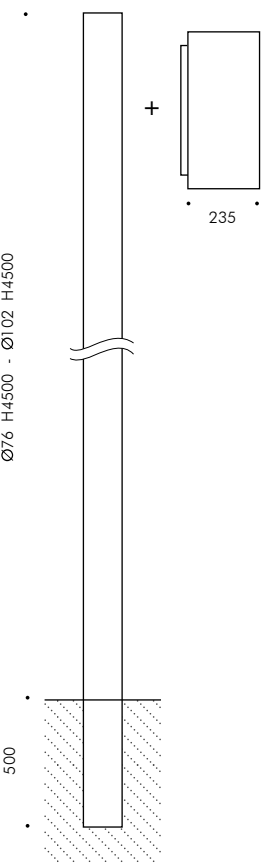
CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.2930H	2700 K	Fascio asimmetrico con riflettore Asymmetric beam with reflector		90	1750 lm	17.2 W	220-240 Vac	Dali2/Push
S.2930W	3000 K			90	1786 lm	17.2 W	220-240 Vac	Dali2/Push
S.2930N	4000 K			90	1795 lm	17.2 W	220-240 Vac	Dali2/Push

ACCESSORI PALI PER SMOOTH ATTACCO A PALO Pole accessories for Smooth pole attachment

S.2842	Palo cilindrico H 3,5m fuori terra, Ø 60mm da interrare H 3,5m above ground Ø 60mm cylindrical pole to be buried
S.2844	Palo cilindrico H 4,5m fuori terra, Ø 76mm da interrare H 4,5m above ground Ø 76mm cylindrical pole to be buried

N.B. I pali sono disponibili anche nella versione con flangia saldata. Per codici e dettagli tecnici, consultare il sito web.
Note: Poles are also available with a welded base. For product codes and technical details, please refer to the website.

MEGASMOOTH H420 ATTACCO A PALO
Megasmooth H420 pole attachment



CODE	CCT	OPTIC	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.2940H	2700 K	Fascio asimmetrico con riflettore Asymmetric beam with reflector		90	2962 lm	28.0 W	220-240 Vac	Dali2/Push
S.2940W	3000 K			90	3030 lm	28.0 W	220-240 Vac	Dali2/Push
S.2940N	4000 K			90	3035 lm	28.0 W	220-240 Vac	Dali2/Push

ACCESSORI PALI PER MEGASMOOTH ATTACCO A PALO Pole accessories for Megasmooth pole attachment

S.2844	Palo cilindrico H 4,5m fuori terra, Ø 76mm da interrare H 4,5m above ground Ø 76mm cylindrical pole to be buried
S.2814	Palo cilindrico H 4,5m fuori terra, Ø 102mm da interrare H 4,5m above ground Ø 102mm cylindrical pole to be buried

N.B. I pali sono disponibili anche nella versione con flangia saldata. Per codici e dettagli tecnici, consultare il sito web.
Note: Poles are also available with a welded base. For product codes and technical details, please refer to the website.