


SKILL Bollard and step light (surface mounted)

SIMES

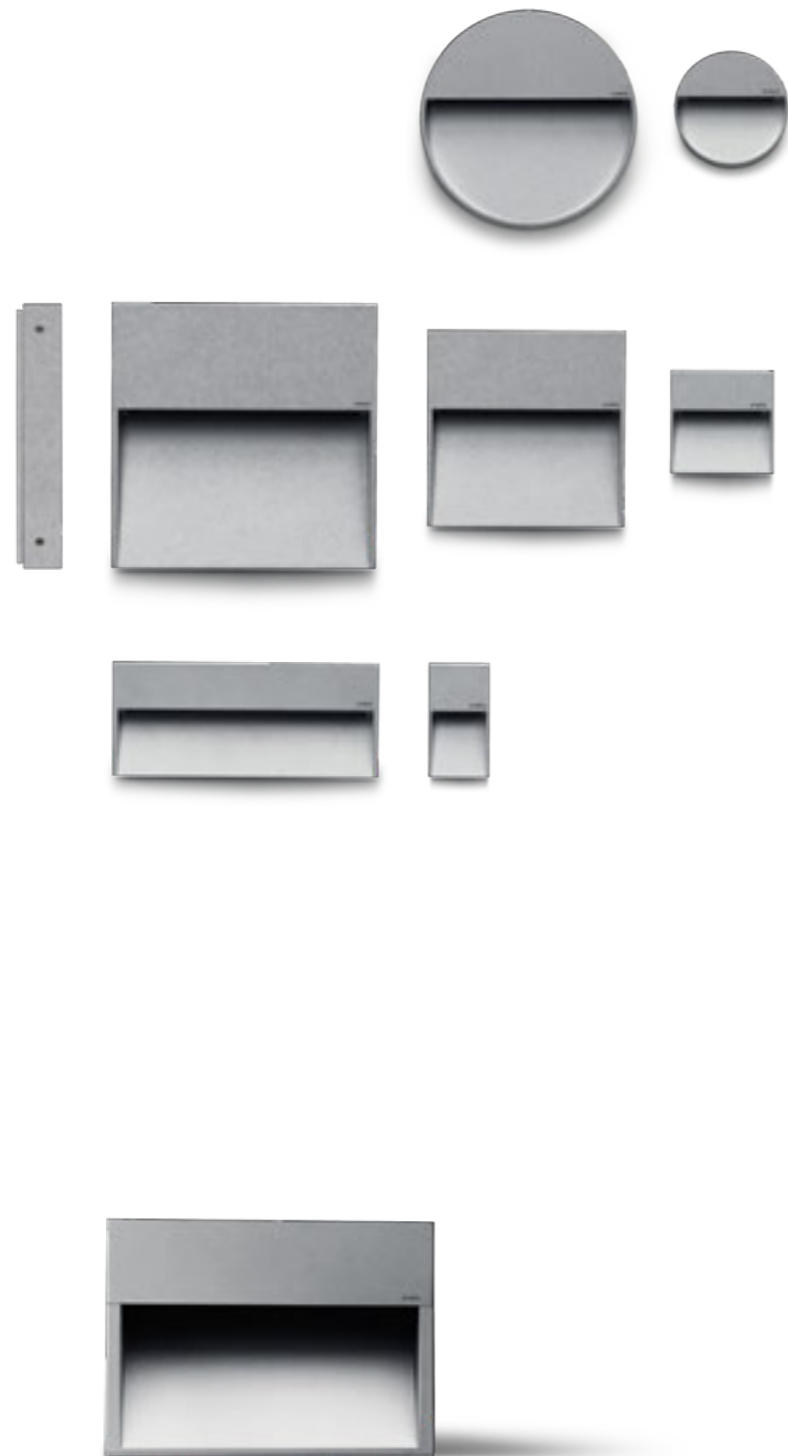

SKILL

Skill represents a new concept of outdoor lighting fitting; a recessed/not-recessed luminaire for wall mounting. It concentrates all the advantages of a recessed fitting, but without requiring a recessed box in the wall. Due to this easy and user friendly method of installation, Skill is a unique LED luminaire, assuring high lighting performance and total absence of glare. The most modern electronic technology is contained in the thickness of only 3 cm and provides an excellent quality of light while saving energy. Skill is available as round, square and rectangular versions. Skill becomes a wall recessed fitting totally flush with the wall by using a special recessed box and the fixing kit.

TECHNICAL DESCRIPTION

Die-cast aluminium housing with high corrosion resistance. Toughened glass diffuser. Stainless steel A4 screws. Luminaire with double grommets. Silicone gaskets. Double powder paint.

MINISKILL

Luminaire supplied with 1,0m neoprene H05RN-F cable.

SKILL AND SKILL 270

Luminaire with double cable entry and grommet.

SKILL BOLLARD

Luminaire supplied neoprene H05RN-F cable and connector.

REGISTERED DESIGN

PROTECTION CLASS

IP65

ISOLATION CLASS

CLASS I ⊕ SKILL

CLASS II ⊞ SKILL BOLLARD

CLASS III ⊕ MINISKILL

MECHANICAL RESISTANCE

IK 06 SKILL BOLLARD

IK 07 MINISKILL VERTICAL

IK 08

 SKILL

COLOURS SKILL

.01 White

.14 Aluminium Grey

.24 Anthracite Grey

COLOURS SKILL BOLLARD

.14 Aluminium Grey



.24 Anthracite Grey



MINISKILL Surface wall mounting

SIMES



Miniskill round 115mm



S.6270W
LED MODULE 3000K CRI90 551lm 4,7W
(on request 2700K CRI90 507lm)
(on request 4000K CRI80 735lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)



Miniskill square 105mm



S.6250W
LED MODULE 3000K CRI90 551lm 4,7W
(on request 2700K CRI90 507lm)
(on request 4000K CRI80 735lm)
24Vdc PWM

Requires constant voltage 24Vdc
remote power supply (page 522-523)

Miniskill vertical 60mm





S.6230W
LED MODULE 3000K CRI90 775lm 4W
(on request 2700K CRI90 652lm)
(on request 4000K CRI80 891lm)
24Vdc PWM



Requires constant voltage 24Vdc
remote power supply (page 522-523)

MINISKILL Flush recessed wall mounting



Miniskill becomes a wall recessed fitting totally flush with the wall by using the recessing box and the fixing kit.



S.6278
RECESSED BOX + FIXING KIT
for MINISKILL ROUND
(suitable for fair faced concrete applications)
(extractor tools included)



S.6256
RECESSED BOX + FIXING KIT
for MINISKILL SQUARE
(suitable for fair faced concrete applications)
(extractor tools included)



S.6239
RECESSED BOX + FIXING KIT
for MINISKILL VERTICAL
(suitable for fair faced concrete applications)
(extractor tools included)



Private Villa, Suzano, Brescia, Italy © ph. Mario Bertani / Simes S.p.A.



SKILL Surface wall mounting

SIMES

SKILL Flush recessed wall mounting

SIMES



Skill round 220mm



S.6280W
LED MODULE **3000K** CRI90 1050lm 8,9W
(on request 2700K CRI90 997lm)
(on request 4000K CRI80 1400lm)
220V-240Vac 50/60Hz
Phase-cut dimmer

Version with DALI 2 / PUSH power supply available on request with surcharge.



Skill square 200mm



S.6260W
LED MODULE **3000K** CRI90 1050lm 8,9W
(on request 2700K CRI90 997lm)
(on request 4000K CRI80 1400lm)
220V-240Vac 50/60Hz
Phase-cut dimmer



Version with DALI 2 / PUSH power supply available on request with surcharge.

Skill square 270mm





S.6255W
LED MODULE **3000K** CRI90 2100lm 17,8W
(on request 2700K CRI90 1995lm)
(on request 4000K CRI80 2800lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

Skill rectangular 270mm





S.6240W
LED MODULE **3000K** CRI90 1313lm 11,1W
(on request 2700K CRI90 1247lm)
(on request 4000K CRI80 1751lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




Skill becomes a wall recessed fitting totally flush with the wall by using the recessing box and the fixing kit.





S.6288
RECESSED BOX + FIXING KIT
for **SKILL ROUND**
(suitable for fair faced concrete applications)
(extractor tools included)



S.6268
RECESSED BOX + FIXING KIT
for **SKILL SQUARE**
(suitable for fair faced concrete applications)
(extractor tools included)

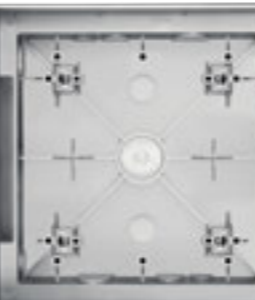


S.6257
RECESSED BOX + FIXING KIT
for **SKILL SQUARE 270mm**
(suitable for fair faced concrete applications)
(extractor tools included)





S.6247
RECESSED BOX + FIXING KIT
for **SKILL RECTANGULAR**
(suitable for fair faced concrete applications)
(extractor tools included)






S.6350W Single emission
 LED MODULE 3000K CRI90 1680lm 13,7W
 (on request 2700K CRI90 1596lm)
 (on request 4000K CRI80 1820lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

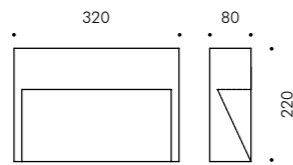

S.6360W Double emission
 LED MODULE 3000K CRI90 3360lm 27,5W
 (on request 2700K CRI90 3192lm)
 (on request 4000K CRI80 3640lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

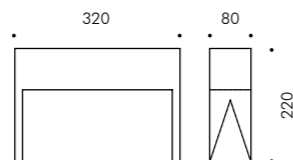

Accessory



S.6359
FLANGE FOR SKILL BOLLARD
 Flange to be anchored in concrete.



Private Villa, Isseo lake, Italy © ph. Simes S.p.A