


SMOOTH Wall mounted and pole mounted

SIMES

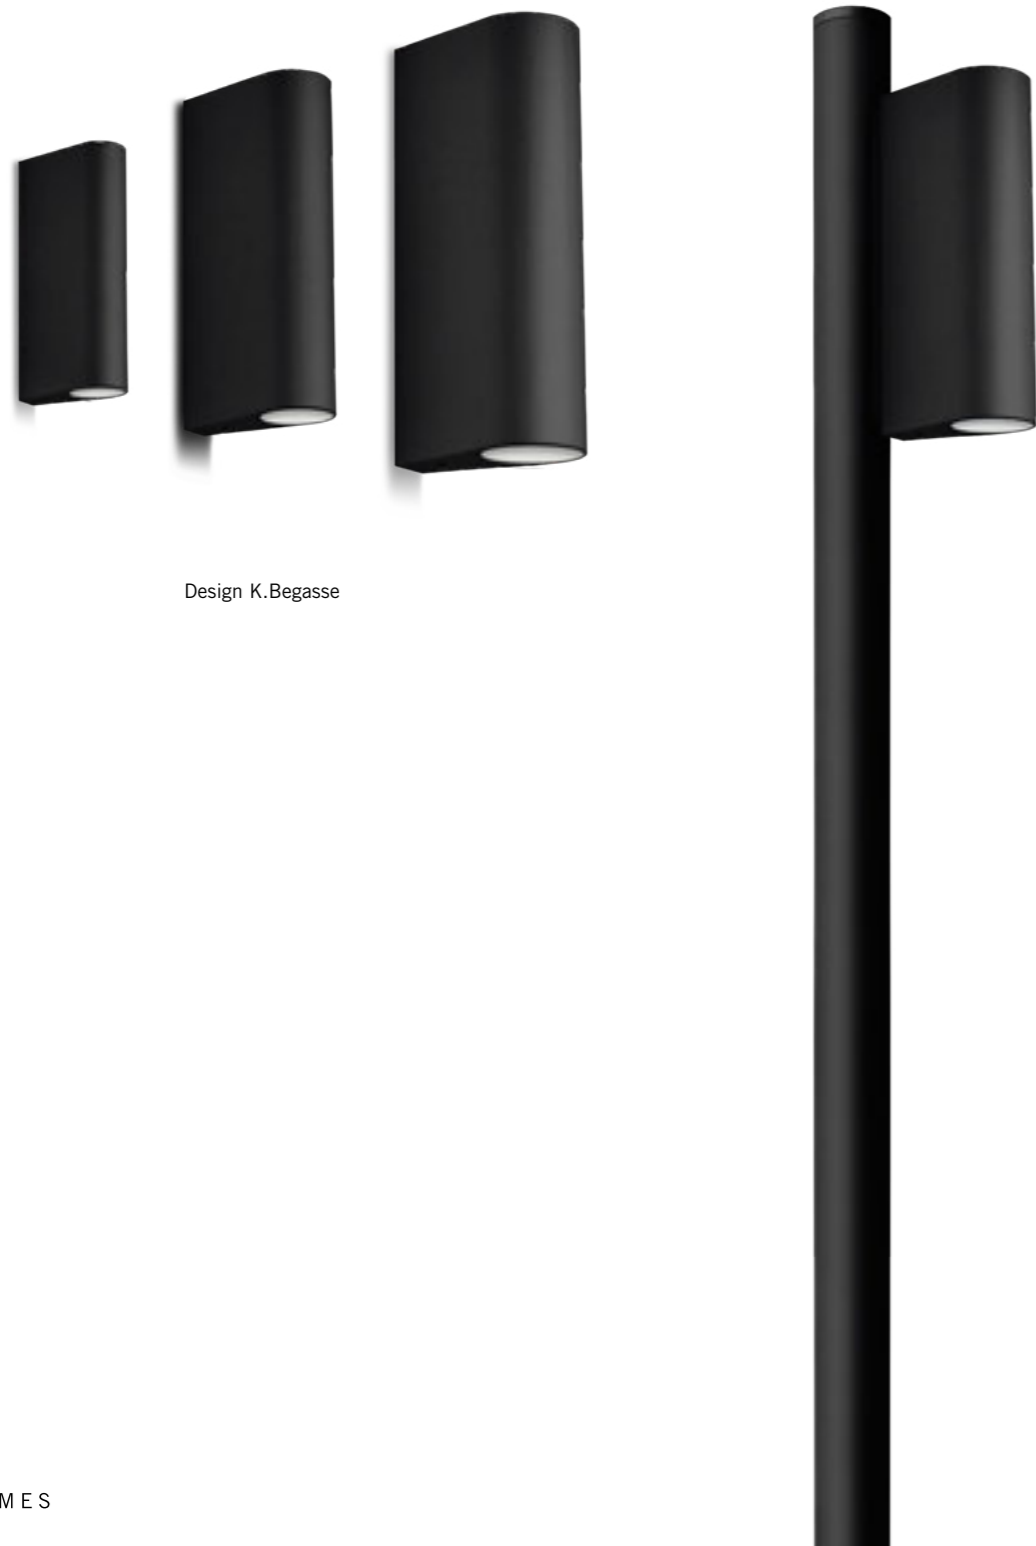

Design K.Begasse

SMOOTH

Smooth is a family composed by applique and pole version, the expression of an extreme technical and aesthetic synthesis. The proportions, the absence of edges and visible screws, the smooth and continuous surface that welcomes without interruption its technological heart, are the result of careful formal research. The excellent performance in functional and accent lighting are guaranteed by the latest generation LEDs, combined with specific reflectors.

TECHNICAL DESCRIPTION

Die-cast and extruded aluminium housing with high corrosion resistance. Stainless steel A4 screws. Toughened glass diffuser 4mm thick. Silicone gaskets. Double powder paint.

MINISMOOTH AND SMOOTH

Luminaire supplied with neoprene H05RN-F cable and connector.

MEGASMOOTH

Luminaire with one single cable entry and grommet.

PATENTED
REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS II □

MECHANICAL RESISTANCE
IK 06



COLOURS



.09 Black

.14 Aluminium Grey




www.simes.it/smooth

Minismooth




S.2900W Single Flood beam with reflector
LED MODULE **3000K** CRI90 619lm 4,4W
(on request 2700K CRI90 588lm)
(on request 4000K CRI80 675lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.2905W Double Flood beam with reflector
2x LED MODULE **3000K** CRI90 619lm 4,4W
(on request 2700K CRI90 588lm)
(on request 4000K CRI80 675lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Fixed LED position
Version with DALI 2 / PUSH power supply
available on request with surcharge.

Smooth




S.2910W Single Flood beam with reflector
LED MODULE **3000K** CRI90 1563lm 11,4W
(on request 2700K CRI90 1467lm)
(on request 4000K CRI80 1830lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable




S.2915W Double Flood beam with reflector
2x LED MODULE **3000K** CRI90 1563lm 11,4W
(on request 2700K CRI90 1467lm)
(on request 4000K CRI80 1830lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Fixed LED position
Version with DALI 2 / PUSH power supply
available on request with surcharge.

Megasmooth




S.2920W Single Wide Flood beam with reflector
LED MODULE **3000K** CRI90 3133lm 23,6W
(on request 2700K CRI90 3052lm)
(on request 4000K CRI80 3748lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable



S.2925W Double Wide Flood beam with reflector
2x LED MODULE **3000K** CRI90 3133lm 23,6W
(on request 2700K CRI90 3052lm)
(on request 4000K CRI80 3748lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Fixed LED position
Version with DALI 2 / PUSH power supply
available on request with surcharge.


Smooth pole mounted




S.2930W Asymmetrical beam with reflector
LED MODULE **3000K** CRI80 2353lm 15,6W
(on request 2700K CRI80 2230lm)
(on request 4000K CRI80 2382lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Fixed LED position
Version with DALI 2 / PUSH power supply
available on request with surcharge.

Pole not included




Megasmooth pole mounted



S.2940W Asymmetrical beam with reflector
LED MODULE **3000K** CRI80 3702lm 24,3W
(on request 2700K CRI80 3547lm)
(on request 4000K CRI80 3832lm)
220V-240Vac 50/60Hz
ON/OFF Not Dimmable

Fixed LED position
Version with DALI 2 / PUSH power supply
available on request with surcharge.


Pole not included



Poles with base

S.2843
Ø 60mm CYLINDRICAL POLE WITH BASE
Pole total height 3500mm

S.2845
Ø 76mm CYLINDRICAL POLE WITH BASE
Pole total height 4500mm
Provided with inspection door
and cable connector

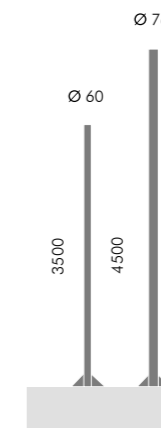

Accessory

S.2849
PLANTED ROOT FOR S.2843 and S.2845
h=470mm and bolts in galvanized steel
with M16 threads.



