

# Spillo


## Wall Applique and bollard with adjustable Stem

Spillo was developed as a user friendly and quick solution to the never ending need to direct the light in a specific direction.

Spillo was thought as an adjustable fixture that can be oriented at 350° depending on the context and project application. The luminaire can be rotated on its axis giving different effects: direct, indirect and also wall washer.

Available in different versions, single, double or tilted applique, Spillo can be wall or ceiling mounted and installed at one's discretion through its fixation base that also enables to adjust its positioning at different angles.

In the bollard version, its adjustable flexibility allows you to choose the area or the object to illuminate. With its minimalistic design and without visible screws, Spillo does not alter the architectural balance but on the contrary it disappears in it while enhancing it through light.





Private villa, Italy - Arch. Duilio Damilano © ph. Mario Bertani

## SPILLO Wall applique and bollard with adjustable Stem

Die-cast EN AB-47100 aluminium housing, extruded EN AW-6060 aluminium structure with high corrosion resistance.  
Toughened glass diffuser 4mm thick.  
Stainless steel screws.  
Luminaire supplied with 5m (4m Bollard) of cable.  
Silicone gaskets.  
**Double powder paint.**

**Require constant voltage 24V remote power supply.**

**Protection class**  
IP65


**Isolation class**  
CLASS III ⚡

**Mechanical resistance**  
IK 07

Leds 3000K CRI90 versions are available on request.


*For the latest technical information and luminaire updates with LED technology please refer to [www.simes.it](http://www.simes.it)*

**REGISTERED DESIGN**

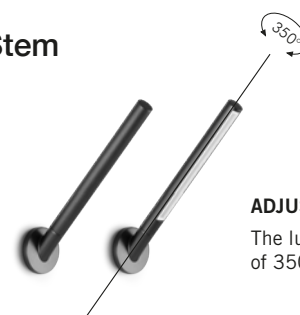

### ADJUSTABLE OPTIC

The luminaire can be rotated of 350° on its axis

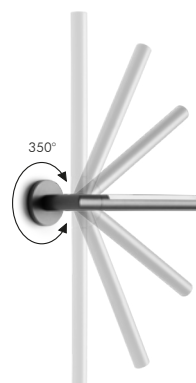

### ROTATING BASE

The luminaire can rotate on its base of 350°





**S.2416**  
**REMOTE DRIVER DIMMABLE DALI**  
**75W 230V/24V DC**  
**IP67 CLASS II SELV**  
Dimensions 280mm x40mm x28mm



**S.2405**  
**REMOTE DRIVER NOT DIMMABLE**  
**60W 230V/24V DC**  
**IP67 CLASS II SELV**  
Dimensions 150mm x53mm x35mm

Spillo tilted applique

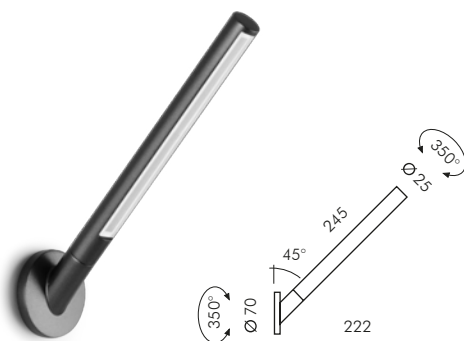


**S.1700H**  
MID-POWER LED **2700K** CRI90 819lm  
Rated luminaire luminous flux 308lm  
Rated input power 10,0W **24V DC**  
Computer-simulated photometrics

**Require constant voltage 24V DC remote power supply**

**Colour:**

- ☐ White (code .01)
- ☒ Burnished bronze (code .20)
- ☒ Anthracite grey (code .24)

Spillo applique





**S.1705H**  
MID-POWER LED **2700K** CRI90 819lm  
Rated luminaire luminous flux 308lm  
Rated input power 10,0W **24V DC**  
Computer-simulated photometrics

**Require constant voltage 24V DC remote power supply**

**Colour:**

- ☐ White (code .01)
- ☒ Burnished bronze (code .20)
- ☒ Anthracite grey (code .24)

Spillo double applique

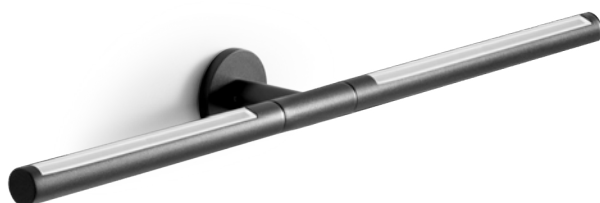


**S.1706H**  
MID-POWER LED **2700K** CRI90 1638lm  
Rated luminaire luminous flux 616lm  
Rated input power 20,0W **24V DC**  
Computer-simulated photometrics

**Require constant voltage 24V DC remote power supply**



**Colour:**

- ☐ White (code .01)
- ☒ Burnished bronze (code .20)
- ☒ Anthracite grey (code .24)

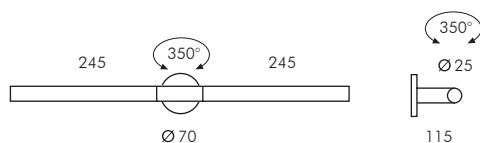

# SILLO BOLLARD Adjustable Stem

Spillo bollard 90°

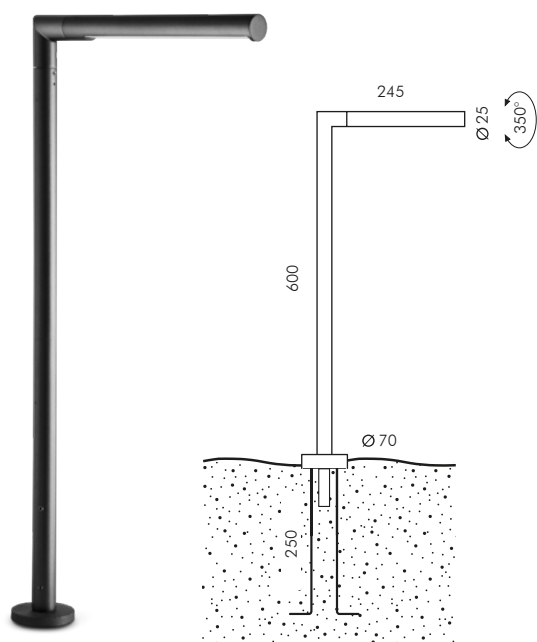

## S.1711H

MID-POWER LED **2700K** CRI90 819lm  
Rated luminaire luminous flux 308lm  
Rated input power 10,0W **24V DC**  
Computer-simulated photometrics



**Require constant voltage 24V DC remote power supply**

With flange to be fixed in concrete with stainless steel screws for fixing in the ground.

### Colour:

- Burnished bronze(code .20)
- Anthracite grey (code .24)

Spillo bollard

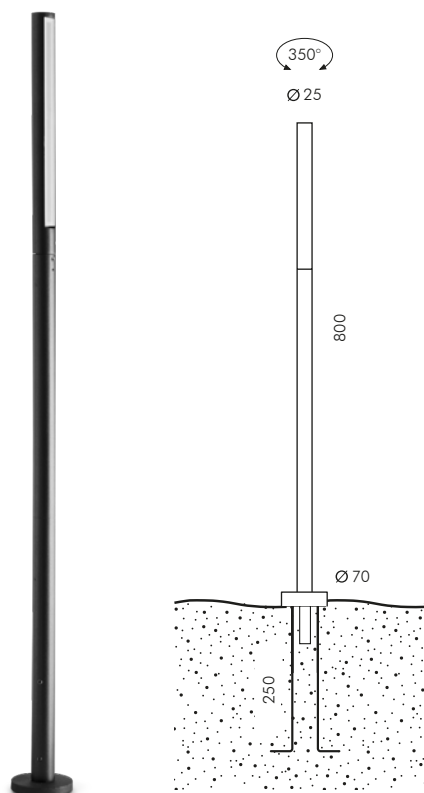

## S.1710H

MID-POWER LED **2700K** CRI90 819lm  
Rated luminaire luminous flux 308lm  
Rated input power 10,0W **24V DC**  
Computer-simulated photometrics

**Require constant voltage 24V DC remote power supply**

With flange to be fixed in concrete with stainless steel screws for fixing in the ground.

### Colour:

- Burnished bronze(code .20)
- Anthracite grey (code .24)







