




Stick

Bollard



www.simes.it/stick



STICK

Stick is a family of cylindrical bollards with a simple and essential design, characterised by perfect uniformity of light all round. Available in three different sizes, each in two versions, single and double emission, Stick is particularly suitable for residential areas and guarantees a diffuse and homogeneous light beam. In the double emission version, the opening of the light beam is designed to cover the entire space around the pole at 360°.

The Stick family, for its aesthetic and dimensional characteristics, completes the Microlighting collection designed to enhance outdoor residential spaces.

TECHNICAL DESCRIPTION
Extruded aluminium profile, head and base in die-cast aluminium with high corrosion resistance. Opal resin diffuser (MINISTICK). Prismatic micro-sandblasted extra-clear toughened glass diffuser (STICK). Stainless steel Allen screws with insulating treatment against galvanic corrosion. Silicone gaskets. Double powder paint.

MINISTICK
Luminaire supplied with flat cable 5,0m for remote connections.

STICK
Luminaire supplied with neoprene 5,0m H05RN-F cable.

PROTECTION CLASS
IP54

ISOLATION CLASS
CLASS III MINISTICK
CLASS I STICK

MECHANICAL RESISTANCE
IK 06

COLOURS

.09 Black

.24 Anthracite Grey

REGISTERED DESIGN




Light distribution
double emission version

Light distribution
single emission version



MINISTICK Ø 38mm

H 220mm
Single emission



S.2080W
LED MODULE 3000K CRI90 240lm 2,0W
(on request 2700K CRI90 220lm)
(on request 4000K CRI90 260lm)
24Vdc PWM

Require constant voltage 24Vdc
remote power supply

H 220mm
Double emission



S.2081W
2x LED MODULE 3000K CRI90 240lm 2,0W
(on request 2700K CRI90 220lm)
(on request 4000K CRI90 260lm)
24Vdc PWM

Require constant voltage 24Vdc
remote power supply


Accessories for MINISTICK Ø 38mm

S.2088

STAKE

In polypropylene

Colour: black (code 09)




S.2415

DIMMABLE DALI POWER SUPPLY for MONOCHROME LED

24W 230V/24Vdc
IP67 CLASS II SELV
Frequency PWM 244Hz
Dimensions 185mm x35mm x33mm

STICK Ø 76mm


H 360mm
Single emission



S.2090W

LED MODULE 3000K CRI90 501lm 5,4W
(on request 2700K CRI90 456lm)
(on request 4000K CRI90 541lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH

H 360mm
Double emission



S.2091W

2 x LED MODULE 3000K CRI90 501lm 5,4W
(on request 2700K CRI90 456lm)
(on request 4000K CRI90 541lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH


Accessories for STICK Ø 76mm

S.2098

STAKE

In polypropylene


Colour: black (code 09)

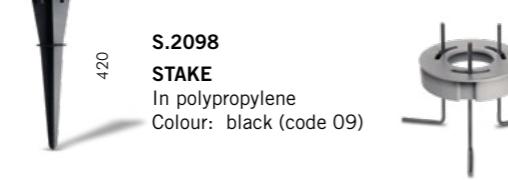

SIMES


STICK Ø 76mm

H 800mm
Single emission

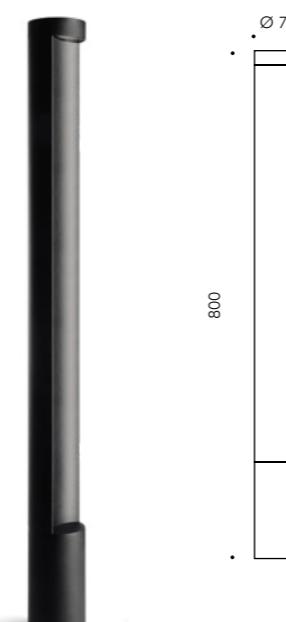


S.2095W

LED MODULE 3000K CRI90 501lm 5,4W
(on request 2700K CRI90 456lm)
(on request 4000K CRI90 541lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH




H 800mm
Double emission

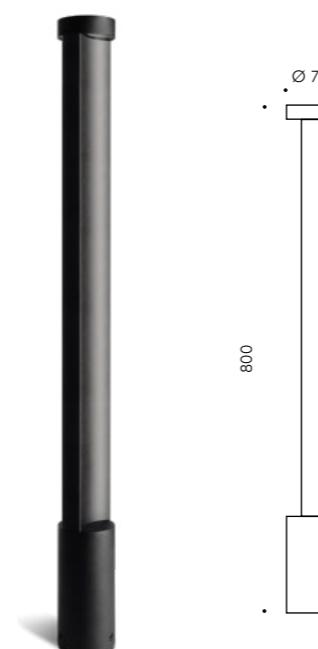

S.2096W

2 x LED MODULE 3000K CRI90 501lm 5,4W
(on request 2700K CRI90 456lm)
(on request 4000K CRI90 541lm)
220V-240Vac 50/60Hz
Dimmable DALI 2 / PUSH



Accessory for STICK Ø 76mm

S.2099

FLANGE

Flange to be buried in concrete

