

Tomorrow

Bollard and Pole Top

Tomorrow is a bollard specifically developed for pedestrian areas and perfect for landscape areas as it can blend into hedges, bushes and flowerbeds. It comes with a Mid-power LED with extraordinary uniform light distribution at ground level, providing perfect homogeneous lighting without any shadows cast.

Tomorrow has very balanced and elegant proportions and is available in two different heights (45cm or 80cm).

Tomorrow Pole top has been thought of as a retrofit solution onto existing poles and to substitute obsolete pole tops. This version can be installed onto poles and is available in Mid-power LED for a more comfortable and soft distribution and it is available with a Mid-Power LED beam in two different diameters and powers.





Private villa, Italy - Arch. Duilio Damilano © ph. Mario Bertani

TOMORROW Bollard

Extruded EN AW-6060 aluminium profile,
Die-cast EN AB-47100 aluminium
housing with high corrosion resistance.
Micro etched prismatic glass diffuser.
Stainless steel screws.
Pre-wired luminaire with neoprene cable
and connector for connection in the
bollard.
Silicone gaskets.
Double powder paint.

Protection class
IP65

Isolation class
CLASSE II

Mechanical resistance
IK 06



Leds 4000K CRI90 versions are available
on request.

*For the latest technical information and
product updates with LED technology
please refer to the website
(www.simes.it)*

REGISTERED DESIGN


Colour:

● Anthracite grey (code .24)

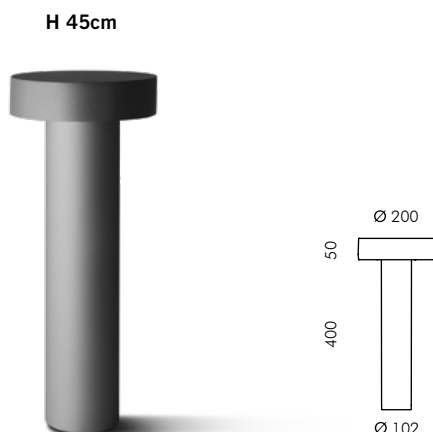



S.2140W
MID-POWER LED **3000K** CRI90 1680lm
Rated luminaire luminous flux 1083lm
Rated input power 14,1W
220V-240V AC 50/60Hz / DC Not Dimmable

Luminous flux wasted upward 0%.
Pole included





S.2140H
MID-POWER LED **2700K** CRI90 1680lm
Rated luminaire luminous flux 1083lm
Rated input power 14,1W
220V-240V AC 50/60Hz / DC Not Dimmable

Luminous flux wasted upward 0%.
Pole included

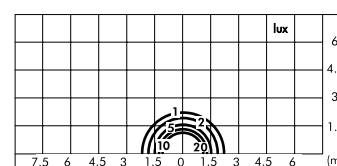


S.2149
FLANGE FOR TOMORROW
Flange to be fixed in concrete with stainless steel screws for fixing in the ground.

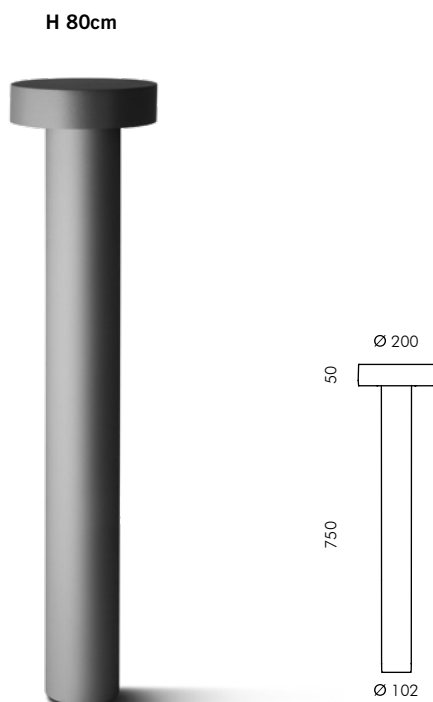



S.2141W
MID-POWER LED **3000K** CRI90 1680lm
Rated luminaire luminous flux 1083lm
Rated input power 14,1W
220V-240V AC 50/60Hz / DC Not Dimmable

Luminous flux wasted upward 0%.
Pole included




S.2141H
MID-POWER LED **2700K** CRI90 1680lm
Rated luminaire luminous flux 1083lm
Rated input power 14,1W
220V-240V AC 50/60Hz / DC Not Dimmable

Luminous flux wasted upward 0%.
Pole included

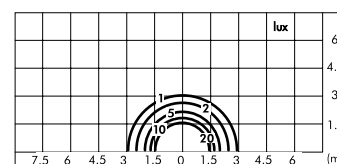


S.2149
FLANGE FOR TOMORROW
Flange to be fixed in concrete with stainless steel screws for fixing in the ground.

TOMORROW 200 POLE TOP \varnothing 60 mm attachment

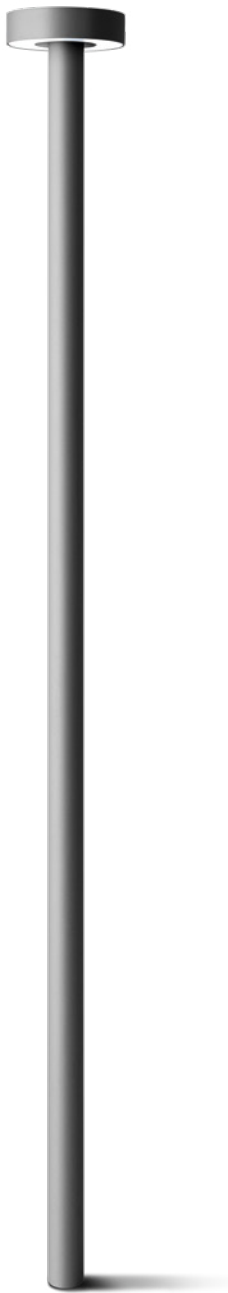


Tomorrow 200 Post top






S.2131W
MID-POWER LED **3000K** CRI90 3360lm
Rated luminaire luminous flux 2059lm
Rated input power 28,2W
220V-240V AC 50/60Hz / DC Not Dimmable

Luminous flux wasted upward 0%.
Pole not included



S.2131H
MID-POWER LED **2700K** CRI90 3360lm
Rated luminaire luminous flux 2059lm
Rated input power 28,2W
220V-240V AC 50/60Hz / DC Not Dimmable

Luminous flux wasted upward 0%.
Pole not included

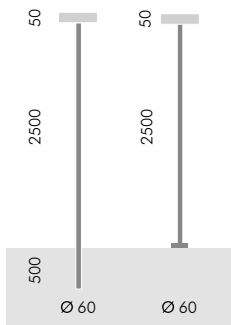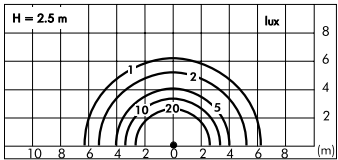

Poles for Tomorrow 200


S.2800
 \varnothing 60mm CYLINDRICAL POLE TO BE BURIED
Pole total height 3000mm
To be buried for 500mm
Finished luminaire total height above ground 2550mm

S.2801
 \varnothing 60mm CYLINDRICAL POLE WITH BASE
Pole total height 2500mm
Finished luminaire total height above ground 2550mm

S.2800 S.2801



Tomorrow 250 Post top




S.2136W

MID-POWER LED **3000K** CRI90 5767lm
 Rated luminaire luminous flux 3535lm
 Rated input power 44,1W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Computer-simulated photometrics

Luminous flux wasted upward 0%.

Pole not included






S.2136H

MID-POWER LED **2700K** CRI90 5767lm
 Rated luminaire luminous flux 3535lm
 Rated input power 44,1W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Computer-simulated photometrics

Luminous flux wasted upward 0%.

Pole not included

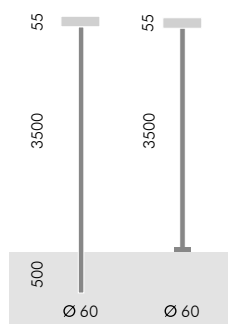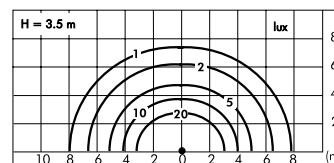

Poles for Tomorrow 250

S.2842

$\varnothing 60 \text{ mm}$ CYLINDRICAL POLE TO BE BURIED

Pole total height 4000mm
 To be buried for 500mm
 Finished luminaire total height above ground 3550mm

S.2843

$\varnothing 60 \text{ mm}$ CYLINDRICAL POLE WITH BASE

Pole total height 3500mm
 Finished luminaire total height above ground 3550mm

S.2842 S.2843



