





Très jolie

Applique, free standing table lamp and residential bollard

Très jolie is a complete range that includes a small bollard a wall applique and as a free standing table lamp, available in two different versions: 230V or free standing battery charged.

With a balanced and elegant design, Très jolie has been developed for the living quarters and residential outdoor areas enhancing and blending into the surrounding architecture and landscape.

Superior visual comfort has been obtained through its simplistic forms: its specific tapered stem catches the light, creating soft luminous nuances.

The free standing table version is a cordless solution that responds to temporary lighting requirements especially in those cases where there is a lack of direct power supply. It also provides a tunable white solution from 3000K to a warmer 2200K.







Private villa, Italy - Arch. Studio Varischi © ph. Mario Bertani

TRÈS JOLIE Applique, free standing table lamp and residential bollard

Die-cast EN AB-47100 and extruded EN AW-6060 (bollard) aluminium housing with high corrosion resistance.
Micro etched prismatic glass diffuser.
Stainless steel screws.
Luminaire 230V versions supplied with 5m (4m Bollard) of cable.
Silicone gaskets.
Double powder paint.

Protection class
IP65

Isolation class
CLASS II  (230V)
CLASS III  (Stand alone)

Mechanical resistance
IK 06

Leds 3000K CRI90 versions are available on request

For the latest technical information and luminaire updates with LED technology please refer to www.simes.it.

REGISTERED DESIGN



With rechargeable battery


The luminaire head is easily removable with a magnetic fastening to the stem for the charging operation.
Luminaire operating on Lithium polymers fed Battery via a micro USB plug with a maximum power (battery version) of 8 hours to be used as a portable decorative luminaire for the exterior.
Lighting and dimming (0%-100%) with the simple touch of the upper part of the head.
Supplied with Micro USB cable and power supply 230V.

230V versions


Luminaire hard wired with 4m single neoprene cable.
With flange to be fixed in concrete with stainless steel screws for fixing in the ground (Tall bollard version).



Wall mounted



230V




S.2500H

MID-POWER LED **2700K** CRI90 1008lm
 Rated luminaire luminous flux 379lm
 Rated input power 8,5W
 220V-240V AC 50/60Hz / DC
 Not Dimmable


Colour:

- White (code .01)
- Burnished bronze (code .20)
- Anthracite grey (code .24)

Tall bollard with flange

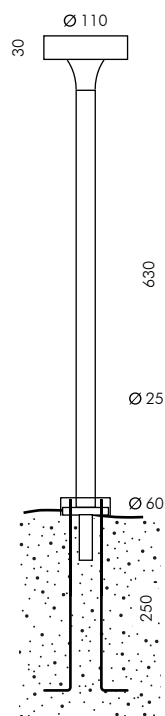

230V



S.2506H


MID-POWER LED **2700K** CRI90 1008lm
 Rated luminaire luminous flux 379lm
 Rated input power 8,5W
 220V-240V AC 50/60Hz / DC
 Not Dimmable

With flange to be fixed in concrete with stainless steel screws for fixing in the ground.


Colour:

- White (code .01)
- Burnished bronze (code .20)
- Anthracite grey (code .24)

Short bollard
with ground stake

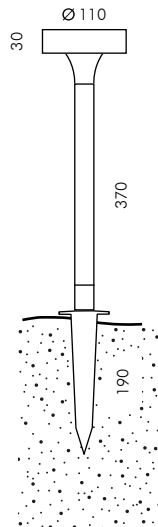

230V




S.2510H

MID-POWER LED **2700K** CRI90 1008lm
Rated luminaire luminous flux 379lm
Rated input power 8,5W
220V-240V AC 50/60Hz / DC
Not Dimmable


Colour:

- White (code .01)
- Burnished bronze (code .20)
- Anthracite grey (code .24)

Table mounted battery charged
with magnetic base



STAND ALONE



S.2515W

DIM TO WARM LED **3000K-2200K** CRI90 330-272lm
Rated luminaire luminous flux 124-103lm
Rated input power 2,5W
Dimming light (0%-100%)
Luminaire operating on rechargeable lithium polymers fed battery.
Independent charge approx. 8 hours

Supplied with Micro USB cable and
power supply 230V.

Colour:

- White (code .01)



S.2519

**STAKE for Table mounted battery
charged with magnetic base**
in polypropylene for temporary
applications.

