



www.simes.it/tres-jolie

TRÈS JOLIE

Très Jolie is a complete range that includes a small bollard version, a wall applique and a free standing lamp, available in two different versions: 230V or free standing with rechargeable battery. With its simple but elegant design, Très Jolie has been developed to illuminate outdoor spaces, enhancing and blending into the surrounding architecture and landscape. Superior visual comfort has been obtained through its simplistic forms: its special tapered stem catches the light and embellishes the object, creating soft bright shade. The free standing table version is a cordless solution that offers the light also where there is no direct power supply. It also provides a tunable white solution from 3000K to a warmer 2200K.

TECHNICAL DESCRIPTION

Die-cast and extruded (bollard) aluminium housing with high corrosion resistance. Micro etched prismatic glass diffuser. Stainless A4 steel screws. Silicone gaskets. Double powder paint.

APPLIQUE

Luminaire supplied with 5,0m neoprene H05RN-F cable.

BOLLARD

Luminaire supplied with 4,0m neoprene H05RN-F cable.

RECHARGEABLE TABLE LAMP

Luminaire operating on Lithium polymers fed Battery via a micro USB plug with a maximum power (battery version) of 8 hours to be used as a portable decorative luminaire for the exterior. Lighting and dimming (0%-100%) with the simple touch of the upper part of the head. Supplied with Micro USB cable and power supply 230V.

REGISTERED DESIGN

PROTECTION CLASS

IP65

ISOLATION CLASS
CLASS II 230V
CLASS III FREE STANDING

MECHANICAL RESISTANCE
IK 07

COLOURS APPLIQUE AND BOLLARD



- .01 White
- .09 Black
- .24 Anthracite Grey

COLOURS RECHARGEABLE TABLE LAMP

- .01 White
- .24 Anthracite Grey





Wall mounted



S.2500W
 LED MODULE 3000K CRI90 1146lm 8,1W
 (on request 2700K CRI90 1054lm)
 (on request 4000K CRI80 1423lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable



Short bollard with ground stake

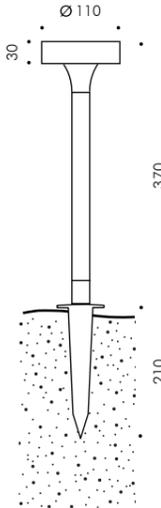

S.2510W
 LED MODULE 3000K CRI90 1146lm 8,1W
 (on request 2700K CRI90 1054lm)
 (on request 4000K CRI80 1423lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

Stake in polypropylene included

Tall bollard with flange

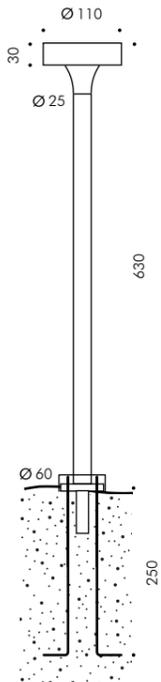



S.2506W
 LED MODULE 3000K CRI90 1146lm 8,1W
 (on request 2700K CRI90 1054lm)
 (on request 4000K CRI80 1423lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

Flange to be fixed in concrete included



Private villa, Italy - Arch. Varischi e Geom. Berlandis © ph. Mario Bertani

Rechargeable table lamp
with magnetic base



S.2515W
LED MODULE DIM TO WARM 3000K-2200K
CRI90 330-272lm 2,5W
Dimming light (0%-100%)
Luminaire operating on rechargeable
lithium polymers fed battery.
Independent charge approx. 8 hours



Supplied with Micro USB cable
and power supply 230V.



S.2519
STAKE for RECHARGEABLE TABLE LAMP
in polypropylene for ground positioning.



"Giardino Marilago" bar and beach club, Sulfano, Brescia, Italy - © ph. Mario Bertani