



АЛЫЕ
УНИИ

ВЕТА
ЦК

50000000

860 A



Led Tube

Adjustable wall mounted

LED TUBE is an adjustable modular luminaire specifically designed for grazing effects on façades and window frames. It can be cut to size and therefore offer maximum flexibility of application.



LED TUBE Adjustable wall mounted

Coextruded polycarbonate diffuser
1,5 mm thick with a 50 µm
protective layer against UV rays.
Transparent silicone end caps.
Fixing base in extruded anodized
EN AW-6060 aluminium housing with
high corrosion resistance.
Stainless steel screws.
Circuit equipped with a through
supply system for parallel connection
up to a maximum of 5 fittings in line
for RGB version and up to a maximum
of 10 fittings in line for 230V version.


Colour:

○ Anodized aluminium (code 13)

Protection class

IP65

Isolation class

CLASS II 

CLASS III  RGB

Mechanical resistance


IK 08

*For the latest technical information
and luminaire updates with LED
technology please refer to
www.simes.it*

PATENTED



92



506



S.3408

END CAP WITH SUPPLY CABLE

Only for 230V (codes S.5905W
S.5905N).

Silicone end cap with piece of cable
to supply the following fitting with
parallel connection.



S.3409

END CAP WITH SUPPLY CABLE




Only for RGB version (code S.5902).

Silicone end cap with piece of cable
to supply the following fitting with
parallel connection.

S.5901

WALL BRACKET
combined to LED TUBE
for wall applications

LED Tube 1000 mm

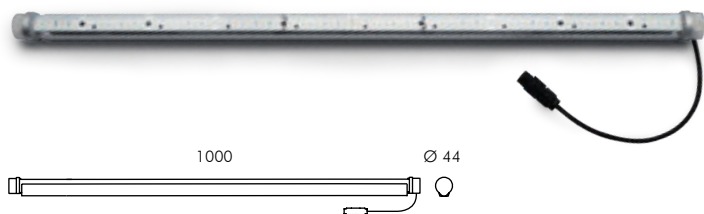

S.5905W

MID-POWER LEDs **3000K** CRI90 1900lm
 Rated luminaire luminous flux 1468lm
 Rated input power 23W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Adjustable optic

h(m)	E(lx)			
2.5	4	4	3	3
2.0	8	7	5	4
1.5	17	15	8	7
1.0	54	43	18	6
0.5	290	155	23	5
0.12 m	0 0.5 1.0 1.5 (m)			

S.5905N

MID-POWER LEDs **4000K** CRI90 2300lm
 Rated luminaire luminous flux 1784lm
 Rated input power 23W
 220V-240V AC 50/60Hz / DC Not Dimmable
 Adjustable optic

h(m)	E(lx)			
2.5	5	5	4	3
2.0	9	8	6	5
1.5	22	18	10	6
1.0	66	49	20	8
0.5	452	257	24	5
0.12 m	0 0.5 1.0 1.5 (m)			

S.5902

MID-POWER LEDs RGB
 Rated input power 16W **24V PWM**
 Adjustable optic
 Requires constant voltage remote PWM
 power supply (page 471)

h(m)	E(lx)			
2.5	0	0	0	0
2.0	1	5	1	0
1.5	1	3	2	1
1.0	7	5	2	1
0.5	36	21	3	0
0.12 m	0 0.5 1.0 1.5 (m)			

