




Ceiling and wall bulkhead

The classic bulkhead VEDO, made with aluminium, stainless-steel and glass, is appreciable for its solidity and quality of the light.





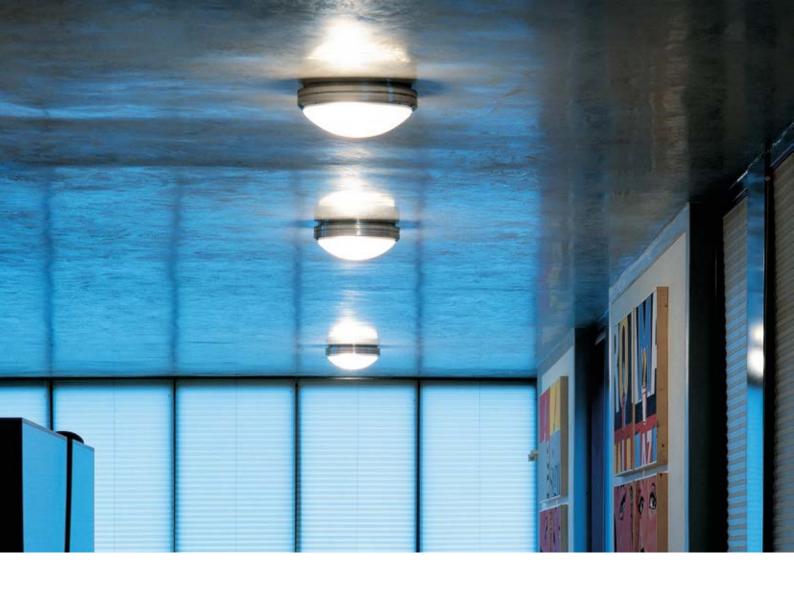

VEDO Ceiling and wall bulkhead

Die cast EN AB-47100 aluminium housing with high corrosion resistance. Sand blasted glass diffuser (Vandalproof opal polycarbonate diffuser available on request). Aluminium reflector. Stainless steel screws. Luminaire suitable for double grommets. Dutral gaskets. Double powdered paint .

Colours:

White (code 01)Aluminium grey (code 14)

Protection class

IP55

Isolation class

CLASS I 🚇


Mechanical resistance of glass

IK 06


Lamp TC not included.

For the latest technical information and product updates with LED technology please refer to the official website (www.simes.it)


S.6709 Vedo oval with Ring




S.6759 Vedo oval with Visor



S.6769 Megavedo oval with Ring



S.6789 Megavedo oval with Visor



VEDO oval



For lamp TC-DEL 18W G24q-2 1200Im Rated luminaire luminous flux 492Im Rated input power 22W



For lamp TC-F 36W 2G10 2800lm Rated luminaire luminous flux 1652lm Rated input power 41W

Rated input power 41W (emergency version available on request)



For lamp TC-DEL 18W G24q-2 1200Im Rated luminaire luminous flux 300Im Rated input power 22W



S.6779 Megavedo oval with Up-Down Visor

For lamp TC-F 36W 2G10 2800Im Rated luminaire luminous flux 952Im Rated input power 41W (emergency version available on request)



For lamp TC-DEL 18W G24q-2 1200Im Rated luminaire luminous flux 252Im Rated input power 22W



Megavedo oval with Visor

For lamp TC-F 36W 2G10 2800Im Rated luminaire luminous flux 840Im Rated input power 41W (emergency version available on

S.6789

request)

VEDO Round SIMES



For lamp TC-DEL 18W G24q-2 1200lm Rated luminaire luminous flux 672lm Rated input power 22W (emergency version available on request)



S.6869 Megavedo round with Ring

For lamp TC-F 36W 2G10 2800lm Rated luminaire luminous flux 1540lm Rated input power 41W (emergency version available on request)



For lamp TC-DEL 18W G24q-2 1200Im Rated luminaire luminous flux 300Im Rated input power 22W (emergency version available on request)



S.6879 Megavedo round with Up-Down Visor

For lamp TC-F 36W 2G10 2800lm Rated luminaire luminous flux 896lm Rated input power 41W (emergency version available on request)



For lamp TC-DEL 18W G24q-2 1200Im Rated luminaire luminous flux 372Im Rated input power 22W (emergency version available on request)





For lamp TC-F 36W 2G10 2800Im Rated luminaire luminous flux 756Im Rated input power 41W (emergency version available on request)

