



# Marker

## Step riser recessed

MARKER is a luminaire designed to illuminate stairs and to be recessed in the riser of the steps. It is characterized by the complete absence of glare thanks to a positioning system of the light source, purposely engineered for the best control and downward orientation of light, safety and the visible comfort are totally guaranteed.



# Walker

## Wall recessed

Neat lines, essential shapes, high performances: WALKER is a wall recessed luminaire developed to enlighten floors with a wide and well-directed light avoiding any glare effect. The front frame, with no visible screws, is fixed through a spring locking system that preserves the elegant and well-proportioned aesthetic.





Ricca Costruzioni, Castrezzato (Brescia), Italy, Arch. Giovanni Mario Gozzini © SIMES S.p.a.

## MARKER Step riser recessed / WALKER Wall recessed

Die-cast EN AB-47100 aluminium housing with high corrosion resistance.  
Toughened glass diffuser.  
Stainless steel screws.  
Luminaire with double cable entry and cable glands.  
Silicone gaskets.  
**Double powder paint.**

### Colour (MARKER):

Aluminium grey (code 14)

### Colours (WALKER):

White (code 01)

Aluminium grey (code 14)

### Protection class

IP65

### Isolation class

CLASS I ⊕

### Mechanical resistance of glass


IK 10



Leds 4000K CR180 versions are available on request.



*For the latest technical information and luminaire updates with LED technology please refer to [www.simes.it](http://www.simes.it)*

### REGISTERED DESIGN

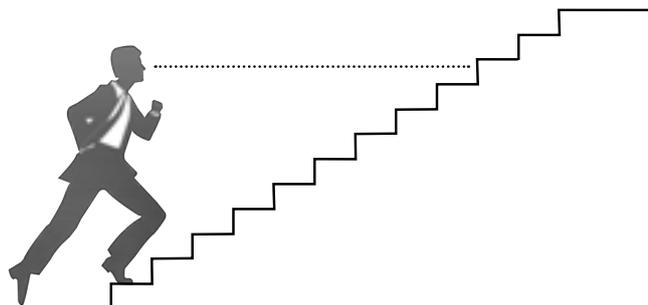


**MARKER** absence of glare

# MARKER



## S.6325W

MID-POWER LEDs **3000K** CRI80 530lm  
 Rated luminaire luminous flux 67lm  
 Rated input power 8,3W  
 220V-240V AC 50/60Hz / DC Not Dimmable  
 Recessing box not included  
**Reinforced fixing system with screws.**





## S.6329

**RECESSING BOX**  
 for MARKER  
 305 x 79mm  
 Depth 86mm




# WALKER



## S.6320W

MID-POWER LEDs **3000K** CRI90 1090lm  
 Rated luminaire luminous flux 346lm  
 Rated input power 13,5W  
 220V-240V AC 50/60Hz / DC Not Dimmable  
 Recessing box not included  
**Spring lock system for a total absence of visible screws.**



## S.6329

**RECESSING BOX**  
 for WALKER  
 305 x 79mm  
 Depth 86mm

