

Brick of light

Design P. Rizzato

RICARICABILE DA APPOGGIO Rechargeable freestanding luminaire




L.250 H.120 D.55

PARETE DA INCASSO Wall recessed



L.250 H.55 D.120

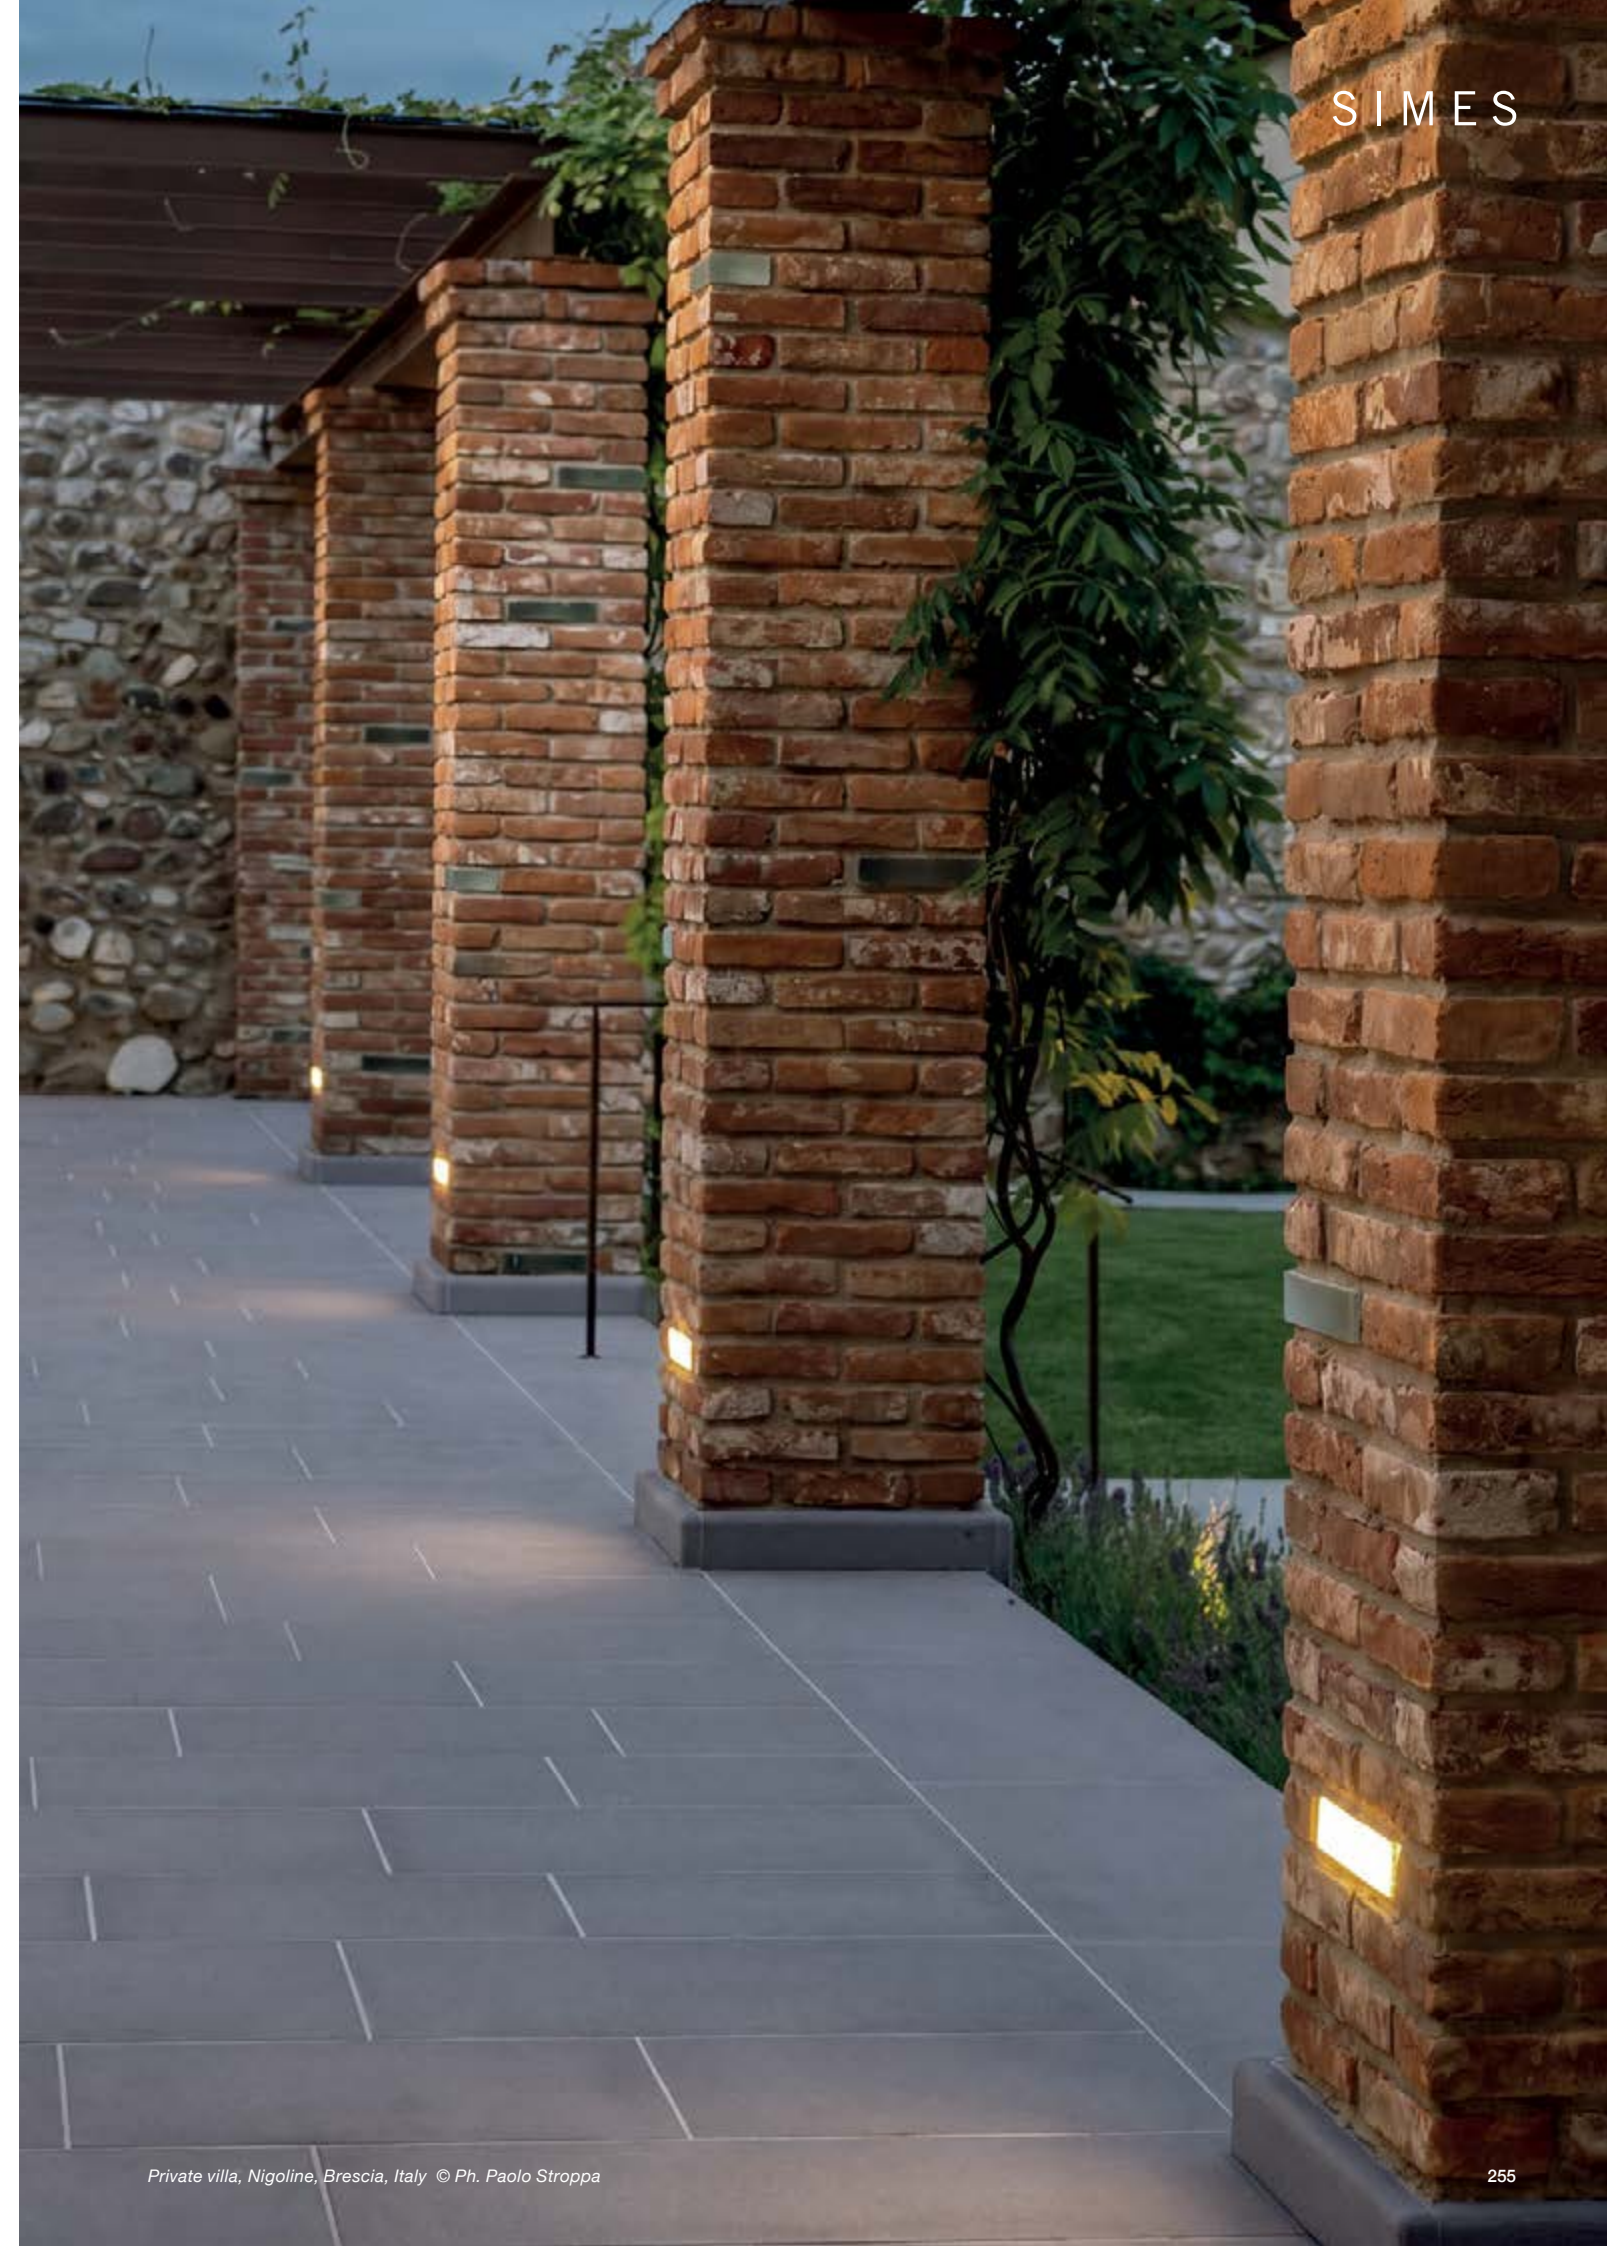



Brick of light

Design P. Rizzato

SIMES

DESCRIZIONE TECNICA Technical description		INFORMAZIONI GENERALI General information	CODICI COLORE Colour codes
Struttura in alluminio pressofuso. Diffusore in vetro pieno stampato e acidato. Precablato con cavo per versione incasso a parete. Batteria ricaricabile e pulsante laterale di accensione per versione da appoggio con 3 step di dimmerazione. Die-cast aluminum housing. Diffuser in acid-etched pressed glass. Pre-wired wall recessed version. Rechargeable battery and side power button for stand alone version with 3 dimmable steps.		GRADO DI PROTEZIONE IP rating IP65	.01 Bianco White
		CLASSE DI ISOLAMENTO Insulation class CLASS III ⚡	
		RESISTENZA IMPATTO Mechanical resistance IK 08	
			BREVETTATO Patented
			MODELLO REGISTRATO Registered design

PARETE DA INCASSO

Wall recessed

BRICK OF LIGHT INCASSO L250
Brick of light wall recessed L250

CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
B.9000H	2700 K		90	184 lm	3.1 W	24 Vdc remote (p.554)	PWM
B.9000W	3000 K		90	202 lm	3.1 W	24 Vdc remote (p.554)	PWM
B.9000N	4000 K		90	211 lm	3.1 W	24 Vdc remote (p.554)	PWM

RICARICABILE DA APPOGGIO

Rechargeable freestanding luminaire

BRICK OF LIGHT DA APPOGGIO L250
Brick of light stand alone L250

CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
B.9005H	2700 K		90	114 lm	1.7 W	5 Vdc BATTERY	PUSH
B.9005W	3000 K		90	120 lm	1.7 W	5 Vdc BATTERY	PUSH
B.9005N	4000 K		90	129 lm	1.7 W	5 Vdc BATTERY	PUSH

SOLO VETRO (non luminoso)

Glass only (no lighting)

BRICK VETRO DECORATIVO L250
Decorative brick glass L250

CODE
B.9009