



PARETE Wall mounted

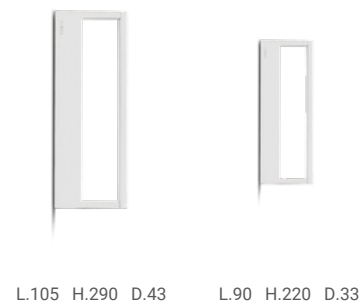

L.105 H.290 D.43 L.90 H.220 D.33

PALETTO Bollard

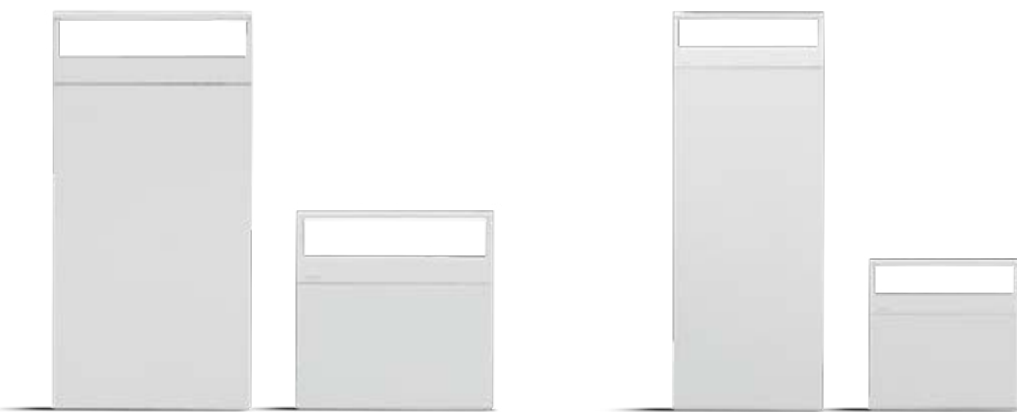

L.290 H.580 D.43 L.290 H.290 D.43 L.220 H.580 D.33 L.220 H.220 D.33



DESCRIZIONE TECNICA Technical description	INFORMAZIONI GENERALI General information		CODICI COLORE Colour codes
Struttura in alluminio pressofuso. Paletti in alluminio estruso. Diffusore in vetro temprato acidato extrachiaro. Viti in acciaio con rivestimento anticorrosivo. Precablato con cavo per Minicool applique e Minicool paletto. Entrata cavo singola per Cool applique e Cool paletto. Die-cast aluminium housing Bollards in extruded aluminium. Extra-clear acid-etched toughened glass diffuser. Steel screws with anticorrosive coating. Pre-wired Minicool applique and Minicool bollard. Single cable entry for Cool applique and Cool bollard.	GRADO DI PROTEZIONE IP rating	IP54	.01 Bianco White .09 Nero Black .14 Grigio alluminio Aluminium Grey
	CLASSE DI ISOLAMENTO Insulation class	CLASS II  (Minicool)	
		CLASS I  (Cool)	
	RESISTENZA IMPATTO Mechanical resistance	IK 06	

PARETE L220

Wall mounted L220

MINICOOL APPLIQUE H220

CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7231H	2700K		90	890 lm	8.9 W	220-240Vac	Dali2/Push
S.7231W	3000K		90	915 lm	8.9 W	220-240Vac	Dali2/Push
S.7231N	4000K		90	949 lm	8.9 W	220-240Vac	Dali2/Push

PALETTO L220

Bollard L220

MINICOOL PALETTO H220


Minicool bollard H220

CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7236H	2700K		90	890 lm	8.9 W	220-240Vac	Dali2/Push
S.7236W	3000K		90	915 lm	8.9 W	220-240Vac	Dali2/Push
S.7236N	4000K		90	949 lm	8.9 W	220-240Vac	Dali2/Push

MINICOOL PALETTO H580

Minicool bollard H580

CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7241H	2700K		90	890 lm	8.9 W	220-240Vac	Dali2/Push
S.7241W	3000K		90	915 lm	8.9 W	220-240Vac	Dali2/Push
S.7241N	4000K		90	949 lm	8.9 W	220-240Vac	Dali2/Push



ACCESSORI PER TUTTE LE VERSIONI DI MINICOOL PALETTO Accessories for all Minicool bollard versions

S.7249 Flangia da interrare per Minicool paletto Flange to be buried for Minicool bollard

PARETE L290

Wall mounted L290

COOL APPLIQUE H290

CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7270H	2700K		90	1220 lm	11.5 W	220-240Vac	Dali2/Push
S.7270W	3000K		90	1254 lm	11.5 W	220-240Vac	Dali2/Push
S.7270N	4000K		90	1301 lm	11.5 W	220-240Vac	Dali2/Push

PALETTO L290

Bollard L290

COOL PALETTO H290


Cool bollard H290

CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7245H	2700K		90	1220 lm	11.5 W	220-240Vac	Dali2/Push
S.7245W	3000K		90	1254 lm	11.5 W	220-240Vac	Dali2/Push
S.7245N	4000K		90	1301 lm	11.5 W	220-240Vac	Dali2/Push

COOL PALETTO H580

Cool bollard H580

CODE	CCT	BEAM	CRI	FLUX	POWER	POWER SUPPLY	DIMMING
S.7246H	2700K		90	1220 lm	11.5 W	220-240Vac	Dali2/Push
S.7246W	3000K		90	1254 lm	11.5 W	220-240Vac	Dali2/Push
S.7246N	4000K		90	1301 lm	11.5 W	220-240Vac	Dali2/Push



ACCESSORI PER TUTTE LE VERSIONI DI COOL PALETTO Accessories for all Cool bollard versions

S.7269 Flangia da interrare per Cool paletto Flange to be buried for Cool bollard

